

Day-Brite


CFI

by Signify

Linear

SLS Linkable strip

2ft & 4ft

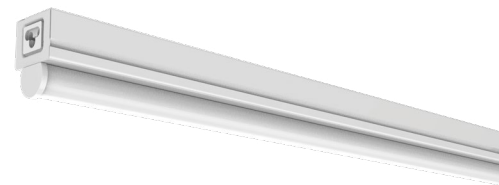

Day-Brite / CFI SLS Linkable strip offers flexibility for light commercial or residential applications. Whether mounting as a single unit or using the linkable option for continuous rows, the small size is just right for areas such as coves, shelves, work desks, or storage areas.

Project: _____
Location: _____
Cat.No: _____
Type: _____
Lumens: _____ Qty: _____
Notes: _____

Ordering guide

Example: SLS432L840-UNV

Series	Length (nominal)	Lumens ¹ (nominal)	Color temp. (K)	Voltage
SLS			840 –	UNV
SLS Linkable strip LED	2 2' length	16L 1600 lumens	840 80 CRI, 4000K	UNV Universal voltage 120-277V (non-dimmable)
	4 4' length	32L 3200 lumens		

1. Nominal delivered lumens at 25°C ambient.

General notes

- All options are factory installed.
- Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.




SLS Linkable strip

2ft & 4ft


Features

- White painted metal housing for durability.
- Frosted acrylic lens for even, low glare lighting.
- Hardware for surface mounting included.
- Easy installation with holes provided in housing.
- Power cords and power interconnects provided to link fixtures together if desired. Maximum number of fixtures linked together is 15 for the 2' unit & 8 for the 4' unit.
- cULus listed to meet UL 1598 standards for -10C to 35C ambient.
- Suitable for damp locations.
- 5 year manufacturer's limited warranty. Visit www.signify.com/warranties for complete warranty information.

Dimensions

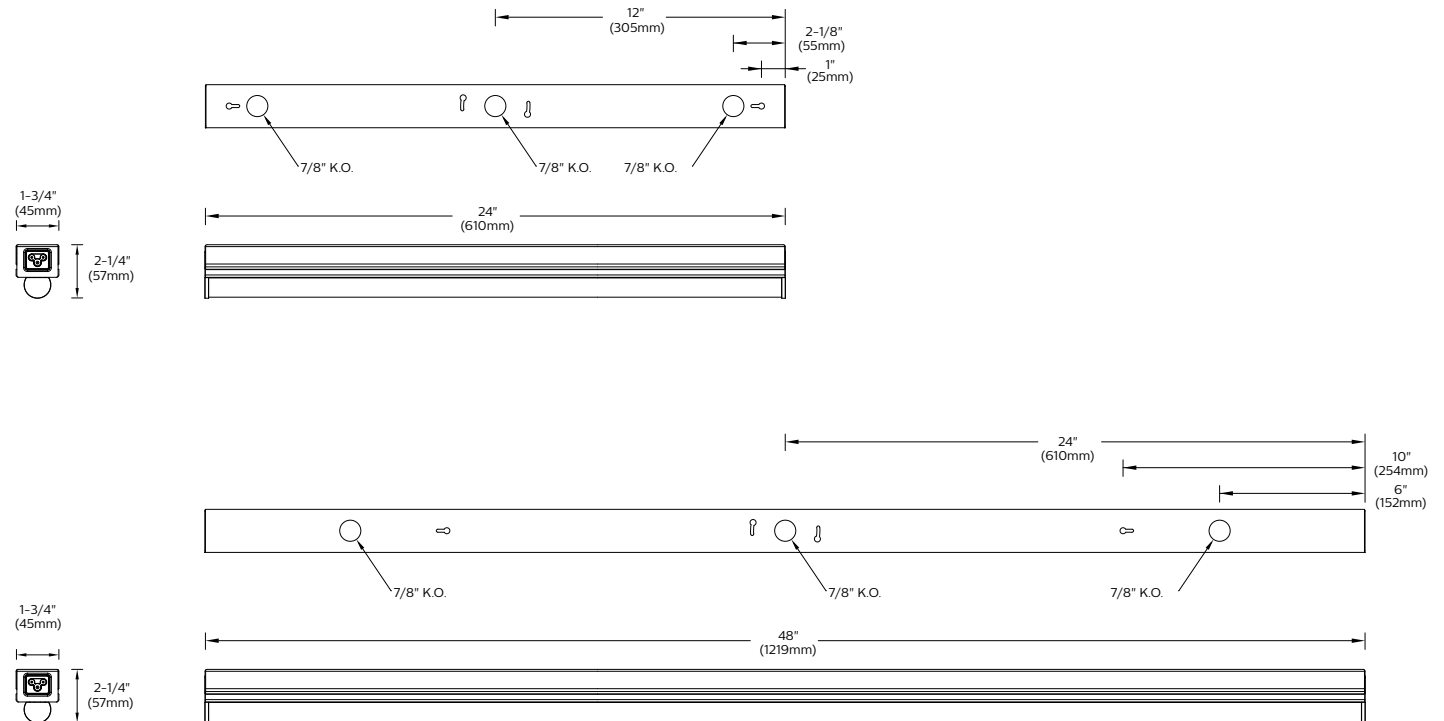

Hardware included

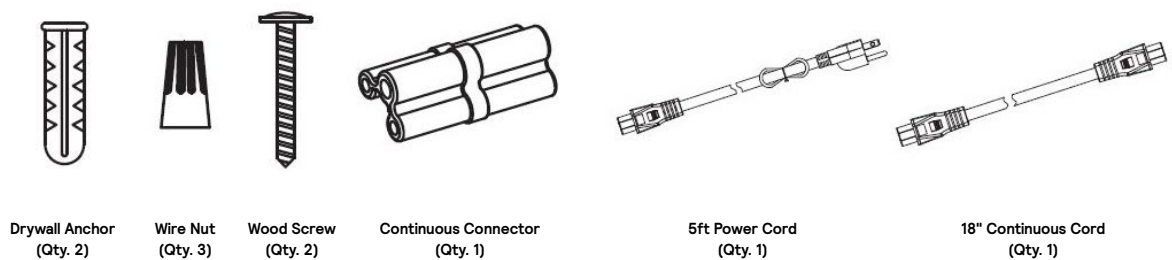

SLS Linkable strip

2ft & 4ft

Photometry

2' Linkable strip LED, 1,600 nominal delivered lumens

Catalog No. SLS216L840-UNV Test No. WB19040754P-1 S/MH 1.2 Lamp Type LED Lumens 1597 LPW 102 Input Watts 15.6	Candlepower					Light Distribution			Average Luminance																																																																																																																																								
	Angle End 45 Cross Back-45 0 407 407 407 407 5 403 392 401 403 15 385 379 394 389 25 350 356 378 363 35 304 322 356 329 45 248 286 329 289 55 188 243 296 247 65 124 202 260 206 75 62 162 222 165 85 14 124 185 125 95 5 92 148 95 105 1 48 1 49 115 4 8 72 23 125 3 1 5 1 135 3 1 1 2 145 2 2 1 2 155 2 2 1 2 165 2 2 2 2 175 2 2 2 2	Degrees Lumens % Luminaire 0-30 314 19.7 0-40 520 32.5 0-60 960 60.1 0-90 1448 90.7 90-180 149 9.3 0-180 1597 100.0	Angle 0° 45° 90° 45 21723 15024 15008 55 19926 13309 13696 65 17338 11931 12640 75 13285 10806 11723 85 7192 9734 11043																																																																																																																																														
Comparative yearly lighting energy cost per 1000 lumens – \$2.34 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.																																																																																																																																																	
						Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)																																																																																																																																											
						<table border="1"> <thead> <tr> <th rowspan="2">pcc</th> <th colspan="3">80</th> <th colspan="3">70</th> <th colspan="2">50</th> </tr> <tr> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> </thead> <tbody> <tr> <td>pw</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>RCR</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>0</td> <td>117</td><td>117</td><td>117</td> <td>113</td><td>113</td><td>113</td> <td>106</td><td>106</td> </tr> <tr> <td>1</td> <td>103</td><td>97</td><td>92</td> <td>100</td><td>94</td><td>89</td> <td>88</td><td>84</td> </tr> <tr> <td>2</td> <td>93</td><td>83</td><td>75</td> <td>89</td><td>80</td><td>73</td> <td>75</td><td>69</td> </tr> <tr> <td>3</td> <td>84</td><td>72</td><td>63</td> <td>81</td><td>70</td><td>61</td> <td>65</td><td>58</td> </tr> <tr> <td>4</td> <td>77</td><td>63</td><td>54</td> <td>73</td><td>61</td><td>52</td> <td>58</td><td>50</td> </tr> <tr> <td>5</td> <td>70</td><td>56</td><td>47</td> <td>67</td><td>55</td><td>46</td> <td>51</td><td>44</td> </tr> <tr> <td>6</td> <td>65</td><td>50</td><td>41</td> <td>62</td><td>49</td><td>40</td> <td>46</td><td>3</td> </tr> <tr> <td>7</td> <td>60</td><td>46</td><td>36</td> <td>57</td><td>44</td><td>36</td> <td>42</td><td>34</td> </tr> <tr> <td>8</td> <td>56</td><td>41</td><td>33</td> <td>53</td><td>40</td><td>32</td> <td>38</td><td>31</td> </tr> <tr> <td>9</td> <td>52</td><td>38</td><td>29</td> <td>50</td><td>37</td><td>29</td> <td>35</td><td>28</td> </tr> <tr> <td>10</td> <td>49</td><td>35</td><td>27</td> <td>47</td><td>34</td><td>26</td> <td>32</td><td>25</td> </tr> </tbody> </table>						pcc	80			70			50		70	50	30	70	50	30	50	30	pw									RCR									0	117	117	117	113	113	113	106	106	1	103	97	92	100	94	89	88	84	2	93	83	75	89	80	73	75	69	3	84	72	63	81	70	61	65	58	4	77	63	54	73	61	52	58	50	5	70	56	47	67	55	46	51	44	6	65	50	41	62	49	40	46	3	7	60	46	36	57	44	36	42	34	8	56	41	33	53	40	32	38	31	9	52	38	29	50	37	29	35	28	10	49	35	27	47	34	26	32	25
pcc	80			70			50																																																																																																																																										
	70	50	30	70	50	30	50	30																																																																																																																																									
pw																																																																																																																																																	
RCR																																																																																																																																																	
0	117	117	117	113	113	113	106	106																																																																																																																																									
1	103	97	92	100	94	89	88	84																																																																																																																																									
2	93	83	75	89	80	73	75	69																																																																																																																																									
3	84	72	63	81	70	61	65	58																																																																																																																																									
4	77	63	54	73	61	52	58	50																																																																																																																																									
5	70	56	47	67	55	46	51	44																																																																																																																																									
6	65	50	41	62	49	40	46	3																																																																																																																																									
7	60	46	36	57	44	36	42	34																																																																																																																																									
8	56	41	33	53	40	32	38	31																																																																																																																																									
9	52	38	29	50	37	29	35	28																																																																																																																																									
10	49	35	27	47	34	26	32	25																																																																																																																																									

4' Linkable strip LED, 3,200 nominal delivered lumens

Catalog No. SLS432L840-UNV Test No. WB19040754P-2 S/MH 1.2 Lamp Type LED Lumens 3047 LPW 104 Input Watts 29.3	Candlepower					Light Distribution			Average Luminance																																																																																																																																								
	Angle End 45 Cross Back-45 0 763 763 763 763 5 754 737 755 756 15 724 715 740 731 25 664 672 710 683 45 481 540 620 536 55 361 464 559 462 65 240 687 493 383 75 127 308 422 310 85 29 240 351 236 95 6 176 280 178 105 5 102 34 108 115 4 34 137 55 125 3 7 14 20 135 3 3 8 3 145 3 3 2 3 155 3 3 3 3 165 4 3 3 3 175 4 4 4 4	Degrees Lumens % Luminaire 0-30 591 19.4 0-40 979 32.1 0-60 1813 59.5 0-90 2740 89.9 90-180 307 10.1 0-180 3047 100.0	Angle 0° 45° 90° 45 21512 14304 14145 55 19741 12863 12947 65 17514 11586 11985 75 14682 10403 11127 85 8574 9613 10457																																																																																																																																														
Comparative yearly lighting energy cost per 1000 lumens – \$2.31 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.																																																																																																																																																	
						Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)																																																																																																																																											
						<table border="1"> <thead> <tr> <th rowspan="2">pcc</th> <th colspan="3">80</th> <th colspan="3">70</th> <th colspan="2">50</th> </tr> <tr> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> </thead> <tbody> <tr> <td>pw</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>RCR</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>0</td> <td>117</td><td>117</td><td>117</td> <td>113</td><td>113</td><td>113</td> <td>106</td><td>106</td> </tr> <tr> <td>1</td> <td>103</td><td>97</td><td>92</td> <td>99</td><td>94</td><td>89</td> <td>88</td><td>84</td> </tr> <tr> <td>2</td> <td>93</td><td>83</td><td>75</td> <td>89</td><td>80</td><td>73</td> <td>75</td><td>69</td> </tr> <tr> <td>3</td> <td>84</td><td>72</td><td>63</td> <td>80</td><td>70</td><td>61</td> <td>65</td><td>58</td> </tr> <tr> <td>4</td> <td>76</td><td>63</td><td>54</td> <td>73</td><td>61</td><td>52</td> <td>57</td><td>50</td> </tr> <tr> <td>5</td> <td>70</td><td>56</td><td>47</td> <td>67</td><td>54</td><td>45</td> <td>51</td><td>43</td> </tr> <tr> <td>6</td> <td>64</td><td>50</td><td>41</td> <td>62</td><td>49</td><td>40</td> <td>46</td><td>38</td> </tr> <tr> <td>7</td> <td>60</td><td>45</td><td>36</td> <td>57</td><td>44</td><td>36</td> <td>42</td><td>34</td> </tr> <tr> <td>8</td> <td>55</td><td>41</td><td>33</td> <td>53</td><td>40</td><td>32</td> <td>38</td><td>31</td> </tr> <tr> <td>9</td> <td>52</td><td>38</td><td>29</td> <td>50</td><td>37</td><td>29</td> <td>35</td><td>28</td> </tr> <tr> <td>10</td> <td>48</td><td>35</td><td>27</td> <td>47</td><td>34</td><td>26</td> <td>32</td><td>25</td> </tr> </tbody> </table>						pcc	80			70			50		70	50	30	70	50	30	50	30	pw									RCR									0	117	117	117	113	113	113	106	106	1	103	97	92	99	94	89	88	84	2	93	83	75	89	80	73	75	69	3	84	72	63	80	70	61	65	58	4	76	63	54	73	61	52	57	50	5	70	56	47	67	54	45	51	43	6	64	50	41	62	49	40	46	38	7	60	45	36	57	44	36	42	34	8	55	41	33	53	40	32	38	31	9	52	38	29	50	37	29	35	28	10	48	35	27	47	34	26	32	25
pcc	80			70			50																																																																																																																																										
	70	50	30	70	50	30	50	30																																																																																																																																									
pw																																																																																																																																																	
RCR																																																																																																																																																	
0	117	117	117	113	113	113	106	106																																																																																																																																									
1	103	97	92	99	94	89	88	84																																																																																																																																									
2	93	83	75	89	80	73	75	69																																																																																																																																									
3	84	72	63	80	70	61	65	58																																																																																																																																									
4	76	63	54	73	61	52	57	50																																																																																																																																									
5	70	56	47	67	54	45	51	43																																																																																																																																									
6	64	50	41	62	49	40	46	38																																																																																																																																									
7	60	45	36	57	44	36	42	34																																																																																																																																									
8	55	41	33	53	40	32	38	31																																																																																																																																									
9	52	38	29	50	37	29	35	28																																																																																																																																									
10	48	35	27	47	34	26	32	25																																																																																																																																									

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

