

## Read and understand these instructions Before installing luminaire (fixture)



This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding. Allow fixture to cool before handling.

Retain these instructions for maintenance reference

### Installation for

Calculite Trims:

- C3R & C3S series

Calculite Light Engines:

- C3L Series

LyteProfile LE /Trims:


- P3R & P3S series

### Caution (RISK OF FIRE)

Use only with LED light engines and reflector Trims provided by Signify. Use of other manufacturers trims may void the Underwriters Laboratories listing and could constitute a fire hazard.

## Instructions for all applications


Fig.A

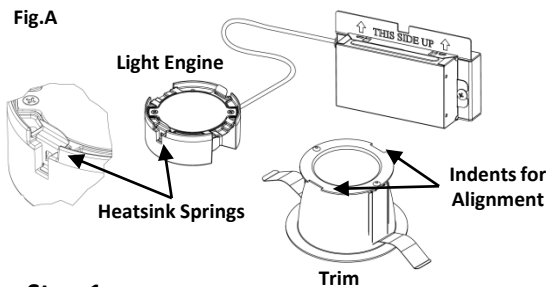

### Step 1

For C3 Series Only, Snap *Light Engine* to *Trim* by aligning the indents on *Trim* to the heatsink springs (Fig. A.). If the *Light Engine* is not properly aligned with the heatsink spring, damage could occur. Lift one spring outwards to allow *Trim* to easily snap securely to *Light Engine*.


Fig.B

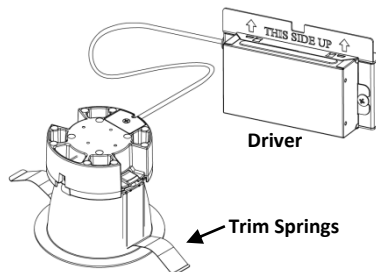

### Step 2

Feed driver from light engine through the aperture hole in the ceiling and snap into j-box door (Fig. C.).

Fig.C

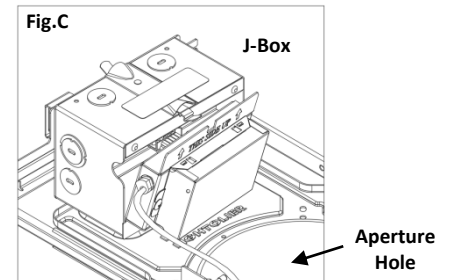


### Step 3

Squeeze Trim Springs up against Trim in order to push the Trim into the ceiling (Fig. B.).

Note: Trim can be removed by grasping reflector flange and pulling straight down. Images above represent multiple construction types





## Veillez lire et vous assurer de comprendre ces instructions avant d'installer votre luminaire

Ce luminaire doit être installé conformément au Code national de l'électricité et aux réglementations locales. Pour vous assurer de la conformité totale aux codes et règlements locaux, vérifiez auprès de votre inspecteur en électricité local avant l'installation. Pour éviter tout risque d'électrocution, coupez l'électricité au niveau de la boîte à fusibles avant de continuer. Laissez refroidir le luminaire avant de le manipuler.

Conservez ces instructions à titre de référence pour l'entretien

### Installation pour

Garnitures Calculite : Modules de luminaires Calculite :

- Séries C3R et C3S
- Série C3L

LE/garnitures LyteProfile :

- Séries P3R et P3S

### Attention (RISQUE D'INCENDIE)

Utilisation uniquement avec les modules de luminaires et réflecteurs DEL

Garnitures fournies par Signify. L'utilisation de garnitures d'autres fabricants peut annuler l'écoute de Underwriters Laboratories et pourrait constituer un risque d'incendie.

## Instructions pour toutes les applications

Fig. A

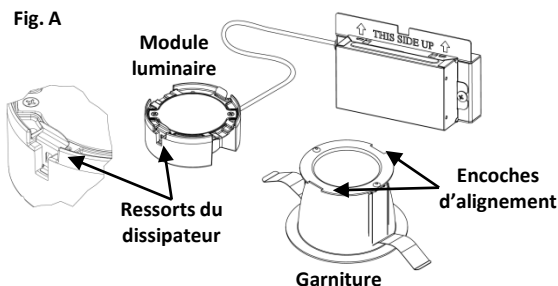


Fig. B


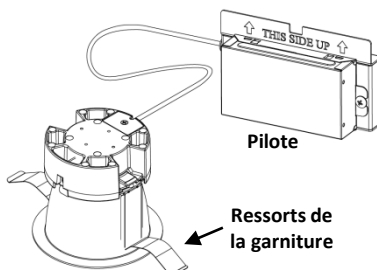


Fig. C

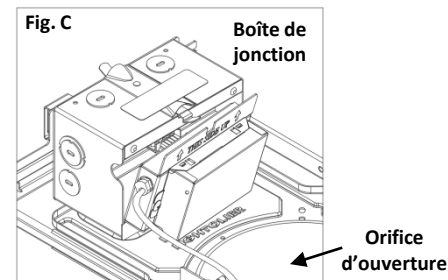

### Étape 1

Pour la **série C3** uniquement, clipsez le **module luminaire** à la **garniture** en alignant les encoches de la **garniture** sur les ressorts du dissipateur (Fig. A). Si le **module luminaire** n'est pas correctement aligné avec le ressort du dissipateur, des dommages peuvent survenir. Soulevez un ressort vers l'extérieur pour permettre à la **garniture** de s'enclencher facilement sur le **module luminaire**.

### Étape 2

Faites passer le pilote du module luminaire par l'orifice d'ouverture du plafond et enclenchez-le dans la porte de la boîte de jonction (Fig. C).

### Étape 3

Serrez les ressorts de la garniture contre la **garniture** afin de pousser la **garniture** dans le plafond (Fig. B).

Remarque : La **garniture** peut être retirée en saisissant la bride du réflecteur et en tirant vers le bas. Les images ci-dessus représentent divers types de construction

