
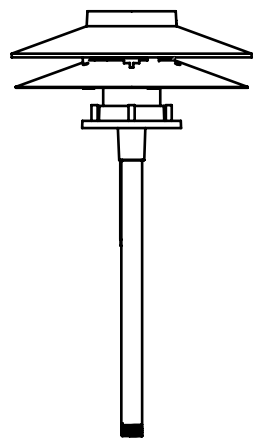


**INSTALLATION INSTRUCTIONS:  
RL4D3/RL4DW3/PTL3419D  
PATHLYTE**

ASSEMBLED FIXTURE

**Installation Instructions**

1. Make sure power is turned OFF before installing or servicing this fixture.
2. Pull fixture wires through the stem and attach the stem to the bottom of the fixture.
3. Attach fixture to a junction box or mounting stake that is UL listed for low voltage and wet locations.  
Mounting stakes S1, S6, S7, S8 or canopy MC1, M0040, M0041, or junction box TM1H may be used.
4. Wire fixture following the instructions for low voltage cable connector.  
Input voltage (VAC): **10.8-17 @ 60Hz**  
Fixture load: 6.5W max
5. Loosen roof screw, rotate roof counterclockwise, and pull up to remove roof and access the lens for cleaning.
6. Turn power ON.

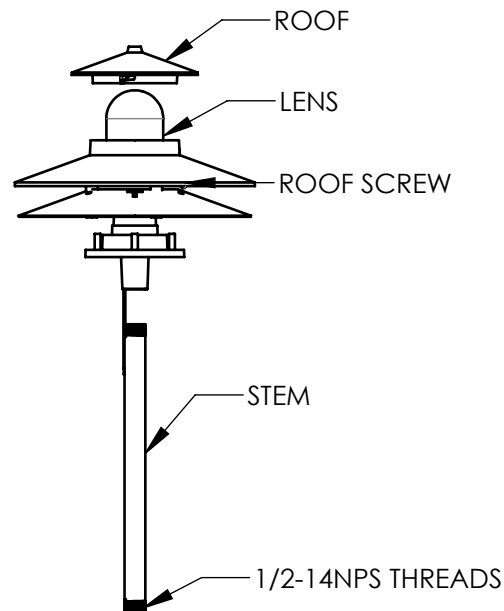

This fixture is intended for installation in accordance with the National Electrical Code and local code specifications. Failure to adhere to these codes and instructions may result in serious injury and/or damage to the ballast and void the warranty. These instructions do not purport to cover all details or variations in equipment, nor to provide for every possible contingency related to installation, operation, maintenance, or mounting situation. Should specific problems occur that are not addressed by these instructions, contact your Sales Representative or distributor for assistance. Retain these instructions for future reference.



**INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS-IMPORTANT SAFETY INSTRUCTIONS**  
Lighted lamp is HOT! WARNING- To reduce the risk of FIRE OR INJURY TO PERSONS: Turn off/unplug and allow to cool before replacing lamp. Lamp gets HOT quickly! Contact only switch/plug when turning on. Do not touch hot lens, guard, or enclosure (see diagram/picture). Keep lamp away from materials that may burn. Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp. Do not operate the luminaire fitting with a missing or damaged shield. **SAVE THESE INSTRUCTIONS.**  
Xenon lamps do not require additional shielding.

## Limited Warranty

Hadco warrants that its products (other than ballasts, lamps, and emergency battery packs) are free of defects in workmanship and materials. **SUCH WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Hadco, at its sole option, will repair or replace, F.O.B. our factory, freight prepaid, any Hadco product (other than ballasts, lamps and emergency battery packs) defective in workmanship or materials. **Such repair or replacement is the sole and exclusive remedy against Hadco and is limited to three years from date of original shipment by Hadco.** Hadco product which fails under normal operating conditions within the specified warranty period (lifetime for cast bronze products and stainless steel transformers, 10 years for composites and transformers, three years for aluminum fixtures) from date of invoice, provided it is returned to the factory, transportation prepaid, and our inspection determines it to be defective under terms of this warranty. Hadco reserves the right to determine whether to repair or replace. No charge-back, or charge for labor or material, that does not have Hadco's prior written approval from it's Corporate Offices will be honored, accepted or paid by Hadco. **Hadco will not be responsible for any consequential or incidental damages in connection with any breach of its aforementioned warranty.** Hadco will not be responsible for any products subjected to inappropriate application or installed or modified in any way that is not in accordance with Hadco's instructions. No agent, employee or representative of Hadco has any authority to bind Hadco to any affirmation, representation or warranty concerning goods sold by Hadco and unless an affirmation, representation or warranty made by an agent, employee or representative is specifically included herein, or in Hadco's acknowledgement.

## LOW VOLTAGE CABLE CONNECTOR INSTRUCTIONS

Low voltage cable connector to be used with 10 or 12 gauge supply cable and 18 gauge fixture cable. Hadco recommends using SPT-3 water resistant (marked "WA", "W" or similar marking) supply cable such as our SCW500-10/BSCW500-10 or our SCW100-12/BSCW100-12. Philips also recommends ordering the entire system, which includes the power console (maximum 25 Amps, 15 Volts per circuit), fixture(s) (low voltage cable connector included) and supply cable to ensure proper installation and operation.

When using our supply cable, it can be laid on top of the ground, placed under "ground cover" (that is, shallow burial less than 6 inches or 15.2 cm deep), or directly buried in accordance with the NEC. If not using our cable, per UL 1838-Standard for Low Voltage Landscape Lighting Systems, the secondary cable must be SPT-3 or suitable for wet locations, sunlight resistant and direct burial per UL 493 and sized per UL 1838, and it must be buried less than 6 inches (15.2 cm).

Philips recommends a minimum depth of 4 inches when burying in the lawn to prevent damage from aerators or other lawn plugging equipment.

The 18 gauge fixture cable (provided with fixture) must be protected by routing in close proximity to the fixture or secured to a building structure such as a house or deck. The fixture cable must be cut off so that it is connected to the low voltage cable connector within 6 inches (15.2 cm) of the fixture or the building structure. When making an underground connection to the 10 or 12 gauge supply cable (not provided), the fixture cable must not be buried more than 6 inches (15.2 cm).

WARNING-Mount the luminaire in or on non-combustible mounting surfaces only.

WARNING-Risk of Electric Shock. Install all luminaires 10 feet (3.05m) or more from a pool, spa, or fountain.

1. Connect the supply cable to the terminals on the power console (transformer) and turn ON.
2. Disassemble the connector by removing the Phillips head screw.
3. Inspect the connector to ensure the prongs are straight. If the prongs are bent, straighten with pliers.
4. Insert the end of the fixture cable into the square opening in the connector body. Bend wire over so that wire is laying in the recess marked '18 GA'. This will help hold the wire in place while performing steps 5 and 6. Only 2-wire cable is to be used and the common (smooth) wire and hot (ribbed) wires must be oriented as shown.
5. Press the supply cable into the recess marked '10,12/2 GA' on the connector body. Again the common (smooth) wires and the hot (ribbed) wires must be oriented as shown.
6. Press the connector cover onto the connector body, making sure the screw holes line up with each other.
7. Assemble the connector by tightening the Phillips head screw. NOTE: Make sure the metal prongs in the connector pierce all 4 wires; the fixture will light as the prongs pierce the wires.

