

Day-Brite

CFI

by  Signify

Industrial

Vaporlume DW

4' sealed industrial,
T5, T5HO, T8 or T12



Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Day-Brite / CFI Vaporlume sealed industrial DW is a wet location listed luminaire with a non-metal exterior, housing and lens assembly.

Ordering guide

Example: DWAE232-UNV-1/2-EBLHE

Family	Application	Lens	Hubs Installed	No. of Lamps Per Cross Section	Lamp Type	Voltage	Options
D	W	A	E		—	—	
D Sealed industrial	W Wet Location	A DR Acrylic	E Ends only	(not included) 1 2	28 28WT5 (46") 32 32WT8 (48") 48 38WT12 Slimline (48") 44HO 44WT8 380mA (48") 48HO 60WT12 800mA (48") 54HO 54WT5HO (46")	UNV Universal voltage 120/277V 120 120V 277 277V 347 347V	1/1 One 1-lamp ballast 1/2 One 2-lamp ballast EB Electronic ballast, <10% THD EB10R T8 electronic ballast, program rapid start, <10% THD EBHE T8 electronic ballast, high efficiency, std. ballast factor EBLHE T8 electronic ballast, high efficiency, low ballast factor EBHHE T8 electronic ballast, high efficiency, high ballast factor EBSD T8 electronic step dimming ballast, .88 ballast factor EBD7 Advance Mark 7 dimming ballast, 0-10V (low voltage) control EBDX Advance Mark 10 dimming ballast, phase control EBD Electronic dimming ballast, customer specified LT20 -20°F start option (use in conjunction with ballast option) E1 B100 emerg. ballast, T8, 350-450 lumens, 120/277V E7 B60 emerg. ballast, T8/T12, 600-700 lumens, 120/277V E5 B50 emerg. ballast, U.S. or Canada market, T8/T12, 1100-1400 lumens, UNV ES5T B50ST emerg. ballast w/self test, U.S. or Canada market, T8, 1100-1400 lumens, UNV E7LP LP550 emerg. ballast T5/T5HO, 430-700 lumens, 120/277V E6LP LP600 emerg. ballast U.S. or Canada market, T5/T5HO, 750-1325 lumens, 120/277V GLR Fusing, fast blow MD360W Wet location occupancy sensor, external
<p>Accessories (order separately)</p> <ul style="list-style-type: none"> • TBK Stainless Steel Top Bracket Kit (pair of brackets plus mounting hardware) • EBK Stainless Steel End Bracket Kit (pair of brackets plus mounting hardware) • WBK Stainless Steel Wraparound Kit (pair of brackets plus mounting hardware) • FKR-126 Chain hanger set (requires TBK) <p>See section 1600-OA for options info. and sheet 1455-IF for mounting hardware.</p>							



DW Vaporlume sealed industrial

4', T5, T5HO, T8, or T12

Application

- Acceptable for outdoor as well as indoor installations.
- Can be surface (wall/ceiling) or suspended mounted unless otherwise specified.
- Wet Location—Areas of high humidity, water vapor, rain, incidental water spray, or other non-corrosive or non-flammable liquid.
- Mounting brackets available, order separately.
- IP65 rating standard. IP67 configuration available.
- NSF Certified for non food zone installations.


Construction/Finish

- Non-conductive, non-corrosive housing.
- Smooth exterior surface for easy cleaning.
- White, molded fiberglass reinforced polyester body.
- High impact DR acrylic molded lens.
- Continuous closed cell, foam in-place gasket.
- ABS cam action latches.
- Lighting channel has high reflectance baked white enamel finish.
- Two gasketed threaded (1/2" trade size) wet location hubs installed.


Electrical

- Electronic ballasts are standard on high output (44HO and 48HO) models, please include EB ballast designator in catalog number. Magnetic HO ballasts are more expensive than electronic and are suitable for cold ambient applications only.
- Day-Brite's standard fixtures for high output T8 (380mA) and T12 (800mA) include ballasts rated for -20° F starting temperature where available.
- cULus listed for wet locations. Also suitable for damp locations.
- Self-contained fluorescent emergency ballasts available.

Dimensions

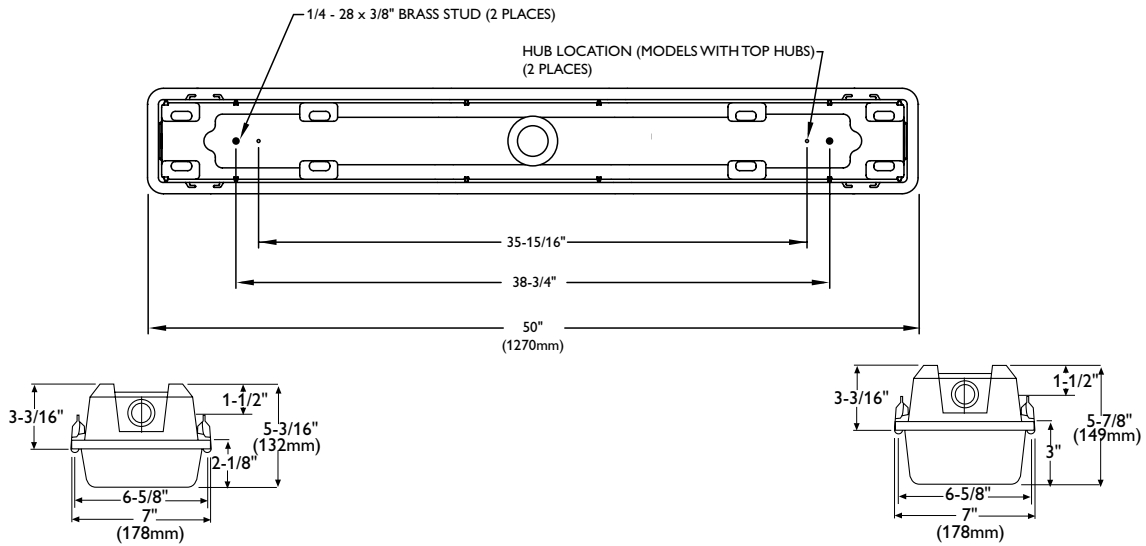

Mounting Brackets

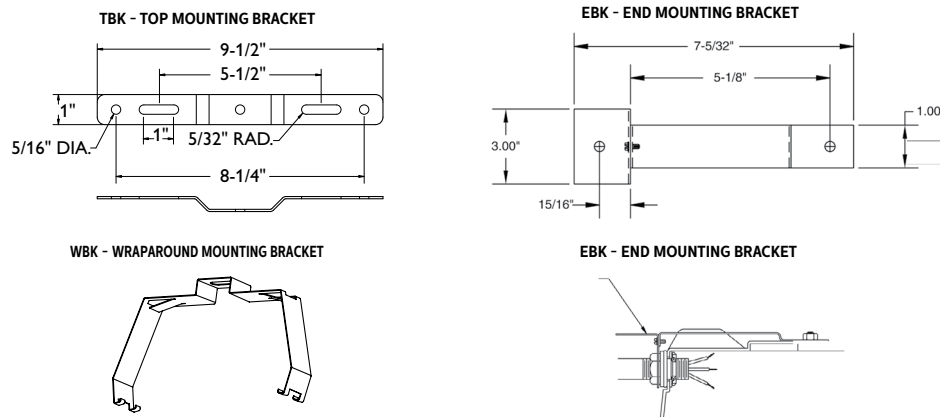

DW Vaporlume sealed industrial

4', T5, T5HO, T8, or T12

Photometry

DW 4' 2 Lamp F32T8

Efficiency – 85.1%

LER – 79

TER – 45

		Candlepower				Light Distribution				Average Luminance																																																																																																																															
		Angle	End	45	Cross	Degrees	Lumens	% Lamp	% Luminaire	Angle	End	45'	Cross																																																																																																																												
Catalog No.	DWAE232-120-1/2-EB	0	1109	1109	1109	0-30	905	15.9	18.7	45	5162	5457	5986																																																																																																																												
Test No.	20017D1	5	1102	1105	1104	0-40	1532	26.9	31.6	55	4608	5337	6090																																																																																																																												
S/MH	1.5	15	1066	1096	1116	0-60	2923	51.3	60.3	65	3872	5287	6339																																																																																																																												
Lamp Type	F32T8	25	988	1063	1117	0-90	4438	77.9	91.5	75	3090	5685	6743																																																																																																																												
Lumens/Lamp	2850	35	871	1007	1110	0-180	4850	85.1	100.0	85	2194	5573	6459																																																																																																																												
Ballast Factor	0.88	45	717	921	1065	Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table border="1"> <thead> <tr> <th rowspan="2">pcc</th> <th colspan="3">80</th> <th colspan="3">70</th> <th colspan="2">50</th> </tr> <tr> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> </thead> <tbody> <tr> <td>RCR</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>0</td> <td>100</td><td>100</td><td>100</td><td>95</td><td>95</td><td>95</td><td>91</td><td>91</td> </tr> <tr> <td>1</td> <td>88</td><td>82</td><td>78</td><td>84</td><td>80</td><td>76</td><td>75</td><td>71</td> </tr> <tr> <td>2</td> <td>79</td><td>70</td><td>64</td><td>76</td><td>68</td><td>61</td><td>64</td><td>58</td> </tr> <tr> <td>3</td> <td>70</td><td>60</td><td>53</td><td>68</td><td>58</td><td>52</td><td>56</td><td>48</td> </tr> <tr> <td>4</td> <td>65</td><td>54</td><td>45</td><td>61</td><td>52</td><td>44</td><td>48</td><td>41</td> </tr> <tr> <td>5</td> <td>58</td><td>47</td><td>39</td><td>56</td><td>46</td><td>38</td><td>42</td><td>36</td> </tr> <tr> <td>6</td> <td>55</td><td>42</td><td>34</td><td>53</td><td>40</td><td>34</td><td>39</td><td>32</td> </tr> <tr> <td>7</td> <td>51</td><td>38</td><td>29</td><td>48</td><td>36</td><td>29</td><td>34</td><td>28</td> </tr> <tr> <td>8</td> <td>46</td><td>34</td><td>27</td><td>45</td><td>34</td><td>27</td><td>32</td><td>26</td> </tr> <tr> <td>9</td> <td>44</td><td>32</td><td>25</td><td>41</td><td>30</td><td>23</td><td>28</td><td>23</td> </tr> <tr> <td>10</td> <td>40</td><td>28</td><td>22</td><td>40</td><td>28</td><td>22</td><td>27</td><td>20</td> </tr> </tbody> </table>							pcc	80			70			50		70	50	30	70	50	30	50	30	RCR									0	100	100	100	95	95	95	91	91	1	88	82	78	84	80	76	75	71	2	79	70	64	76	68	61	64	58	3	70	60	53	68	58	52	56	48	4	65	54	45	61	52	44	48	41	5	58	47	39	56	46	38	42	36	6	55	42	34	53	40	34	39	32	7	51	38	29	48	36	29	34	28	8	46	34	27	45	34	27	32	26	9	44	32	25	41	30	23	28	23	10	40	28	22	40	28	22	27	20
pcc	80			70										50																																																																																																																											
	70	50	30	70	50								30	50	30																																																																																																																										
RCR																																																																																																																																									
0	100	100	100	95	95								95	91	91																																																																																																																										
1	88	82	78	84	80								76	75	71																																																																																																																										
2	79	70	64	76	68								61	64	58																																																																																																																										
3	70	60	53	68	58								52	56	48																																																																																																																										
4	65	54	45	61	52								44	48	41																																																																																																																										
5	58	47	39	56	46								38	42	36																																																																																																																										
6	55	42	34	53	40	34	39	32																																																																																																																																	
7	51	38	29	48	36	29	34	28																																																																																																																																	
8	46	34	27	45	34	27	32	26																																																																																																																																	
9	44	32	25	41	30	23	28	23																																																																																																																																	
10	40	28	22	40	28	22	27	20																																																																																																																																	
Input Watts	54	55	528	796	973																																																																																																																																				
		65	336	661	867																																																																																																																																				
		75	174	552	739																																																																																																																																				
		85	53	369	511																																																																																																																																				
		95	19	199	323																																																																																																																																				
		105	15	112	190																																																																																																																																				
		115	7	56	83																																																																																																																																				
		125	3	28	39																																																																																																																																				
		135	2	13	23																																																																																																																																				
		145	4	7	13																																																																																																																																				
		155	4	4	6																																																																																																																																				
		165	5	5	7																																																																																																																																				
		175	6	7	8																																																																																																																																				

Comparative yearly lighting energy cost per 1000 lumens – **\$3.04** based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

