


LED Floodlight / LED 投光灯/ LED 投光燈

BVPI52&BVPI53 G3


Mounting Instructions / 安裝說明書 / 安裝說明書

V7.0




Product Type /產品型號	CCT (K) /色溫	Power(W) /功率	LEDs	Lumen Output (lm) /流明輸出*	 (m²)	 kg	Surge rating /浪湧	Voltage /電壓	Frequency /頻率
BVPI52 G3 LED9/830 10W 110-240V SWB	3000	10	28	985	0.006	0.194	1KV/2KV	110-130V~ /220-240V~	50/60Hz
BVPI52 G3 LED10/865 10W 110-240V SWB	6500			1050					
BVPI52 G3 LED28/830 30W 110-240V SWB	3000	30	56	2820	0.02	0.516			
BVPI52 G3 LED30/865 30W 110-240V SWB	6500			3000					
BVPI52 G3 LED47/830 50W 110-240V SWB	3000	50	84	4700	0.025	0.652			
BVPI52 G3 LED50/865 50W 110-240V SWB	6500			5000					
BVPI53 G3 LED94/830 100W 110-240V SWB	3000	100	168	9400	0.06	1.508	2KV/4KV		
BVPI53 G3 LED100/865 100W 110-240V SWB	6500			10000					
BVPI53 G3 LED141/830 150W 110-240V SWB	3000	150	252	14100	0.09	2.528			
BVPI53 G3 LED150/865 150W 110-240V SWB	6500			15000					
BVPI53 G3 LED188/830 200W 110-240V SWB	3000	200	336	18800	0.12	2.97			
BVPI53 G3 LED200/865 200W 110-240V SWB	6500			20000					

*燈具的流明輸出為典型值且會隨色溫或電壓的不同而略有變化

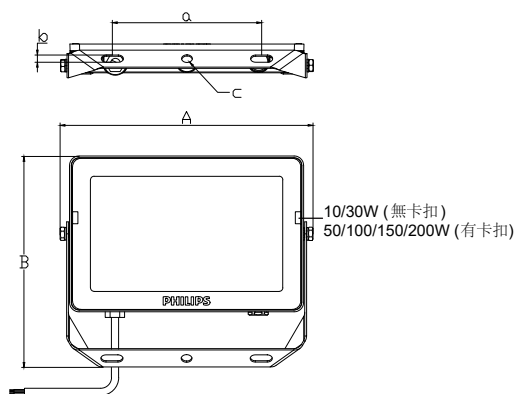

Type	10W	30W	50W	100W	150W	200W
A	110	190	213	323	388	455
B	105	156	176	254	316	356
C	26	27	28	34	39	39
D	68	120	130	200	250	290
a	45	100	125	160	200	210
b	5	6	8.5	8.5	8.5	10.5
c	5.5	6.5	9	9	9	11

外露電纜長度:10W:300mm;30/50/100/150/200W:600mm

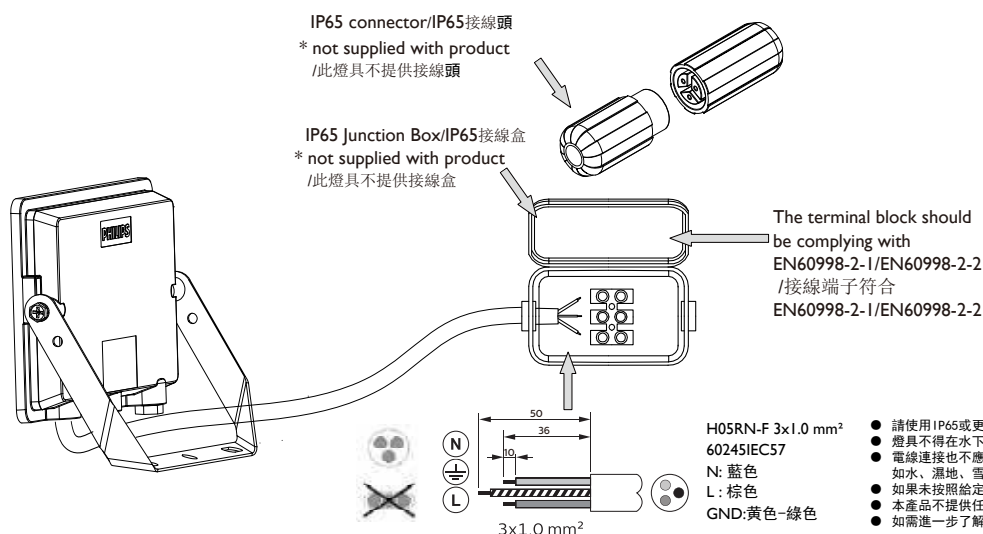

Signify Taiwan Co., Ltd.
Address : 2F-I, No. 508, Sec. 7, Zhongxiao E. Rd., Nangang Dist., Taipei City 115, Taiwan, R.O.C.

委製商/進口商: 台灣昕諾飛股份有限公司
地址: 台北市南港區忠孝東路七段508號2樓之一
服務電話: 0800-808268
原產地: 荷蘭昕諾飛授權於中國製造

PHILIPS

Philips and the Philips shield emblem are registered trademarks of Koninklijke Philips N.V.

LED Floodlight / LED 投光燈

BVPI52&BVPI53 G3


Mounting Instructions / 安裝說明書

V7.0

Product Type /產品型號	Run Current (A) /輸入電流 (A)		Start (Inrush) Current(A) /Ipeak (A) /衝擊電流 (A)	Start Current Duration (μs) /Tt(@50% of Ipeak) (μs) /衝擊電流脈衝寬度(μs)	* Touch current or protective conductor current (mA) /接觸電流(漏電流)或保護導體電流 (mA)	Maximum Number of Luminaire on MCB 16A Type B (pcs) /B型16A微型斷路器 允許連接此燈具數量(pcs)	Maximum Number of Luminaire on MCB 16A Type C (pcs) /C型16A微型斷路器 允許連接此燈具數量(pcs)
	110V	230V	230V	230V			
BVPI52 10W	0.095	0.048	<0.8	100	<3.5	106	124
BVPI52 30W	0.29	0.14	<2	100	<3.5	35	41
BVPI52 50W	0.47	0.24	<3	100	<3.5	21	24
BVPI53 100W	1	0.465	<6	100	<3.5	10	12
BVPI53 150W	1.38	0.695	<8	100	<3.5	7	8
BVPI53 200W	1.85	0.915	<10	100	<3.5	5	6

The leakage current *(touch current or protective conductor current) of electrical circuit may be greatly dependent upon electrical supply cables used such as its rating and length, proper connection of electrical supply cables to luminaires and wiring connection topology of luminaires to the supply electrical circuit amongst other site conditions.

* In some cases referred to as Earth Leakage Current.



no supplied with product
/不隨產品提供

Install the luminaire according to the national regulation and make sure it will not fall off.
按照國家標準安裝固定好燈具，確保其不會掉落。

2×
10W/20W:M4
30W:M5
50W:M6
100W/150W:M8
200W:M10

Fasten the bolt
/鎖緊兩側緊固螺釘
Torque : Nm
扭矩：Nm

	10W	30W	50W	100W	150W	200W
扭矩(Nm)	2.5	2.5	6	10	10	17

Please read this manual carefully before using the product.

1. Do not switch on before complete installation.
2. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
3. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
4. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
5. The luminaire is complied with IEC60598.
6. Luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur, Chlorine, phthalates, etc, are present.
7. For content of restricted substances, please refer to the Signify website at <https://www.smart-lighting.com.tw/ROHS>
Note: Please click the [ROHS Information] TAB under the [Support] list on the page

在使用產品前請仔細閱讀這個安裝說明書：

1. 接線過程中，切勿通電；
2. 此燈具應由有資格的電工安裝，接線要符合IEE電氣標準或國家標準；
3. 此燈具的外部軟纜或軟線不能替換；如果軟纜或軟線損壞，該燈具即應該報廢；
4. 此燈具的光源是不可替換的，當光源到其壽終時，應替換整個燈具；
5. 此燈具是依據IEC60598所製造；
6. 此燈具避免在腐蝕性環境或者含有有害物質，例如硫化物，鹵化物，鄰苯二甲酸酯等環境中存儲和使用。
7. 限用物質含有情況標示資訊請參考諾飛網址 <https://www.smart-lighting.com.tw/ROHS>
說明：請點選頁面中[支援]清單下之[ROHS資訊]標籤

維修方式：
若燈具出現故障，請立即停止使用並關閉電源，聯絡專業人員處理。