


Dimensions

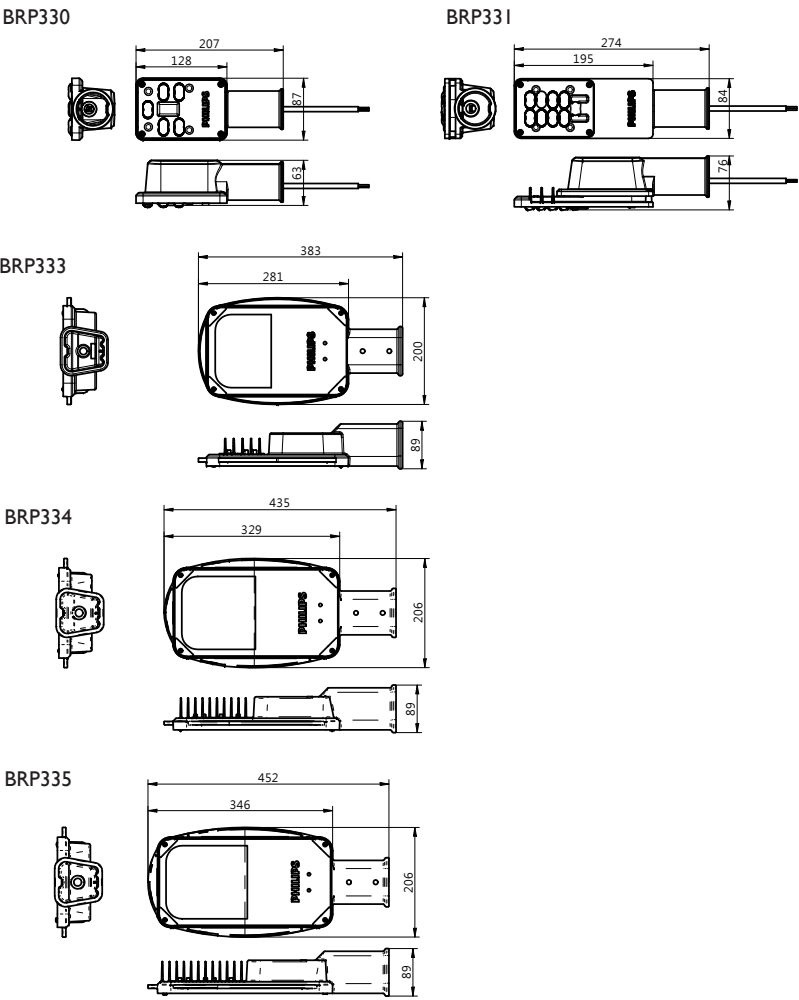


Installation Instruction

BRP330-335

Street Lighting Luminaire

Type	LEDs	Power (W)	Voltage (V)	Frequency (Hz)	CCT	IP	Weight (Kg)	Wind force area (m²)
BRP330 LED24	4	20	240~	50	3000K 4000K 5700K	66	0.6	0.017
BRP330 LED30	5	25					0.6	0.017
BRP331 LED36	6	30					0.85	0.023
BRP331 LED42	7	35					0.85	0.023
BRP331 LED48	8	40					0.85	0.023
BRP331 LED54	9	45					0.85	0.023
BRP333 LED110	20	90					2.5	0.077
BRP334 LED144	26	120					3	0.09
BRP335 LED180	32	150					3.2	0.093

\*Application: Outdoor use only

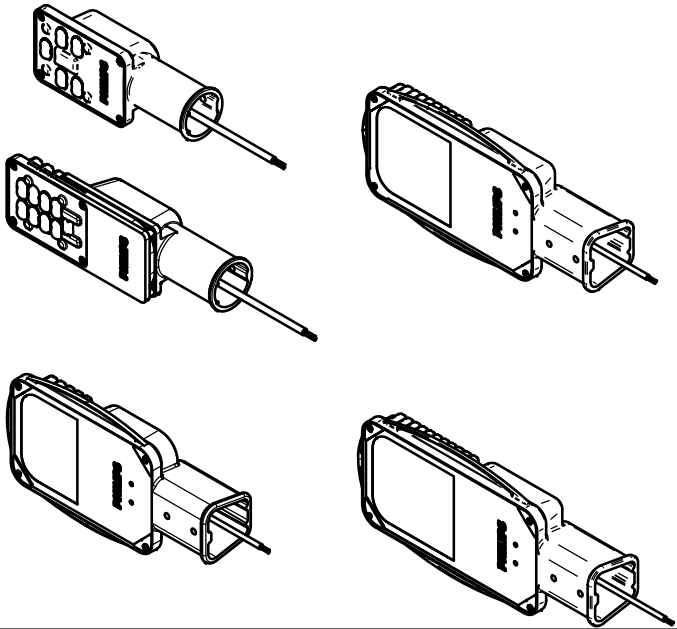


4415 109 28860

## Installation

Application height:

Pole Diameter 30-40mm: 4-6m

Pole Diameter 48-60mm: 7-11m



### BRP330-335


Mounting Position: Horizontal

Cable Diameter: 8-12mm




Pole Size:

30-40mm diameter up to 45W

48-60mm diameter above 45W




3 Fix the street light over the pole and tighten the bolts.

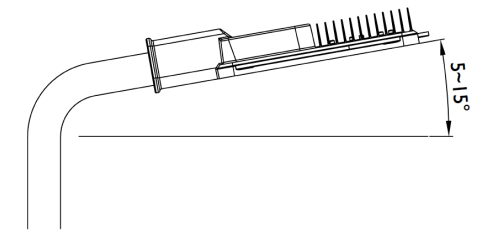


Tighten the screws, alternately and evenly.



1 Take the product out of the packing box.

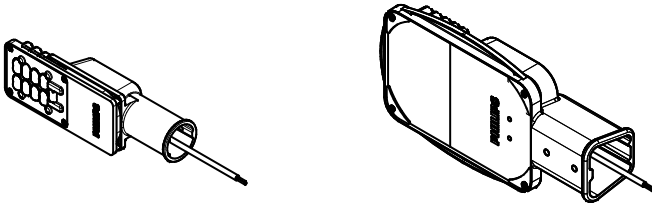

4 Luminaire is ready for use.

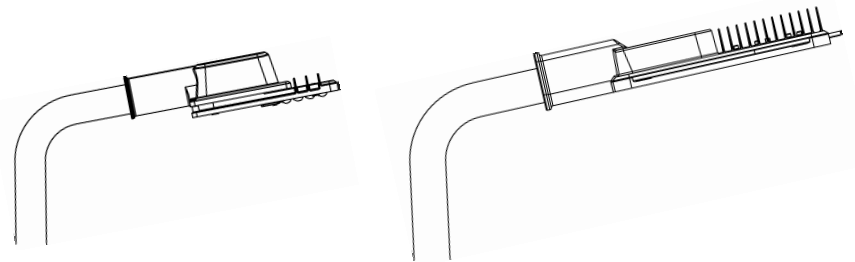

2 Connect the power cord. 60245 IEC57 3X1.0(~1.5)mm<sup>2</sup>



1. Always use IP66 or higher IP rated junction box/connector for wiring connection.
2. The Luminaire should never be used in submerged wet conditions e.g. under water, soil, snow etc.
3. The wiring connection should also never be used in submerged wet conditions e.g. water, soil, snow etc. OR must use IP68 junction box.
4. The warranty is void, in case any of the instructions / guidelines are not followed as per given mounting instruction.
5. This product is not supplied with any junction box / connector.
6. For further clarification, please contact the manufacturer.



### CAUTION:

Do not open front cover when connection power.

Broken Glass/front diffusers should be immediately replaced.