



Lumece Ancestra LED post top luminaires present a new twist on a classic design. By combining the best aspects of past and present forms with the best that modern technology has to offer, the **Ancestra** luminaires epitomizes Lumece's design philosophy beautifully: to combine the best technology with elegant design.

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat.No: \_\_\_\_\_

Type: \_\_\_\_\_

Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

## Ordering guide

example: AT20-72W32LED3K-G3-ACDR-LE3A-120-DMG-RC-GN8TX


Series	LED module	CCT	Gen.	Optical system	Voltage	Driver options	Options				Poles / Brackets	Finish
							Receptacle	Control	Luminaire	Decorative		
AT10 AT20 AT30 AT40	35W32LED <sup>1</sup> 55W32LED <sup>1</sup> 72W32LED <sup>7</sup> 55W48LED 80W48LED	2.2K <sup>8</sup> 2200K 3K 3000K 4K 4000K	G3 Gen3	ACRD-LE2A Type II (ASYM) w/acrylic globe ACRD-LE3A Type III (ASYM) w/acrylic globe ACRD-LE4A Type IV (ASYM) w/acrylic globe  LE2F Type II (ASYM) w/flat glass lens LE2S Type II (ASYM) w/sag glass lens LE3F Type III (ASYM) w/flat glass lens LE3S Type III (ASYM) w/sag glass lens LE4F Type IV (ASYM) w/flat glass lens LE4S Type IV (ASYM) w/sag glass lens LE5F <sup>2</sup> Type V (SYMM) w/flat glass lens LE5S <sup>2</sup> Type V (SYMM) w/sag glass lens	UNV 120- 277VAC 347 347VAC 480 480VAC	DMG 0-10V SRD <sup>1</sup> Sensor ready driver, standard configuration SRD1 <sup>1</sup> Sensor ready driver, alternate configuration	RC <sup>3,5</sup> Receptacle for twist-lock photo cell or shorting cap, 3-pin RCD7 <sup>3,4</sup> Receptacle, 7-pin	PH8 <sup>6</sup> Twist-lock Photoelectric Cell PH9 <sup>6</sup> Shorting cap PHXL <sup>1,6</sup> Twist-lock Photoelectric Cell, extended life, UNV (120-277VAC)	HS House Side Shield SP2 20kV/10kA Surge Protector TN2.875C Fitter to fit over a 2 7/8" (73 mm) O.D by 4" (102 mm) long tenon TN3 Fitter to fit over a 3" (76 mm) O.D by 4" (102 mm) long tenon TN3.5 Fitter to fit over a 31/2" (89 mm) O.D by 4" (102 mm) long tenon	CPT <sup>5</sup> Copper cupola CPTC <sup>5</sup> Varnished copper cupola DA Decorative arches DC Decorative cap DF10 Decorative cupola DF20 Decorative cupola FN1 <sup>5</sup> Decorative finial FN2 <sup>5</sup> Decorative finial FN3 <sup>5</sup> Decorative finial FN5 <sup>5</sup> Decorative finial FN6 <sup>5</sup> Decorative finial FN8 <sup>5</sup> Decorative finial FN9 <sup>5</sup> Decorative finial FN10 <sup>5</sup> Decorative finial FNC <sup>5</sup> Decorative finial painted copper WC <sup>4</sup> Without cupola	Visit us online at <a href="http://Signify.com/luminaires">Signify.com/luminaires</a> for details and the complete line of poles and brackets.	Textured  BE2TX Midnight Blue BE6TX Ocean Blue BE8TX Royal Blue BG2TX Sandstone BKT Black BRTX Bronze GN4TX Blue Green GN6TX Forest Green GN8TX Dark Forest Green GNTX Green GY3TX Medium Grey RD2TX Burgundy RD4TX Scarlet WHTX White  Other  GR Gray Sandtex NP Natural Aluminum TG Hammertone Gold

- Not available 347-480 volt.
- Not available with HS option.
- Use of photoelectric cell or shorting cap (PH9) is required to ensure proper illumination.
- If RCD7 is required you need to select WC without cupola.  
The RCD7 is located on top of the roof in place of the cupola for use with a control node.
- Not available with WC option.  
Note: 5 or 7 pin receptacle is required contact factory
- RC or RCD7 must be selected for this option.
- Not available with SRD or SRD1.
- Extended lead-time may apply (consult factory).

# AT10/AT20/AT30/AT40    Ancestra LED Post Top

## Urban Luminaire

### Dimensions

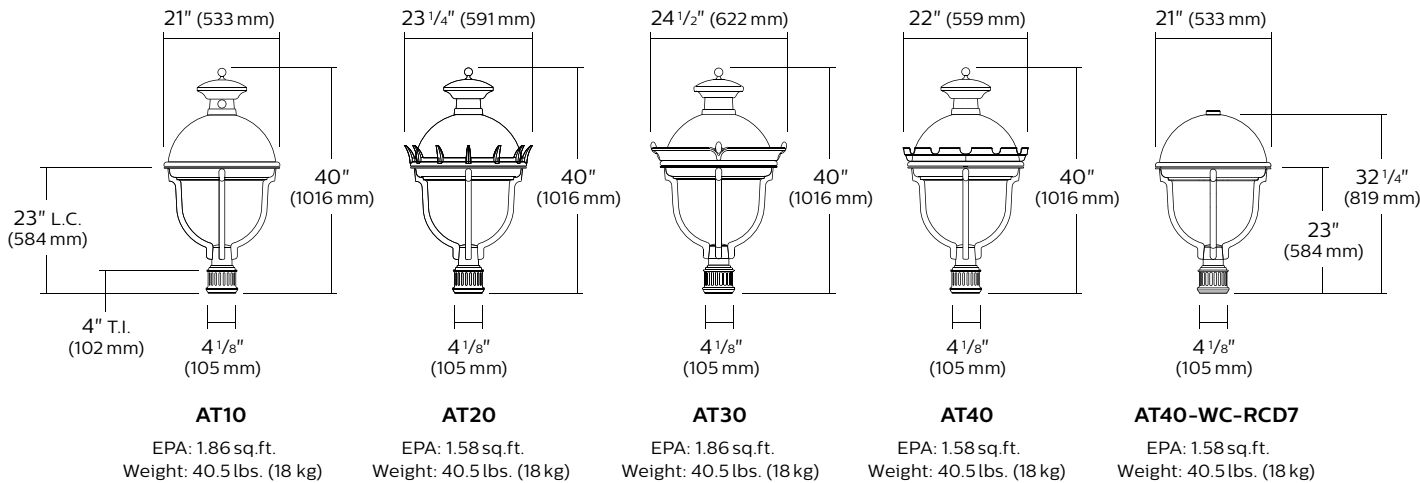

### Models



# AT10/AT20/AT30/AT40 Ancestra LED Post Top Urban Luminaire

## 3000K Lumen Values

Ordering Code	Total LEDs	LED current (mA)	Ave. System Wattage (W)	LE2F			LE3F			LE4F			LE5F		
				Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating
Flat Lens 3000K															
35W32LED3K-G3-x	32	350	37	4066	B1-U0-G1	110	4048	B1-U0-G1	109	4007	B1-U0-G1	108	3944	B3-U0-G1	107
55W32LED3K-G3-x	32	530	54	5833	B1-U0-G1	108	5807	B1-U0-G1	108	5747	B1-U0-G2	106	5657	B3-U0-G1	105
72W32LED3K-G3-x	32	700	73	7356	B2-U0-G1	101	7323	B1-U0-G2	100	7248	B1-U0-G2	99	7134	B3-U0-G2	98
55W48LED3K-G3-x	48	350	54	6100	B1-U0-G1	113	6072	B1-U0-G1	112	6010	B1-U0-G2	111	5916	B3-U0-G1	110
80W48LED3K-G3-x	48	530	80	8749	B2-U0-G1	109	8710	B2-U0-G2	109	8620	B2-U0-G2	108	8485	B3-U0-G2	106
Sag Lens 3000K															
35W32LED3K-G3-x	32	350	37	4203	B1-U0-G1	114	4099	B1-U0-G1	111	4069	B1-U0-G1	110	3911	B3-U0-G1	106
55W32LED3K-G3-x	32	530	54	6029	B1-U0-G1	112	5879	B1-U0-G1	109	5836	B1-U0-G2	108	5610	B3-U0-G1	104
72W32LED3K-G3-x	32	700	73	7603	B2-U0-G1	104	7415	B1-U0-G2	102	7361	B1-U0-G2	101	7075	B3-U0-G2	97
55W48LED3K-G3-x	48	350	54	6304	B1-U0-G1	117	6148	B1-U0-G2	114	6104	B1-U0-G2	113	5866	B3-U0-G1	109
80W48LED3K-G3-x	48	530	80	9043	B2-U0-G2	113	8819	B1-U0-G2	110	8755	B1-U0-G2	109	8414	B3-U0-G2	105
Prism Globe 3000K															
35W32LED3K-G3-x	32	350	37	4131	B1-U3-G1	112	4014	B1-U3-G1	108	4166	B1-U3-G1	113	—	—	—
55W32LED3K-G3-x	32	530	54	5926	B1-U3-G1	110	5691	B1-U3-G1	105	5976	B1-U3-G2	111	—	—	—
72W32LED3K-G3-x	32	700	73	7473	B2-U3-G2	102	7210	B2-U3-G2	99	7537	B1-U3-G2	103	—	—	—
55W48LED3K-G3-x	48	350	54	6197	B1-U3-G1	115	6119	B1-U3-G2	113	6249	B1-U3-G2	116	—	—	—
80W48LED3K-G3-x	48	530	80	8888	B2-U3-G2	111	8542	B2-U3-G2	107	8964	B2-U3-G2	112	—	—	—

## 4000K Lumen Values, multiply 4000K values by 0.769 for 2200K

Ordering Code	Total LEDs	LED current (mA)	Ave. System Wattage (W)	LE2F			LE3F			LE4F			LE5F		
				Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating
Flat Lens 4000K															
35W32LED4K-G3-x	32	350	37	4269	B1-U0-G1	115	4250	B1-U0-G1	115	4207	B1-U0-G1	114	4141	B3-U0-G1	112
55W32LED4K-G3-x	32	530	54	6125	B1-U0-G1	113	6097	B1-U0-G1	113	6034	B1-U0-G2	112	5940	B3-U0-G1	110
72W32LED4K-G3-x	32	700	73	7724	B2-U0-G1	106	7689	B1-U0-G2	105	7610	B1-U0-G2	104	7491	B3-U0-G2	103
55W48LED4K-G3-x	48	350	54	6405	B1-U0-G1	119	6376	B1-U0-G1	118	6311	B1-U0-G2	117	6212	B3-U0-G1	115
80W48LED4K-G3-x	48	530	80	9186	B2-U0-G2	115	9146	B2-U0-G2	114	9051	B2-U0-G2	113	8909	B3-U0-G2	111
Sag Lens 4000K															
35W32LED4K-G3-x	32	350	37	4413	B1-U0-G1	119	4304	B1-U0-G1	116	4272	B1-U0-G1	115	4107	B3-U0-G1	111
55W32LED4K-G3-x	32	530	54	6330	B1-U0-G1	117	6173	B1-U0-G1	114	6128	B1-U0-G2	113	5891	B3-U0-G1	109
72W32LED4K-G3-x	32	700	73	7983	B2-U0-G2	109	7786	B1-U0-G2	107	7729	B1-U0-G2	106	7429	B3-U0-G2	102
55W48LED4K-G3-x	48	350	54	6619	B1-U0-G1	123	6455	B1-U0-G2	120	6409	B1-U0-G2	119	6159	B3-U0-G1	114
80W48LED4K-G3-x	48	530	80	9495	B2-U0-G2	119	9260	B2-U0-G2	116	9193	B1-U0-G2	115	8835	B4-U0-G2	110
Prism Globe 4000K															
35W32LED4K-G3-x	32	350	37	4338	B1-U3-G1	117	4215	B1-U3-G1	114	4374	B1-U3-G1	118	—	—	—
55W32LED4K-G3-x	32	530	54	6222	B1-U3-G1	115	5976	B1-U3-G2	111	6275	B1-U3-G2	116	—	—	—
72W32LED4K-G3-x	32	700	73	7847	B2-U3-G2	107	7571	B2-U3-G2	104	7914	B1-U3-G2	108	—	—	—
55W48LED4K-G3-x	48	350	54	6507	B1-U3-G1	121	6425	B1-U3-G2	119	6561	B1-U3-G2	122	—	—	—
80W48LED4K-G3-x	48	530	80	9332	B2-U3-G2	117	8969	B2-U3-G2	112	9412	B2-U3-G2	118	—	—	—

Actual performance may vary due to installation variables including optics, mounting/ceiling height, dirt depreciation, light loss factor, etc.; highly recommended to confirm performance with a layout - contact Applications at [signify.com/outdoorluminaire](mailto:signify.com/outdoorluminaire). Consult DLC QPL to confirm your specific fixture selection is DLC approved. Note: Some data may be scaled based on tests of similar but not identical luminaires.

# AT10/AT20/AT30/AT40 Ancestra LED Post Top

## Urban Luminaire

### Specifications

#### Housing

**Finial:** Decorative cast 356 aluminum, mechanically assembled.

**Cupola:** Decorative spun aluminum 1100 O, mechanically mounted on hood.

**Hood:** Spun aluminum 1100 O dome, mechanically assembled on the luminaire.

**Guard:** In a round shape with 4 arms, this guard is a one piece cast aluminum 356 welded to the fitter.

#### Access-mechanism

A die cast A360 aluminum technical ring with latch, hinge and a cast in decorative skirt. The mechanism shall offer tool free access to the inside of the luminaire. An embedded memory retentive gasket shall ensure weatherproofing.

#### Light engine

**LED engine composed of 5 main components:** Heat Sink / Lens / LED lamp / Driver / Optical System. Electrical components are RoHS compliant.

#### LED engine

Composed of high-performance white LEDs. Color temperature as per ANSI/NEMA bin Neutral White, 4000 Kelvin nominal (3985K +/- 275K or 3710K to 4260K) or Warm white, 3000 Kelvin nominal (3045K +/- 175K or 2870K to 3220K), CRI 70 Min. 75 Typical.

#### Lens

**LExF / LEs:** Made of soda lime tempered glass lens, mechanically assembled and sealed onto the lower part of the heat sink.

**LExA (Globe):** Made of one-piece seamless injection-molded impact-resistant (DR) acrylic having an inner prismatic surface. The globe is mechanically assembled and sealed onto the lower part of the heat sink.

#### Heat sink

Made of cast aluminum optimizing the LEDs efficiency and life. Product does not use any cooling device with moving parts (only passive cooling device).

#### Optical system

Composed of high performance optical grade PMMA acrylic refractor lenses to achieve desired distribution optimized to get maximum spacing, target lumens and a superior lighting uniformity. Optical system is rated IP66. Performance shall be tested per LM 63, LM 79 and TM 15 (IESNA) certifying its photometric performance. Street side indicated.



**Prismatic globe:** IP66 rated optical system, composed of individual pre-oriented lens to achieve desired distribution, assembled with globe having an inner prismatic surface permanently sealed onto the lower part of the heat sink.

**LE2A** - Type II (ASYM) with globe (ACDR)

**LE3A** - Type III (ASYM) with globe (ACDR)

**LE4A** - Type IV (ASYM) with globe (ACDR)



**Sag lens:** IP66 rated optical system, composed of individual pre-oriented lens to achieve desired distribution, assembled with a tempered-glass sag lens permanently sealed onto the lower part of the heat sink.

**LE2S** - Type II (ASYM) with sag glass lens

**LE3S** - Type III (ASYM) with sag glass lens

**LE4S** - Type IV (ASYM) with sag glass lens

**LE5S** - Type V (SYMM) with sag glass lens



**Flat lens:** IP66 rated optical system, composed of individual pre-oriented lens to achieve desired distribution, assembled with a tempered-glass flat lens permanently sealed onto the lower part of the heat sink.

**LE2F** - Type II (ASYM) with flat glass lens

**LE3F** - Type III (ASYM) with flat glass lens

**LE4F** - Type IV (ASYM) with flat glass lens

**LE5F** - Type V (SYMM) with flat glass lens

#### Driver

Driver comes standard with dimming compatible 0-10V. High power factor of 90% minimum. Electronic driver, operating range 50/60 Hz. Auto adjusting universal voltage input from 120 to 277 or 347 to 480 VAC rated for both application line to line or line to neutral, Class I, THD of 20% max. Maximum ambient operating temperature from 40°F (40°C) to 130°F (55°C).

Certified in compliance to UL1310 cULus requirement. Dry and damp location. Assembled on a unitized removable tray with Tyco quick disconnect plug resisting to 221°F (105°C). The current supplying the LEDs will be reduced by the driver if the driver experiences internal overheating as a protection to the LEDs and the electrical components. Output is protected from short circuits, voltage overload and current overload. Automatic recovery after correction. Standard built in driver surge protection of 2.5kV (min).

#### Surge protector

Surge protector tested in accordance with ANSI/IEEE C62.45 per ANSI/IEEE C62.41.2 Scenario I Category C High Exposure 10kV/10kA waveforms for Line Ground, Line Neutral and Neutral Ground, and in accordance with U.S. DOE (Department of Energy) MSSLC (Municipal Solid State Street Lighting Consortium) model specification for LED roadway luminaires electrical immunity requirements for High Test Level 10kV / 10kA. SP2 20kV/20kA optional.

#### Driver options

**DMG:** Dimmable driver 0-10V.

**SRD:** Sensor Ready Driver including SR communication (used for dimming and other functionalities), 24V auxiliary supply and a logical signal input (LSI) connected to the top NEMA twist lock receptacle.

**SRD1:** Sensor Ready Driver including SR communication (used for dimming and other functionalities) but with 24V auxiliary supply and a logical signal input (LSI) not connected to the top NEMA twist lock.

### LED Performance

Predicted lumen depreciation data <sup>1</sup>				
Ambient Temperature (°C)	Driver mA	Calculated L <sub>70</sub> hours <sup>1,2</sup>	L <sub>70</sub> per TM-21 <sup>3</sup>	Lumen Maintenance % @ 60,000 hours
25°C	700 mA	>100,000	>60,000	86%

1. Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions.

2. L<sub>70</sub> is the predicted time when LED performance depreciates to 70% of initial lumen output.

3. Calculated per IESNA TM21-11. Published L<sub>70</sub> hours limited to 6 times actual LED test hours.















# AT10/AT20/AT30/AT40


# Ancestra LED Post Top

## Urban Luminaire


### Specifications (continued)

#### Luminaire options


<b>CPT</b>	Copper cupola
<b>CPTC</b>	Varnished copper cupola
<b>DA</b>	Decorative arches
<b>DC</b>	Decorative cap
	<b>FN1</b> Decorative finial
	<b>FN2</b> Decorative finial
	<b>FN3</b> Decorative finial
	<b>FN5</b> Decorative finial
	<b>FN6</b> Decorative finial
	<b>FN8</b> Decorative finial
	<b>FN9</b> Decorative finial
	<b>FN10</b> Decorative finial
<b>FNC</b>	Decorative finial painted copper
	<b>HS</b> House side shield
	<b>PH8</b> Photoelectric cell, twist-lock type. Allows 90° rotation
	<b>PH9</b> Shorting cap, twist-lock type
	<b>PHXL</b> Extended life Photoelectric cell, twist-lock type Allows 90° rotation
	<b>RC</b> Receptacle 3-pins
	<b>RCD7</b> Receptacle 7-pins
<b>SP2</b>	20kV/10kA integral surge protector (optional)
<b>WC</b>	Without Cupola



**TN2.875C**  
2-7/8" dia.  
tenon adaptor



**TN3**  
3" dia.  
tenon adaptor



**TN3.5**  
3-1/2" dia.  
tenon adaptor

#### Fitter

Cast 356 aluminum c/w 4 set screws 3/8 16 UNC. This fitter holds 2 arms made of cast aluminum 356 mechanically assembled. Slip fits on a 4" (102mm) outside diameter X 4" (102mm) long tenon.

#### Finish

In accordance with the AAMA 2603 standard. Application of polyester powder coat paint (4 mils/100 microns) with +/- 1 mils/24 microns of tolerance. The Thermosetting resins provides a discoloration resistant finish in accordance with the ASTM D2244 standard, as well as luster retention in keeping with the ASTM D523 standard and humidity proof in accordance with the ASTM D2247 standard. The surface treatment achieves a minimum of 2000 hours for salt spray resistant finish in accordance with testing performed and per ASTM B117 standard.

#### Textured Finish Options:

**BE2TX:** Textured Midnight Blue  
**BE6TX:** Textured Ocean Blue  
**BE8TX:** Textured Royal Blue  
**BG2TX:** Textured Sandstone  
**BKTX:** Textured Black  
**BRTX:** Textured Bronze  
**GN4TX:** Textured Blue Green  
**GN6TX:** Textured Forest Green  
**GN8TX:** Textured Dark Forest Green  
**GNTX:** Textured Green  
**GY3TX:** Textured Medium Grey  
**RD2TX:** Textured Burgundy  
**RD4TX:** Textured Scarlet  
**WHTX:** Textured White

#### Non-Textured Finish Options:

**GR:** Gray Sandtex  
**NP:** Natural Aluminum  
**TG:** Hammer-tone Gold

#### Luminaire useful life

Refer to IES files for energy consumption and delivered lumens for each option. Based on ISTMT in situ thermal testing in accordance with UL1598 and UL8750, using LM-80 data from LED manufacturers and engineering prediction methods, the luminaire useful life is expected to reach 100,000+ hours with >L70 lumen maintenance @ 25°C. Luminaire Useful Life accounts for LED lumen maintenance AND all of these additional factors including: LED life, driver life, PCB substrate, solder joints, on/off cycles, burning hours and corrosion. Entire luminaire is rated for operation in ambient temperature of -40°C / -40°F up to +35°C / +95°F.

#### Hardware

All exposed screws shall be complete with Ceramic primer-seal base coat to reduce seizing of the parts and offers a high resistance to corrosion. All seals and sealing devices are made and/or lined with EPDM and/or silicone and/or rubber.

#### Wiring

Gauge (#14) TEW/AWM 1015 or 1230 wires, 6" (152mm) minimum exceeding from luminaire.

#### Quality control

Manufactured to ISO 9001 2008 standards and ISO 14001-2004 International Quality Standards Certification.

#### LED products (manufacturing standard)

The electronic components sensitive to electrostatic discharge (ESD) such as light emitting diodes (LEDs) are assembled in compliance with IEC61340 5 1 and ANSI/ESD S20.20 standards so as to eliminate ESD events that could decrease the useful life of the product.

#### Quality control

Manufactured to ISO 9001 2015 standards and ISO 14001-2015 International Quality Standards Certification.

#### Certifications and Compliance

cULus Listed for Canada and USA.  
Luminaires are DesignLights Consortium qualified.

# AT10/AT20/AT30/AT40 Ancestra LED Post Top Urban Luminaire

## Poles

