

GreenUp Magnetic Flex

ST298Z 附件 / Accessory

Mounting instructions/安裝說明書

Max.
40℃
Min.
-20℃

Ta
25℃

Product Type 型號描述	Mounting Method 安裝方式	Color 顏色	Voltage 電壓	Power 功率	Weight(kg) 重量
ST298Z Tracker 1M TW	Magnetic track installation 磁吸安裝系統	Black 砂黑	48V	/	1.41
ST298Z Tracker 2M TW					2.82
ST298Z connector I Accessory TW					0.029
ST298Z connector L Accessory TW					0.07
ST298Z connector Horizontal Accessory					0.115
ST298Z connector Vertical Accessory					0.085
ST298Z In Driver 150W 48V 220-240V TW				150W	0.41

Dimension產品尺寸

Product Type/型號	L(cm)	W(cm)	H(cm)
ST298Z Tracker 1M TW	100	3.05	5.3
ST298Z Tracker 2M TW	200	3.05	5.3

Dimension產品尺寸

Product Type/型號	L(cm)	W(cm)	H(cm)
ST298Z connector Horizontal Accessory	8.6	8.6	5.3
ST298Z connector Vertical Accessory	8.6	3.1	8.6

Horizontal Accessory
水平轉角

Vertical Accessory
垂直轉角

Dimension產品尺寸

Product Type/型號	L(cm)	W(cm)	H(cm)
ST298Z connector I Accessory TW	14.3	1.9	1.8

Dimension產品尺寸

Product Type/型號	L(cm)	W(cm)	H(cm)
ST298Z In Driver 150W 48V 220-240V TW	30.8	2.26	4.7

委製/進口商：台灣昕諾飛股份有限公司
地址：台北市南港區園區街3-1號15樓之1
服務電話：0800-808268
原產地：荷蘭昕諾飛授權於中國製造

PHILIPS

Philips and the Philips shield emblem are registered trademarks of Koninklijke Philips N.V.

Installation according to the actual board
thickness selection installation card slot and
installation direction
安裝時根據實際木板根厚度選擇安裝卡槽位
及安裝方向

Installation mode one
安裝模式一
Upper and lower board locking mounting plate
(board thickness not more than 12mm)
上下層木板鎖緊安裝片(木板厚度不大於12mm)
(The short side of the mounting piece is facing
upwards, and the fixing slot is clamped into the
top slot)
(安裝片短邊朝上，固定槽卡入最頂部卡槽)

Installation mode two
安裝模式二
Straight board
直接固定木板
(The short side of the mounting piece is facing
upwards, and the fixing slot is clamped into the
top slot)
(安裝片短邊朝上，固定槽卡入最頂部卡槽)

2


3

Stitching way
拼接方式

Grooves in the ceiling have a width of 36mm
在天花板上開寬度為36mm的槽位

4.1a


Embedded power connection mode
嵌裝電源 連線方式

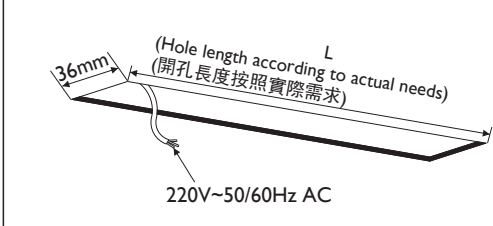

36mm
(Hole length according to actual needs)
L
(開孔長度按照實際需求)
220V~50/60Hz AC

4.1b

48V power connection diagram
48V電源接電示意圖

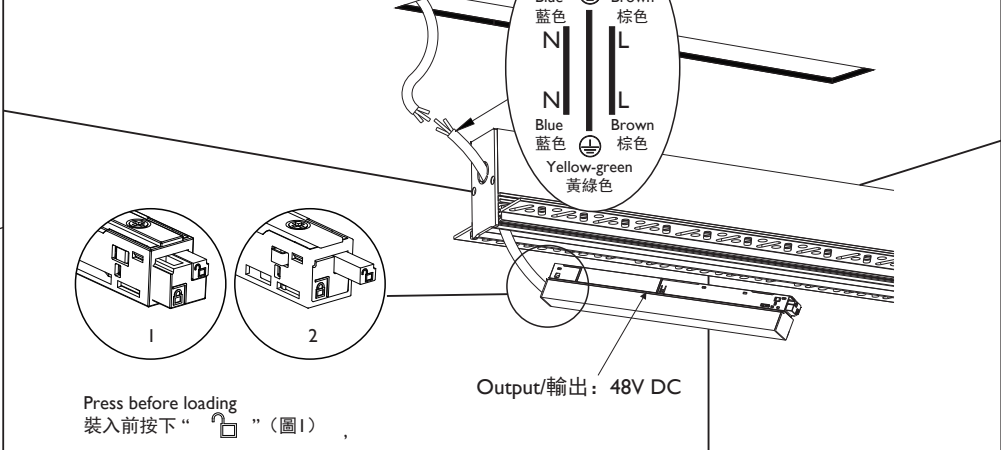


220V
Yellow-green 黃綠色
Blue 藍色
Brown 棕色
N
L
Blue 藍色
Brown 棕色
Yellow-green 黃綠色
Output/輸出: 48V DC

Press before loading
裝入前按下 “ ” (圖1)
Press after loading
裝入後按下 “ ” (圖2)


5

Mounting track rail
安裝軌道

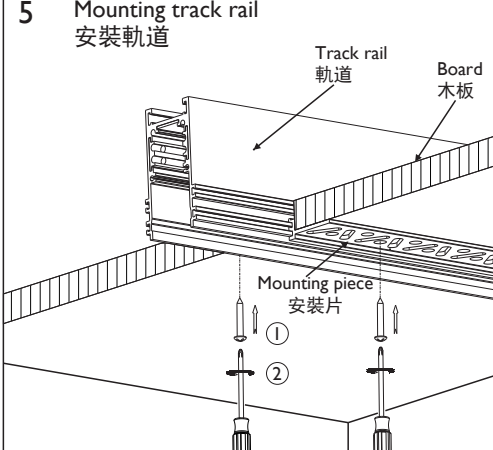


Track rail 軌道
Board 木板
Mounting piece 安裝片
①
②

6

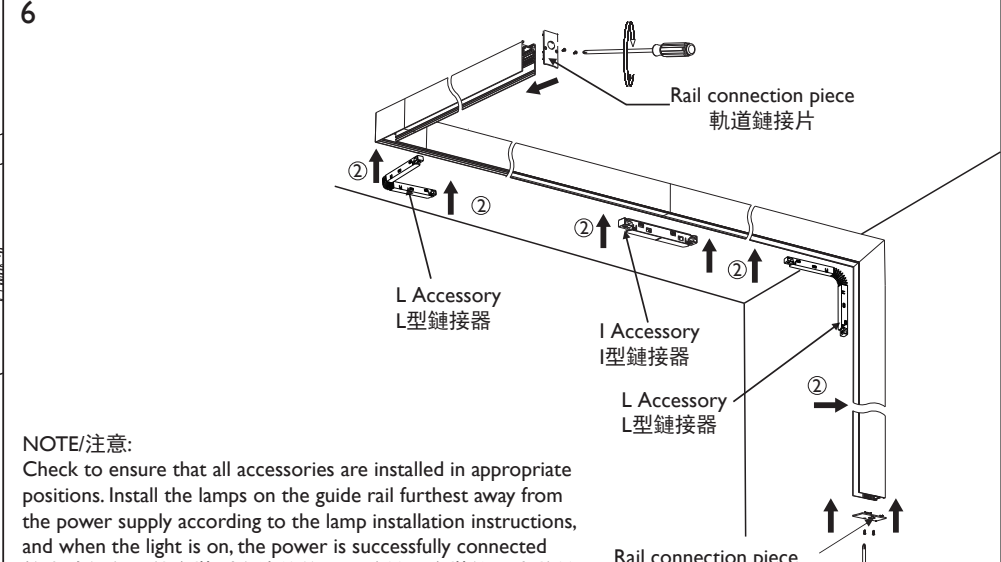

Rail connection piece 軌道鏈接片
L Accessory L型鏈接器
I Accessory I型鏈接器
L Accessory L型鏈接器
Rail connection piece 軌道鏈接片
①
②


7

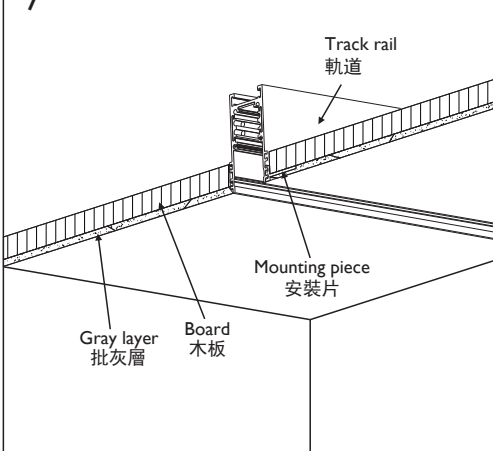

Track rail 軌道
Mounting piece 安裝片
Gray layer 批灰層
Board 木板

8

Lamp installation
燈具安裝

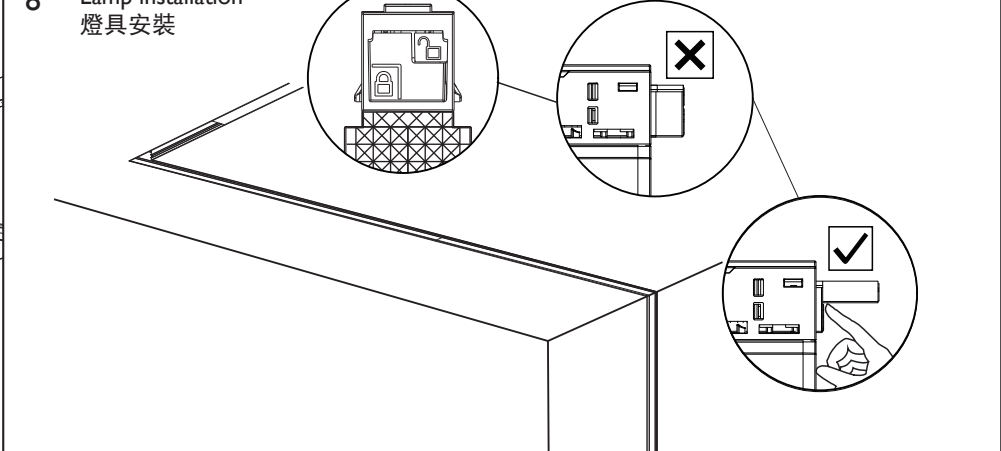

NOTE/注意:
All styles of lamps are installed in the same way
所有款式的燈具安裝方式相同

Please read this manual carefully before using the product. Please keep the manual for future reference.

使用本產品前，請先仔細閱讀本手冊。請保留本手冊作為日後參照用。

The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

燈具應由有資格的電工安裝，接線要符合IEE電氣標準或國家標準。

The luminaire is complied to CNS

此燈具是依據CNS標準所製造。

The luminaire shall ,under no circumstance ,be covered with insulation matting or similar material.

燈具不能被隔熱襯墊或類似材料覆蓋。

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacture or his service agent or a similar qualified person in order to avoid a hazard.

如果此燈具外部軟纜或軟線損壞了，該線要由製造商或其服務代理商專門提供的軟纜或軟線更換。

The manufacturer wil not take respansibility caused by improper use or self modifications of the product.

所有不當使用或自行更改產品結構而導致損壞，生產商不負任何責任。

In case of malfunction, please switch off the power and contact your nearest Philips dealer.

如發現異常或操作有任何問題，請務必先切斷電源，然後與飛利浦經銷商聯繫。

Indoor use only.

本燈具僅限室內使用。

Basic insulation has been provided between LV supply and control conductors.

LV電源和控制導體之間是基本絕緣。

Turn off the power supply before checking, installation or moving.

檢查, 安裝或移動燈具之前, 必須切斷電源。

Maintenance 保養方法:

The corrosive atmosphere or hazardous materials such as sulfur, chlorine, phthalate, etc must be avoided during the use and storahe.

燈具避免在腐蝕性環境或者含有有害物質，例如硫化物，鹵化物，聯苯二甲酸酯等環境中存儲和使用。

To ensure optimum performance, please clean the product regularly (recommended twice a year).

Turn off luminaire before cleaning.

為了保持燈具明亮效果，請定期（半年一次）進行清潔。燈具清潔請在切斷電源情況下進行。

Do not use chemical solvents to clean the luminaire, it might damage the surface.

請不要用香蕉水等揮發物質擦拭燈具表面，請不要對燈具噴灑任何化學藥劑，否則燈具可能會變色或損壞。

Warning: The light source and parts of this lamp are not replaceable. When the light source and parts the end of their life, the whole lamp should be replaced.

警告：此燈具的光源和零部件是不可替換的；當光源和零部件到其壽終時，應替換整個燈具！

產品中有害物質的名稱及含量						
部件名稱	有害物質					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr(VI))	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
LED燈板/光源	○	○	○	○	○	○
驅動器 (板), 銅製及電子零部件	×	○	○	○	○	○
透鏡光學部件	○	○	○	○	○	○
外殼及其他零部件	○	○	○	○	○	○

本表格依據SJ/T 11364的規定編制

○ : 表示該有害物質在該部件所有均質材料中的含量均在GB/T 26572規定的限量要求以下。

× : 表示該有害物質至少在該部件的某一均質材料中的含量超过GB/T 26572規定的限量要求。