


AS/NZS
60598

IP20


 $t_a 25^{\circ}\text{C}$ 

Product Type	Dimension (mm)	CCT (K)	Lumen Output (lm)	Power (W)	Voltage	Frequency	kg
BN126C LED22S/840 PSU L600	600x65x65	4000K	2200	21W	220-240V~	50/60Hz	0.85
BN126C LED22S/865 PSU L600	600x65x65	6500K	2200	21W			0.85
BN126C LED41S/840 PSU L1200	1135x65x65	4000K	4100	38W			1.45
BN126C LED41S/865 PSU L1200	1135x65x65	6500K	4100	38W			1.45
BN126C LED60S/840 PSU L1500	1450x65x65	4000K	6000	56W			1.73
BN126C LED60S/865 PSU L1500	1450x65x65	6500K	6000	56W			1.73


1. Luminaire dimension Unit: mm

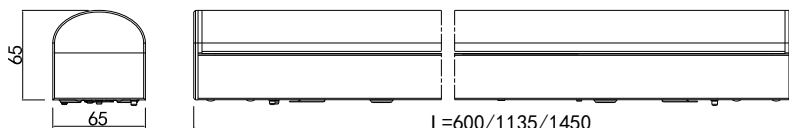


2. Supply Cord

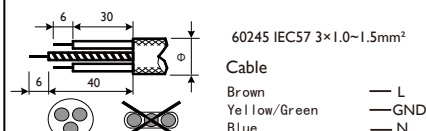

A (L600: A/B/C: Mounting distance)

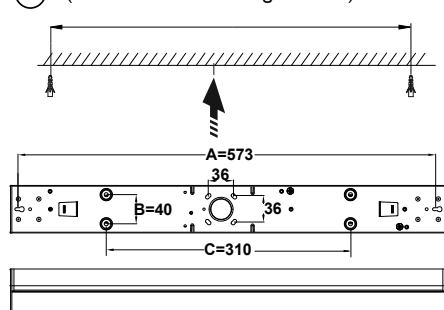
B (L1135: A/B: Mounting distance)
(L1450: A/B: Mounting distance)

Unit: mm

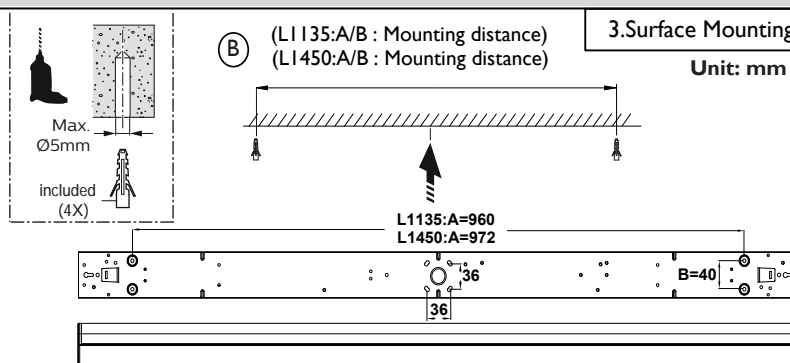


3. Surface Mounting


4. Open the lamp, remove the pendant rope and grounding wire from the housing and take out the accessory bag

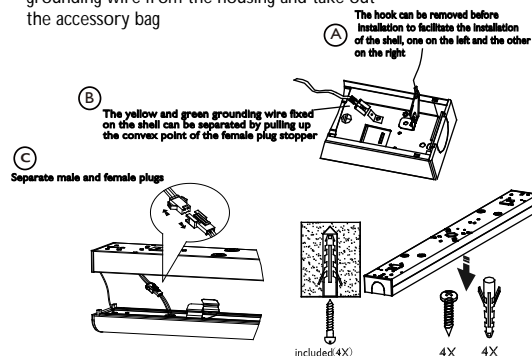


5. Power supply Connection



6. Install grounding wire and anti-pendant hook

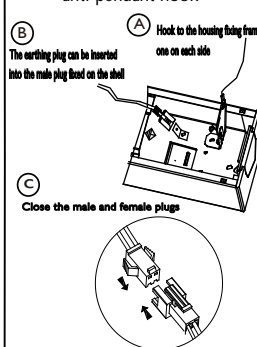

7. Close the luminaire

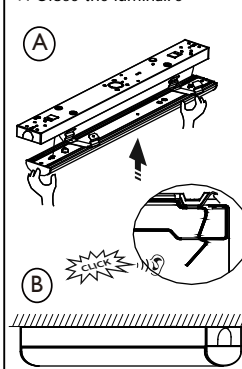

Please read this manual carefully before using the product.

- For indoor use only.
- Do not switch on before complete installation.
- The luminaire must be installed by a licensed electrician and wired in accordance with Australian wiring rules.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- The luminaire is complied with AS/NZS 60598.
- Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc., are present.



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.