

BRP591/592/593/594/595

Mounting instruction/ 安装说明

4441 702 64741



GB
7000

IP66

IK08



Class I



RoHS




220-240V
50/60Hz

Type	LEDs	Power (W)	Weight (kg)	L*W*H (mm)	Wind force area (m²)	CCT (K)	Type	LEDs	Power (W)	Weight (kg)	L*W*H (mm)	Wind force area (m²)	CCT (K)
型号	颗粒	功率	重量	长*宽*高	风压面积	色温	型号	颗粒	功率	重量	长*宽*高	风压面积	色温
BRP591 42LED265 (WW,R)	42	70					BRP595 99LED265 (WW)	99	160				
BRP591 42LED305 (WW,R)	42	80	≈3.3	423*189*95	0.08		BRP595 99LED280 (WW)	99	170				
BRP591 42LED340 (WW,R)	42	90					BRP595 99LED300 (WW)	99	180	≈6.8	726*244*95		
BRP591 42LED315 WW P7	42	80	≈3.4	423*189*131			BRP595 99LED315 (WW)	99	190				
BRP592 60LED270 (WW,R)	60	100					BRP595 99LED330 (722,727,WW)	99	200				
BRP592 60LED300 (WW,R)	60	110	≈3.5	493*189*95	0.09		BRP595 99LED330 P7	99	200	≈7.1	726*244*139		
BRP592 60LED330 (WW,R)	60	120					BRP595 117LED300 (WW)	117	210				
BRP592 60LED350 (722,727,WW,R)	60	130					BRP595 117LED310 (WW)	117	220	≈6.8	726*244*95		
BRP592 60LED330 WW P7	60	120	≈3.6	493*189*131			BRP595 117LED325 (WW)	117	230				
BRP593 42LED270 (WW,R)	42	70					BRP595 117LED340 (WW)	117	240				
BRP593 42LED310 (WW,R)	42	80	≈4.0	578*189*95			BRP595 117LED350 (722,727,WW)	117	250	≈7.1	726*244*139		
BRP593 42LED345 (722,727,WW,R)	42	90					BRP595 117LED350 P7	117	250				
BRP593 42LED350 P7	42	90	≈4.2	578*189*129			BRP595 144LED300 (WW)	144	260				
BRP593 60LED275 (WW,R)	60	100					BRP595 144LED310 (WW)	144	270				
BRP593 60LED305 (WW,R)	60	110	≈4.0	578*189*95	0.11		BRP595 144LED315 (WW)	144	270	≈6.8	726*244*95		
BRP593 60LED330 (722,727,WW,R)	60	120					BRP595 144LED320 (WW)	144	280				
BRP593 60LED350 P7	60	130	≈4.2	578*189*129			BRP595 144LED325 (WW)	144	280				
BRP593 72LED300 (WW,R)	72	130					BRP595 144LED330 (WW)	144	290				
BRP593 72LED320 (WW,R)	72	140	≈4.0	578*189*95			BRP595 144LED335 (WW)	144	290				
BRP593 72LED345 (WW,R)	72	150					BRP595 144LED340 (WW)	144	300				
BRP593 72LED350 P7	72	150	≈4.2	578*189*129			BRP595 144LED345 (WW)	144	300				
BRP594 96LED275 (WW)	96	160					BRP595 144LED350 (722,727,WW)	144	300				
BRP594 96LED295 (WW)	96	170					BRP595 144LED340 P7	144	300	≈7.1	726*244*139		
BRP594 96LED310 (WW)	96	180					BRP595 144LED345 P7	144	300				
BRP594 96LED330 (WW)	96	190	≈4.6	709*189*95	0.13		BRP595 144LED350 P7	144	300				
BRP594 96LED345 (WW)	96	200					BRP595 144LED350 WW P7	144	300				
BRP594 96LED365 (WW)	96	210					BRP595 144LED40 OS	144	35				
BRP594 96LED380 (WW)	96	220					BRP595 144LED50 OS	144	43				
BRP594 96LED395 (722,727,WW)	96	230					BRP595 144LED60 OS	144	51				
BRP594 114LED310 (WW)	114	210					BRP595 144LED70 OS	144	59				
BRP594 114LED325 (WW)	114	220					BRP595 144LED78 OS	144	65				
BRP594 114LED335 (WW)	114	230					BRP595 144LED80 OS	144	68	≈6.3	726*244*95	0.18	4000
BRP594 114LED350 (WW)	114	250					BRP595 144LED90 OS	144	76				
BRP594 96LED350 WW P7	96	200					BRP595 144LED100 OS	144	84				
BRP594 96LED395 P7	96	230	≈4.8	709*189*129			BRP595 144LED110 OS	144	92				
BRP594 114LED355 P7	114	250					BRP595 144LED120 OS	144	100				

产品尺寸 Product Size

标准版 Standard version

控制版 System ready

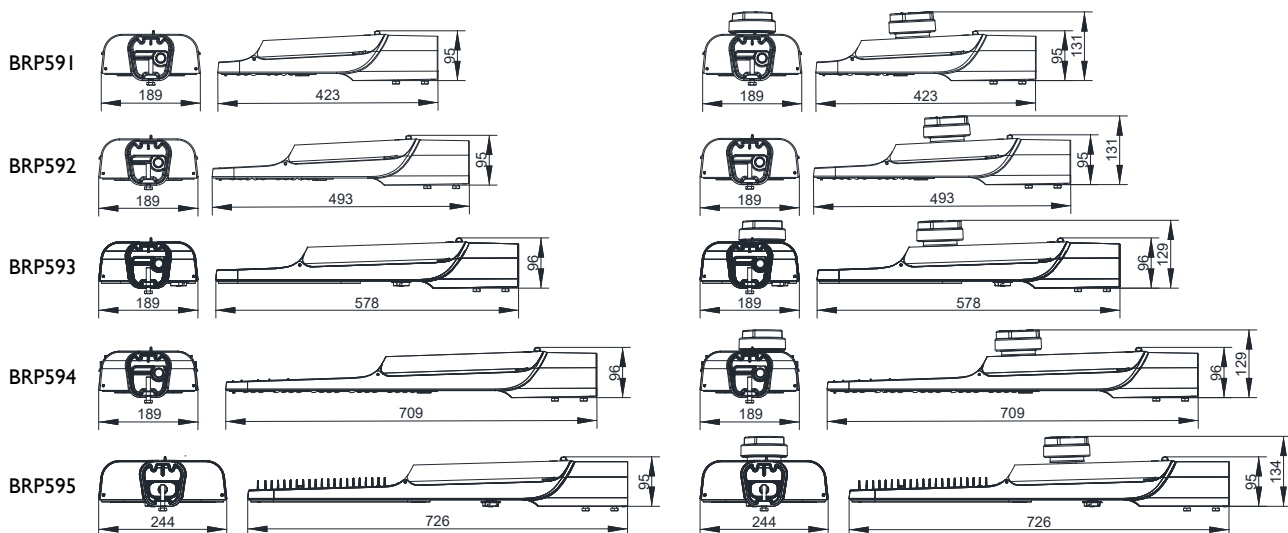

单位: 毫米

Unit: mm

Signify (China) Investment Co., Ltd.
Building No. 9, Lane 888 Tianlin Road,
Minhang District, Shanghai, China
Postalcode: 200233
斯诺飞 (中国) 投资有限公司
中国上海市闵行区田林路888弄9号楼
邮编: 200233


内容如有变更, 恕不另行通知

PHILIPS


Philips and the Philips shield emblem are registered trademarks of Koninklijke Philips N.V.

1. 须有资质的电工安装。
Shall be fixed by a qualified electrician.
2. 须顺时针拧到底, 旋转约10°。
Shall be fixed clockwise until the end.
Rotation angle is about 10°.
3. 此灯具提供的短路帽使用寿命3年。
Shorting cap provided with the luminaire is rated for 3 years service life.
4. 短路帽须在3年内更换为预定设备或
Shorting cap should be replaced with intended replaced within 3 years.


注意：须使用Signify推荐的短路帽，确保IP66。
Note: Must use Signify suggested short cap to ensure IP66

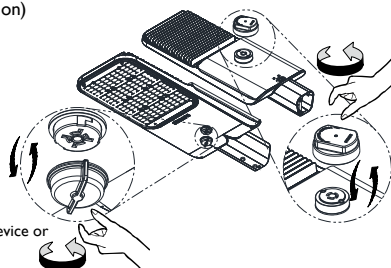

1.用手向下按压盖子,按箭头方向拨动按钮。
Press the cover by hand and slide from lock to unlock.

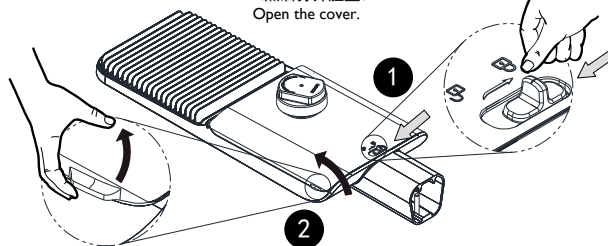

PG M20/M22

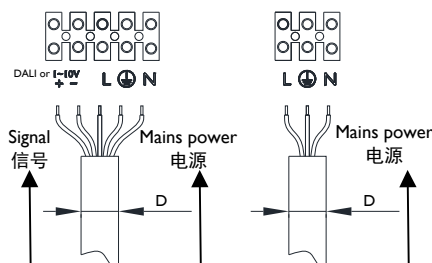

60245 IEC57
5×1.0mm²

60245 IEC57
3×1.0mm²

线缆直径 Cable diameter (D):
PG M20: $\phi 6\sim 12\text{mm}$;
PG M22: $\phi 8\sim 14\text{mm}$

扭矩: 10Nm
Torque: 10Nm



将电源线防水接头旋开螺帽,去掉前端密封堵头,保留橡胶衬套。插入线缆,确保橡胶衬套不掉落,然后旋紧螺帽。

Loosen the cap of cable gland, then remove the front plug, should keep the rubber lining in. Insert the cable in and ensure the inner sealing tube not fall off, then fasten the cap.

Notice:
Correct connection for polarities.
注意:正确的极性连接。

2-M8 17N.m

灯杆的角度: 0-15度
 灯具安装杆径: 42-60mm
 The angle of pole: 0-15 degree
 Pole diameter: 42-60mm

 不要丢弃 Don't throw away



警告，触电危险



所有在灯具中使用的材料，必须符合遵守表中的要求。

内容如有变更,恕不另行通知

产品中有害物质的名称及含量						
部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
LED灯板/光源	○	○	○	○	○	○
驱动器(板), 铜制及电子零部件	×	○	○	○	○	○
透镜光学部件	○	○	○	○	○	○
外壳及其它零部件	○	○	○	○	○	○

本表格依据SJ/T 11364的规定编制
 ○表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。
 ×表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。

Available to: 3M