



Specification Sheet

KT100 RF DALI Connector Kit with SC100 IA

- The RF-DALI connector is designed to connect luminaires to the Interact wireless indoor smart lighting system.
- Switch ON/OFF and control with DALI the connected luminaire(s).
- Reports total energy usage of the connected luminaire(s) in the Interact Pro dashboard.
- The maximum load of the connector is 400 VA.

RF-DALI connector

Features

- Connects existing DALI driver(s) to become part of wireless connected lighting systems
- Connect to regular mains switchable luminaires with standard ON/OFF behavior
- Can be programmed with the use of the Interact Pro app or dashboard.
- The device is Interact ready and can be easily linked to a wireless Interact lighting system.

Benefits

- Improve overall project flexibility and efficiency by controlling luminaire(s) using mains and DALI.
- Energy reporting for the connected luminaire(s) capable.
- Minimal startup and configuration expertise savings on labor time and effort.
- Deep energy savings and code compliance strategies.


Product use

- 929003423806 Xitanium SR Bridge independent
- 913701069303 SC100B/02 SR Transceiver
- 913713620803 SA0600 Sensor mounting box
- 442294852171/ 2-wire cable (1 m, 0.75 mm²)
- 442294257982

Applications



- Conference rooms
- Individual offices
- Open offices
- Classrooms
- Storage and break areas
- Restrooms
- Lobbies
- Stairways
- Industrial warehouses
- Indoor parkings
- Factories etc.

Dimensional drawings

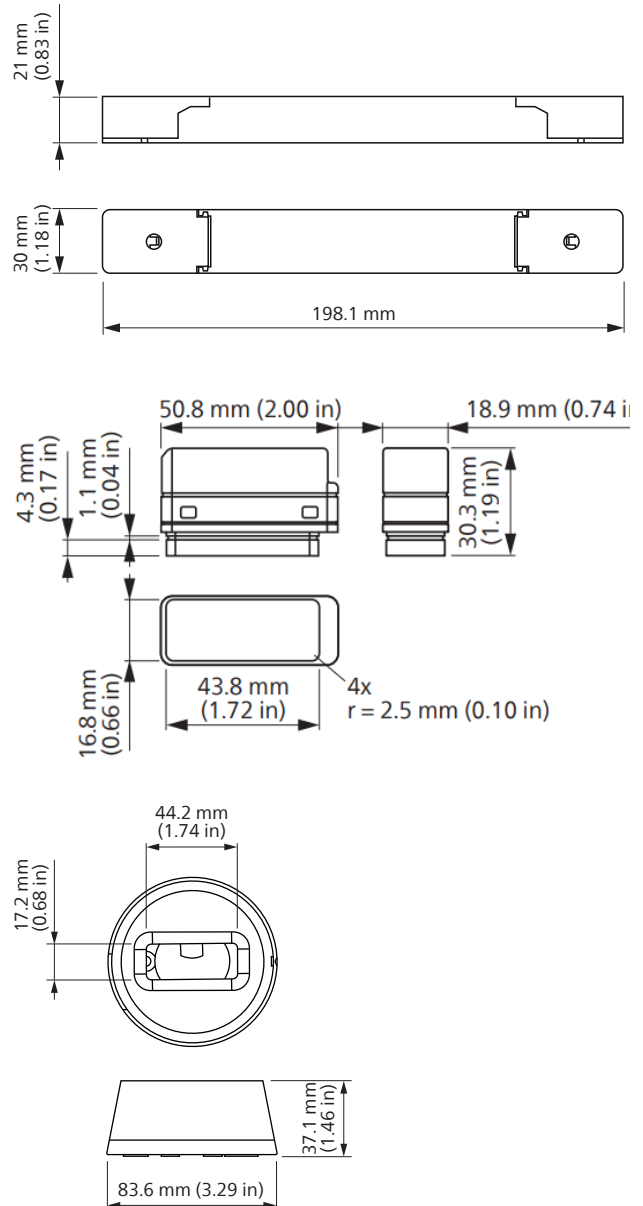

RF-DALI connector

Wiring

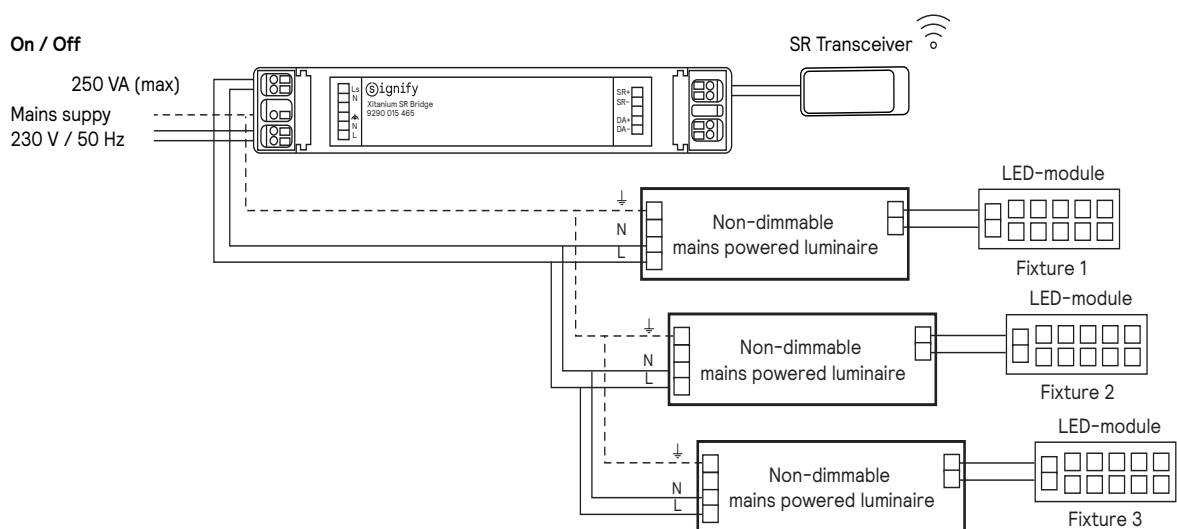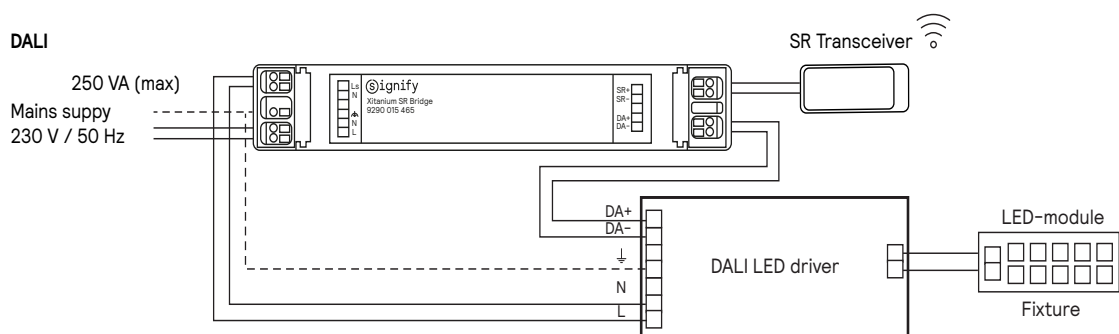

Specifications ^{1, 2}

Mechanical

Sensor box	Polycarbonate
------------	---------------

Electrical

Input line voltage	220 to 240 Vac \pm 10%
Input line current	2.0 A (max. load at 120 Vac)
Line frequency	50/60 Hz
Rated input power	402 W
Power factor	\geq 0.9
Total harmonic distortion	<20%
Standby power	<0.5 W

Zigbee and Bluetooth Low Energy (BLE)

Communication distance	Zigbee: 25 m (line of sight, package error rate <1%) BLE: 15 m (line of sight, package error rate <10%)
------------------------	--

*The RF-distance at luminaire level is different. It depends on design-in and results of TRP-loss tests.

Environment

Temperature (operating)	-40 to +60 °C (-40 to 140 °F)
Temperature (storage and transport)	-40 to +85 °C (-40 to +185 °F)
Relative humidity (operating)	10% to 90% (non-condensing)
Relative humidity (storage and transport)	5% to 95% (non-condensing)

Approbations

Agency approbations	CE, UKCA
Ingress protection	IP20



¹ Shown are the most relevant specifications of the combined components of the RF-DALI connector.

² See the specification sheets of the respective components for more information.

Ordering data

Type	Description
9137 010 74803	KT100 RF DALI Connector Kit w SC100 IA

© 2020–2025 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

All trademarks are owned by Signify Holding or their respective owners.

