



# Maxos LED Performer

## 4MX900 491 LED40S/840 PSU MB SI

Maxos LED Performer, Trunking light panel, 25.2 W, L1479 mm, 4000 lm, 4000 K, Medium beam, Clear, Silver, IP40

Customers want to save energy and reduce cost compared to what they are used to with conventional lighting. At the same time, excellent lighting conditions are needed: in industrial environments, to guarantee safety and productivity; and in retail environments, to make the merchandise stand out and attract shoppers. Maxos LED Performer is an extremely flexible solution that delivers low energy consumption and excellent beam shaping at an attractive investment level.

### Product data

General Information	
Lamp family code	LED40S [LED module, system flux 4000 lm]
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Lighting Technology	LED
Value ladder	Performance
Serviceability class	Class B, luminaire is equipped with some serviceable parts (when applicable): driver, control units, surge protection device, front cover and mechanical parts
Warranty period	5 years
Sustainability rating	Unclassified

Light Technical	
Luminous Flux	4,000 lm
Saturated Red (R9)	<50
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	158 lm/W
Color rendering index (CRI)	>80
Number of light sources	1
Beam angle of light source	120 degree(s)
Light source color	840 neutral white
Optic type	Medium beam
Luminaire light beam spread	70°
Unified glare rating CEN	Not applicable

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Initial CLO power consumption	- W

# Maxos LED Performer

Average CLO power consumption	- W
Inrush current	17.8 A
Inrush time	0.282 ms
Power Consumption	25.2 W
Power Factor (Fraction)	0.9
Connection	Connection unit 5-pole
Cable	-
Number of products on MCB of 16 A type B	24
Suitable for random switching	Not applicable
Protection class IEC	Safety class I
Total harmonic distortion	20 %

## Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable

## Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Steel
Housing Color	Silver
Optical cover finish	Clear
Overall length	1,479 mm
Overall width	87 mm
Overall height	82 mm
Dimensions (Height x Width x Depth)	82 x 87 x 1479 mm
Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Net Weight (Piece)	2.500 kg

## Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	-
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C

Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
Ambient temperature range	-20 to +40 °C

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

## Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 35000 h	-
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L90
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 75000 h	-
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L80

## Product Data


Order product name	4MX900 491 LED40S/840 PSU MB SI
Full product name	4MX900 491 LED40S/840 PSU MB SI
Full product code	403073266485699
Order code	910629141326
Material Nr. (12NC)	910629141326
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	4030732664856
Numerator - Packs per outer box	2
EAN/UPC - Case	4030732262670
Product family code	4MX900 [Maxos LED Performer]

# Maxos LED Performer

## Dimensional drawing

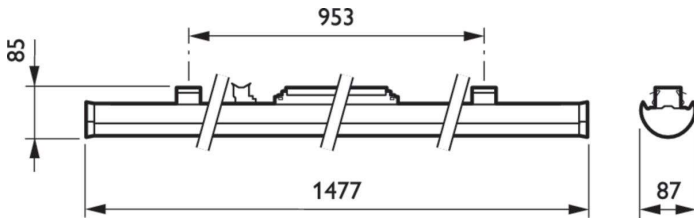

## Photometric data



Polar Normal (separate) - 4MX9001 - 910629141326

