



# DigiStreet

## BGP761 LED59-/830 II DN11 DGR D11 62

DigiStreet, Road & street light, 41 W, 5400 lm, 3000 K, CRI80, Distribution narrow 11, Interact Ready, Safety class II, IP66

Road & street light, Aluminum die cast, Dark gray, Spigot for diameter 62 mm, Power supply unit regulating external, 5400 lm, 41 W, 132 lm/W, 3000 K, (0.43. 0.40) SDCM <5, CRI80, Distribution narrow 11, IP66 | Dust penetration-protected, jet-proof, IK09 | 10 J, Safety class II, Surge protection level until 6 kV differential mode and 8 kV common mode, Screw connector

### Product data

General Information		Luminaire light beam spread	
Lamp family code	LED59 [LED module 5900 lm]		53° x 71°
Light source replaceable	Yes	Optic type outdoor	Distribution narrow 11
Number of gear units	1 unit	Effective projected area	0.0666 m <sup>2</sup>
Driver included	Yes	Operating and Electrical	
Light source engine type	LED	Input Voltage	220-240 V
Service tag	Yes	Line Frequency	50 to 60 Hz
Lighting Technology	LED	Inrush current	46 A
Value ladder	Specification	Inrush time	0.25 ms
Warranty period	5 years	Power Consumption	41 W
		Power Factor (Fraction)	0.97
		Connection	Screw connector
		Cable	-
		Number of products on MCB of 16 A type B	11
		Protection class IEC	Safety class II
		Surge Protection (Common/Differential)	Surge protection level until 6 kV differential mode and 8 kV common mode

Light Technical	
Upward light output ratio	0
Luminous Flux	5,400 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	132 lm/W
Color rendering index (CRI)	80
Light source color	830 warm white

Controls and Dimming	
Dimmable	Yes
Driver/power unit/transformer	Power supply unit regulating external
Control interface	-
Constant light output	No
Maximum dim level	Not applicable
Connectivity	Interact Ready

Mechanical and Housing	
Housing Material	Aluminum die cast
Reflector material	Polycarbonate
Optic material	Acrylate
Optical cover material	Glass
Fixation material	Stainless steel
Housing Color	Dark gray
Mounting device	Spigot for diameter 62 mm
Optical cover shape	Flat
Optical cover finish	Clear
Overall length	860 mm
Overall width	236 mm
Overall height	107 mm
Dimensions (Height x Width x Depth)	107 x 236 x 860 mm
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK09 [10 J]
Standard tilt angle posttop	0°
Standard tilt angle side entry	0°
Optical cover type	Flat glass
Net Weight (Piece)	7.610 kg

Approval and Application	
Flammability mark	-
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Remarks	* At extreme ambient temperatures the luminaire might automatically dim down to protect components
Ambient temperature range	-40 to +50 °C


Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-7%
Initial chromaticity	(0.43, 0.40) SDCM <5
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5

Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	5 %
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L99
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L97


Sustainability Data	
Sustainability rating	Signify Circle
Repair class	Repair Class B, the driver and light source of this luminaire can be replaced by a service technician. Parts and documentation are available for an extended period of time.
Embedded carbon (A1-A3)	162 kg CO <sub>2</sub> e
Product non-virgin material ratio	7.03 %
Recyclable content ratio of the finished product	51.4 %
GWP total B6 (kg CO <sub>2</sub> eq) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO <sub>2</sub> eq / kwh)
GWP total B6 (kg CO <sub>2</sub> eq) Functional Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * 1000 (lm) /lumen output (lm) Declared Unit * 35000 (hrs) * Energy mix (kg CO <sub>2</sub> eq / kwh)
Non-virgin material ratio of the packaging	Cardboard > 80% recycled Plastic >35% recycled
Packaging Recyclable content ratio	Cardboard recycling rate > 80% Plastic recycling rate > 40%
Packaging Material	Cardboard Plastic

Product Data	
Order product name	BGP761 LED59-/830 II DN11 DGR D11 62
Full product name	BGP761 LED59-/830 II DN11 DGR D11 62
Full product code	871869637696600
Order code	910925866240
Material Nr. (12NC)	910925866240
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696376966
Numerator - Packs per outer box	1
EAN/UPC - Case	8718696376966
Product family code	BGP761 [DigiStreet Mini]

Dimensional drawing

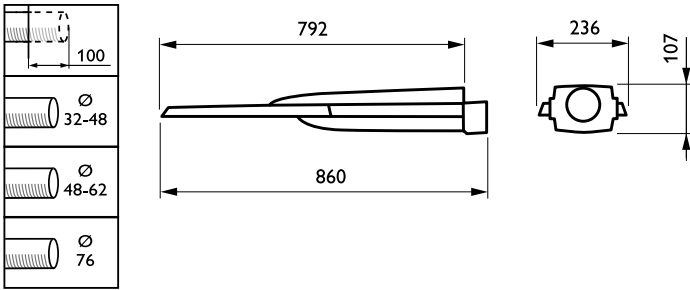

Photometric data



Polar Normal (separate) - BGP761I - 910925866240

