



CoreLine Recessed Spot gen2

RS155B LED9-WB-/830 D68 PSR PI6 ALU

CoreLine Recessed Spot gen2, Fixed, 10.2 W, D68 mm, 1000 lm, 3000 K, Phase-cut dim, Wide beam, Aluminum, IP20/65

CoreLine Recessed Spot gen2, Fixed, D68 mm, Aluminum die-cast, Aluminum, Recessed, Power supply unit regulating external, 1000 lm, 10.2 W, 98 lm/W, 3000 K, (0.43, 0.40) SDCM <5, Wide beam, Polycarbonate, IP20/65 | Finger-protected; Dust penetration-protected, jet-proof, IK03 | 0.3 J, Safety class II, Cable 0.25 m with connector 3-pole, Push-in connector 3-pole

Warnings and Safety

- The luminaire should be installed and disassembled by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements, as per the product mounting instructions.

Product data

General Information		Luminous Efficacy (rated) (Nom)	
Light source replaceable	Yes	Luminous Efficacy (rated) (Nom)	98 lm/W
Number of gear units	1 unit	Color rendering index (CRI)	>80
Driver included	Yes	Beam angle of light source	120 degree(s)
Lighting Technology	LED	Light source color	830 warm white
Value ladder	Performance	Optic type	Wide beam
Warranty period	5 years	Luminaire light beam spread	36°
		Unified glare rating CEN	30
Light Technical		Operating and Electrical	
Luminous Flux	1,000 lm	Input Voltage	220 to 240 V
Saturated Red (R9)	<50	Line Frequency	50 or 60 Hz
Correlated Color Temperature (Nom)	3000 K	Initial CLO power consumption	- W

CoreLine Recessed Spot gen2

Average CLO power consumption	- W
Inrush current	2 A
Inrush time	0.02 ms
Power Consumption	10.2 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 3-pole
Cable	Cable 0.25 m with connector 3-pole
Number of products on MCB of 16 A type B	40
Suitable for random switching	No
Protection class IEC	Safety class II
Total harmonic distortion	35 %

Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit regulating external
Control interface	Phase-cut dim
Constant light output	No
Maximum dim level	10% (depends on dimmer, ELV)

Mechanical and Housing

Housing Material	Aluminum die-cast
Reflector material	-
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Steel
Housing Color	Aluminum
Optical cover finish	-
Overall height	62 mm
Overall diameter	85 mm
Nominal Ceiling cut-out diameter	68 mm
Ingress protection code	IP20/65 [Finger-protected; Dust penetration-protected, jet-proof]
Mech. impact protection code	IK03 [0.3 J]
Mounting	Recessed
Net Weight (Piece)	0.290 kg

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 1 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM) - Flickering value as 1 per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	0 to +35 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM <5
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 35000 h	-
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L70
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 75000 h	-
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	-

Sustainability Data


Sustainability rating	Unclassified
Repair class	Repair Class D, this product is not designed to be repaired.
Embedded carbon (A1-A3)	7.07 kg CO ₂ e
Product non-virgin material ratio	8.6 %
Recyclable content ratio of the finished product	64.3 %
GWP total B6 (kg CO ₂ eq) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO ₂ eq / kWh)
GWP total B6 (kg CO ₂ eq) Functional Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * 1000 (lm) /Lumen output (lm) Declared Unit * 35000 (hrs) * Energy mix (kg CO ₂ eq / kWh)

Product Data


Order product name	RS155B LED9-WB-/830 D68 PSR PI6 ALU
Full product name	RS155B LED9-WB-/830 D68 PSR PI6 ALU
Full product code	871951494101499
Order code	94101499
Material Nr. (12NC)	911401822784
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514941014
Numerator - Packs per outer box	18
EAN/UPC - Case	8719514941403

CoreLine Recessed Spot gen2

Dimensional drawing

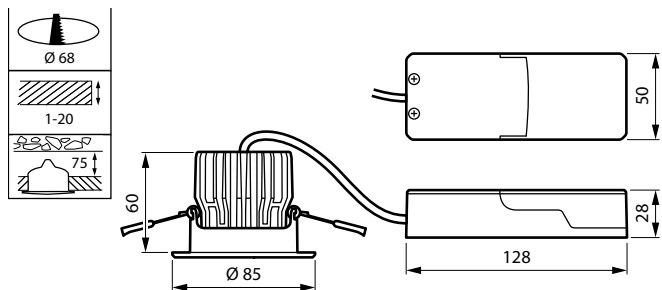

Photometric data



Polar Normal (separate) - 911401822784

