



# CoreLine Batten

## BN126C LED80S/840 PSU L1500

CoreLine Batten, 59 W, L1500 mm, 8000 lm, 4000 K, Opal, IP20, TW1-ready, EL-ready

The CoreLine Batten delivers on the CoreLine promise of innovative, easy-to-use and high-quality luminaires. The efficient design makes installation quick and easy, enabling seamless light-line creation without additional accessories. The CoreLine Batten provides universal light distribution, supporting homogeneous illuminance and visual comfort. Interact-Ready luminaires with integrated wireless communications are also available, for use with Interact gateways, sensors and software.

### Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress and as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips/Signify cannot guarantee safe failure and product warranty will become void

### Product data

General Information	
Light source replaceable	No
Number of gear units	Unit
Driver included	Yes
Service Tag	Yes
Lighting Technology	LED
Value ladder	Performance
Warranty period	5 years

Light Technical	
Luminous Flux	8,000 lm
Saturated Red (R9)	<50
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	136 lm/W
Colour rendering index (CRI)	>80
Light source colour	840 neutral white
Optic type	Beam angle 120°
Luminaire light beam spread	120°

# CoreLine Batten

Unified Glare Rating (CEN)	26
----------------------------	----

## Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 or 60 Hz
Inrush current	15.7 A
Inrush time	0.678 ms
Power Consumption	59 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 3-pole
Cable	-
Number of products on MCB (16 A type B)	8
Suitable for random switching	Not applicable
Protection class IEC	Safety class I
Feed-through wiring	Simple connection and removable cover available for feed-through wiring 1-phase (internal wiring is not included)

## Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No

## Mechanical and Housing

Housing material	Steel
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Housing Colour	White
Optical cover/lens finish	Opal
Overall length	1,450 mm
Overall width	65 mm
Overall height	65 mm
Dimensions (height x width x depth)	65 x 65 x 1450 mm
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK04 [0.5 J standard plus]
Net Weight (Piece)	1.040 kg

## Emergency Operation

Central Emergency	No
Emergency lighting	Emergency lighting ready (through compatible battery kit accessory)

## Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778

Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM)	1
Stroboscopic effect	1.6
Ambient temperature range	-20 to +40 °C

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM≤3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L80

## Sustainability Data


Sustainability rating	Unclassified
Repair class	Repair Class D, this product is not designed to be repaired.
Embedded carbon (A1-A3)	17.1 kg CO <sub>2e</sub>
Product non-virgin material ratio	26.1 %
Recyclable the content ratio of the finished product	67.2 %
GWP total B6 (kg CO <sub>2eq</sub> ) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO <sub>2eq</sub> / kWh)
GWP total B6 (kg CO <sub>2eq</sub> ) Functional Unit	Please calculate using your local energy mix value: POWER DECLARED UNIT (kW) * 1000 (lm) / LUMEN OUTPUT DECLARED UNIT (lm) * 35000 (hrs) * ENERGY MIX (kg CO <sub>2</sub> eq / kWh)

## Product Data


Order product name	BN126C LED80S/840 PSU L1500
Full product name	BN126C LED80S/840 PSU L1500
Full EOC	871951494886099
Order code	911401834784
Material no. (12 NC)	911401834784
Numerator – quantity per pack	1
EAN/UPC – Product/Case	8719514948860
Numerator – packs per outer box	6
EAN/UPC – Case	8719514949089

# CoreLine Batten

## Dimensional drawing

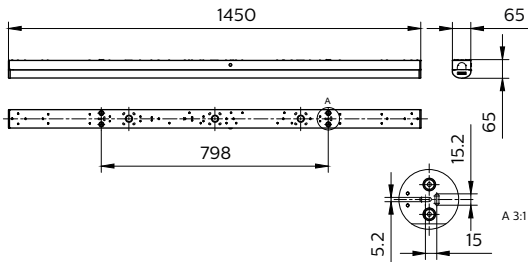

## Photometric data

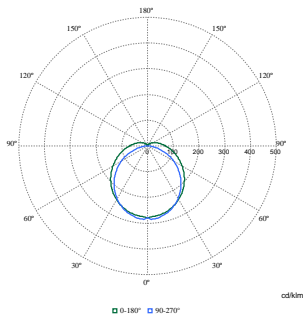

Polar Normal (separate) - 911401834784

