



CoreLine Fastset, surface-mounted

SM155C 37_60S/830_840 PSU TW3 PI5 L1440

CoreLine Fastset, surface-mounted, All-in, 43 W, 36 W, 30 W, 25 W, L1440 mm, 3700 lm, 4250 lm, 5100 lm, 6000 lm, 3000 K, 4000 K

Philips CoreLine FastSet is a 1:1 energy-efficient LED replacement for conventional indoor surface-mounted lights. With identical lumen packages to fluorescent lighting, there's no need to make new lighting calculations for retrofit projects – thanks to the all-in-one design, you can switch between correlated color temperatures (CCT) and lumen package in the same luminaire to suit your exact needs. Installation of these surface-mounted LED lights is fast and flexible too with a choice of simple through-wiring, or cable entry from the side or back of the luminaire. That means CoreLine FastSet indoor surface-mounted lights are easy to mount as a standalone fixture, directly to the surface-mounted or using brackets. You can also create a line of light due to straight end-caps with head to head mounting. It is also easy to connect them to other CoreLine Fastset luminaires to create harmonious lines of light. Should you require it, accessories are also available to adapt the CoreLine fixtures for suspended mounting. As you'd expect from Philips, safety is designed into every CoreLine FastSet luminaire. Not only are the IP44 and IK06 rated to protect against accidental impact, the captive safety pins on the luminaire cover also prevents it from falling. Interact Ready options are available for smart lighting applications. So with CoreLine FastSet surface-mounted LED lights, you have the perfect solution for high circulation areas such as hallways and staircase lighting.

Product data

CoreLine Fastset, surface-mounted

General Information	
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Value ladder	Performance
Serviceability class	Class C, luminaire without serviceable parts, not serviceable
Warranty period	5 years
Sustainability rating	Unclassified

Light Technical	
Luminous Flux	3,700 4,250 5,100 6,000 lm
Saturated Red (R9)	<50
Correlated Color Temperature (Nom)	3000 4000 K
Luminous Efficacy (rated) (Nom)	148 140 lm/W
Color rendering index (CRI)	>80
Light source color	-
Optic type	Opal
Luminaire light beam spread	110°
Unified glare rating CEN	25
All-in Type	All-in, Multi Lumen All-in, Multi Color Temperature

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Inrush current	17 A
Inrush time	0.14 ms
Power Consumption	43 36 30 25 W
Power Factor (Fraction)	0.95
Connection	Push-in connector 5-pole
Cable	-
Number of products on MCB of 16 A type B	18
Suitable for random switching	No
Protection class IEC	Safety class I
Feed-through wiring	Feed-through wiring 3-phase
Total harmonic distortion	20 %

Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable

Mechanical and Housing	
Housing Material	Steel
Reflector material	Steel
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	-
Housing Color	White

Optical cover finish	Opal
Overall length	1,440 mm
Overall width	163 mm
Overall height	67 mm
Dimensions (Height x Width x Depth)	67 x 163 x 1440 mm
Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK06 [1 J]
Net Weight (Piece)	3.100 kg

Emergency Operation	
Central Emergency	No

Approval and Application	
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @ 200mm to EN62471
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM) - Flickering value as 1 per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 °C to 45 °C

Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38,0.38)SDCM<3;(0.44,0.40)SDCM<3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L80
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L65 L70



Product Data	
Order product name	SM155C 37_60S/830_840 PSU TW3 PI5 L1440
Full product name	SM155C 37_60S/830_840 PSU TW3 PI5 L1440
Full product code	872016951017399
Order code	51017399
Material Nr. (12NC)	911401841585

CoreLine Fastset, surface-mounted


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169510173
Numerator - Packs per outer box	4

EAN/UPC - Case	8720169510258
----------------	---------------

Dimensional drawing

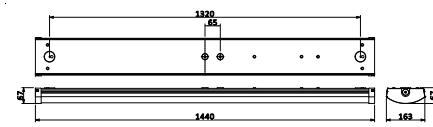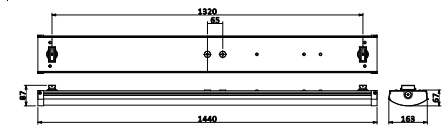

Photometric data



Polar Normal (separate) - null - 911401841585

