



# CoreLine Panel gen6

## RC132V G6 48S/940 PSD W60L60 OC IP65

CoreLine Panel gen6, 45 W, 600x600 mm, VPC, 4800 lm, 4000 K, CRI>90, DALI, UGR19

Philips CoreLine panel Gen6 delivers on the CoreLine promise of innovation, easy installation, and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative All-in feature offers a choice of three lumen packages and three-color temperatures in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing the CoreLine RC132V LED panel is quick and easy, using the product's quick connector or flywire. The CoreLine range includes Interact Ready luminaires with integrated wireless communications, ready to be used with Interact gateways, sensors, and software.

### Product data

General Information		Operating and Electrical	
Number of gear units	Unit	Correlated Colour Temperature (Nom)	4000 K
Driver included	Yes	Luminous efficacy (rated) (nom.)	105 lm/W
Service Tag	Yes	Colour rendering index (CRI)	>90
Value ladder	Performance	Beam angle of light source	90 degree(s)
Serviceability class	Class C, luminaire without serviceable parts, not serviceable	Light source colour	940 neutral white
Warranty period	5 years	Optic type	Beam angle 90°
Sustainability rating	Unclassified	Luminaire light beam spread	90°
Light Technical		Unified Glare Rating (CEN)	19
Luminous Flux	4,800 lm	Input Voltage	220 to 240 V
Saturated Red (R9)	>50	Line Frequency	50 or 60 Hz
		Inrush current	15.6 A

## CoreLine Panel gen6

Inrush time	0.295 ms
Power Consumption	45 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 4-pole
Cable	2 cables 0.15 m with connectors 2-pole
Number of products on MCB (16 A type B)	25
Suitable for random switching	Not applicable
Protection class IEC	Safety class II
Total harmonic distortion	20 %

### Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No
DALI standard	DALI-2™
Maximum dim level	1%

### Mechanical and Housing

Housing material	Steel
Reflector material	-
Optic material	Polystyrene
Optical cover/lens material	Polystyrene
Fixation material	-
Housing Colour	White
Optical cover/lens finish	Microprismatic lens
Overall length	595 mm
Overall width	595 mm
Overall height	78 mm
Dimensions (height x width x depth)	78 x 595 x 595 mm
Compatible ceiling or ceiling installation accessory type	Visible profile ceiling version
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK03 [0.3 J]
Safety device	SC [Safety cable]
Net Weight (Piece)	2.900 kg

### Emergency Operation

Central Emergency	No
-------------------	----

### Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
----------------	-----------------------------------

Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM)	1
Stroboscopic effect	0.4
Ambient temperature range	-10 to +35 °C

### Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%
Initial chromaticity	(0.38, 0.38) SDCM ≤3
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L85
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L75

### Product Data


Order product name	RC132V G6 48S/940 PSD W60L60 OC IP65
Full product name	RC132V G6 48S/940 PSD W60L60 OC IP65
Full EOC	872016973562099
Order code	911401891885
Material no. (12 NC)	911401891885
Numerator – quantity per pack	1
EAN/UPC – Product/Case	8720169735620
Numerator – packs per outer box	4
EAN/UPC – Case	8720169735644

# CoreLine Panel gen6

## Dimensional drawing

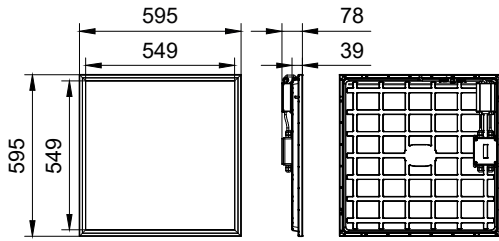

## Photometric data



Polar Normal (separate) - null - 911401891885

