



# MSR Hot Restrike

## MSR 575 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Arc Length O (Nom)	
Cap-Base	G22		7.0 mm
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Life to 50% Failures (Nom)	1,000 hour(s)	Power Consumption	575 W
		Lamp Current (Nom)	6.75 A
Light Technical		Controls and Dimming	
Color Code	- [Not Specified]	Dimmable	Yes
Luminous Flux (Min)	43,200 lm	Mechanical and Housing	
Luminous Flux	48,000 lm	Net Weight (Piece)	0.100 kg
Chromaticity Coordinate X (Nom)	323	Approval and Application	
Chromaticity Coordinate Y (Nom)	328	CE mark	Yes
Correlated Color Temperature (Nom)	6000 K		
Luminous Efficacy (Rated) (Min)	75 lm/W		
Luminous Efficacy (rated) (Nom)	83 lm/W		
Color rendering index (CRI)	90		


# MSR Hot Restrike

## Product Data

Order product name	MSR 575 HR 1CT/4
Full product name	MSR 575 HR 1CT/4
Full product code	871829122105000
Order code	22105000
Material Nr. (12NC)	928097705115


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291221050
Numerator - Packs per outer box	4
EAN/UPC - Case	8718291221067

## Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575	30 mm	7.0	69 mm	71 mm	70	145 mm	43 mm	42	41 mm
HR 1CT/4		mm			mm			mm	

## Photometric data

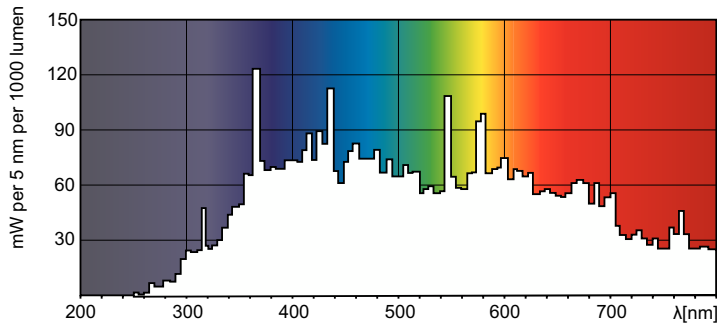

Spectral Power Distribution Colour - MSR 575 HR 1CT/4

