



MSR Hot Restrike

MSR 575 HR 1CT/4

High-efficiency hot restrike metal halide lamps designed for optimum light collection

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G22
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	1,000 hour(s)

Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	43,200 lm
Luminous Flux	48,000 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	75 lm/W
Luminous Efficacy (rated) (Nom)	83 lm/W
Color rendering index (CRI)	90
Arc Length O (Nom)	7.0 mm

Operating and Electrical	
Power Consumption	575 W
Lamp Current (Nom)	6.75 A

Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Net Weight (Piece)	0.100 kg

Approval and Application	
CE mark	Yes

Product Data	
Order product name	MSR 575 HR 1CT/4
Full product name	MSR 575 HR 1CT/4
Full product code	871829122105000
Order code	928097705115
Material Nr. (12NC)	928097705115
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291221050
Numerator - Packs per outer box	4
EAN/UPC - Case	8718291221067


MSR Hot Restrike

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575	30 mm	7.0	69 mm	71 mm	70	145 mm	43 mm	42	41 mm
HR 1CT/4		mm			mm			mm	

Photometric data

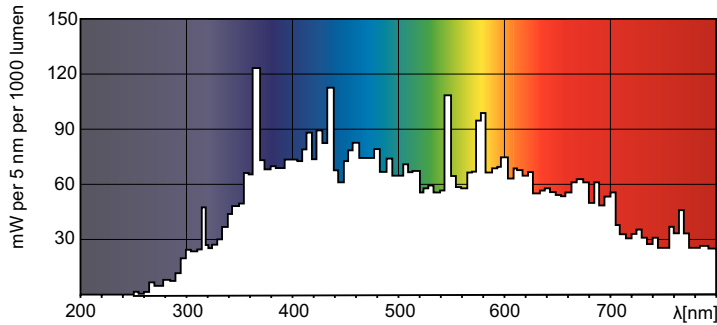

Spectral Power Distribution Colour - MSR 575 HR 1CT/4

