



# MSR Hot Restrike

## MSR 2500 HR 1CT/2

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Arc Length O (Nom)	
Cap-Base	G38		14.0 mm
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Life to 50% Failures (Nom)	500 hour(s)	Power Consumption	2,500 W
		Lamp Current (Nom)	24.4 A
Light Technical		Controls and Dimming	
Color Code	- [Not Specified]	Dimmable	Yes
Luminous Flux (Min)	207,900 lm	Mechanical and Housing	
Luminous Flux	231,000 lm	Net Weight (Piece)	0.305 kg
Chromaticity Coordinate X (Nom)	325	Product Data	
Chromaticity Coordinate Y (Nom)	328	Order product name	MSR 2500 HR 1CT/2
Correlated Color Temperature (Nom)	6000 K	Full product name	MSR 2500 HR 1CT/2
Luminous Efficacy (Rated) (Min)	83 lm/W	Full product code	872790092604000
Luminous Efficacy (rated) (Nom)	92 lm/W		
Color rendering index (CRI)	95		

## MSR Hot Restrike

Order code	928104905114
Material Nr. (12NC)	928104905114
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900926040


Numerator - Packs per outer box	2
EAN/UPC - Case	8727900926057

### Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 2500	60 mm	14.0	126 mm	128 mm	127	240 mm	67 mm	65	63 mm
HR 1CT/2		mm			mm			mm	

### Photometric data

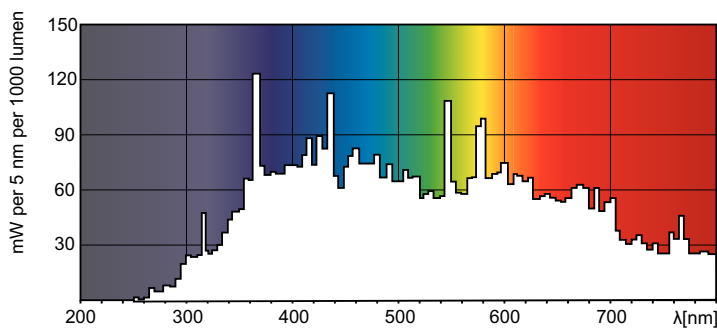

Spectral Power Distribution Colour - MSR 2500 HR 1CT/2

