

# LED Glass HID lamps

## 54GC/LED/830 EX39 BB 6/1

LED HPL, Oval Glass, Mains only, 54 W, MH 175W, HPS 150W, EX39, 3000 K, 9000 lm, 50000 hour(s)

Philips Glass HID lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. Thanks to our High-Power LED filament technology, this new generation of indoor/outdoor glass lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant savings with a low initial investment. They are designed to have the same aesthetics, lamp size and light distribution as the HID lamps they are replacing, so the upgrade to LED is easier than ever!

### Product data

General Information	
Cap-Base	EX39
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED HPL
Warranty period	3 years
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	9,000 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	166 lm/W
Color Consistency	<6
Color rendering index (CRI)	80

LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	54 W
Lamp Current (Max)	620 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	HIB_UL Type B (UL Listed+Classified)
Wattage Equivalent (LED HID only)	MH 175W, HPS 150W
Ballast Compatibility	Mains only

# LED Glass HID lamps

## Temperature

T-Case Maximum (Nom)	46.3 °C
----------------------	---------

## Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

## Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	Oval Glass
Net Weight (Piece)	0.290 kg

## Approval and Application

Energy Saving Product	Yes
Approval Marks	DLC compliance
Energy Consumption kWh/1000 h	54 kWh
EU RoHS compliant	Yes

Ambient temperature range	-20 to +45 °C
---------------------------	---------------


## Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

## Product Data


Order product name	54GC/LED/830 EX39 BB 6/1
Full product name	54GC/LED/830 EX39 BB 6/1
Order code	929003773604
Material Nr. (12NC)	929003773604
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677588250
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677588255

## Dimensional drawing




Product	D	C
54GC/LED/830 EX39 BB 6/1	103.5 mm	243 mm

## Photometric data




Light Distribution Diagram - 54GC/LED/830 EX39 BB 6/1

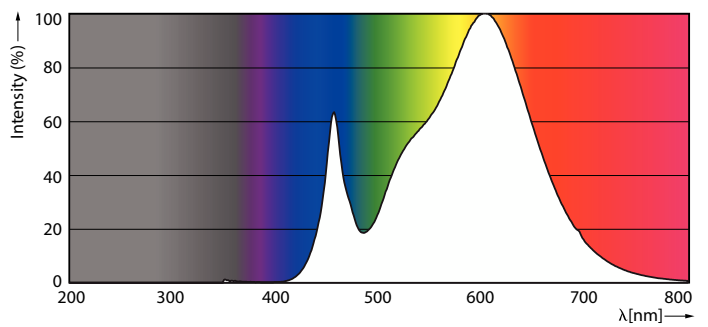

Spectral Power Distribution Colour - 54GC/LED/830 EX39 BB 6/1

# LED Glass HID lamps

## Photometric data




Technical Parameters 43  
Page 10

General uniform lighting - 54GC/LED/830 EX39 BB 6/1

## Lifetime



Life Expectancy Diagram

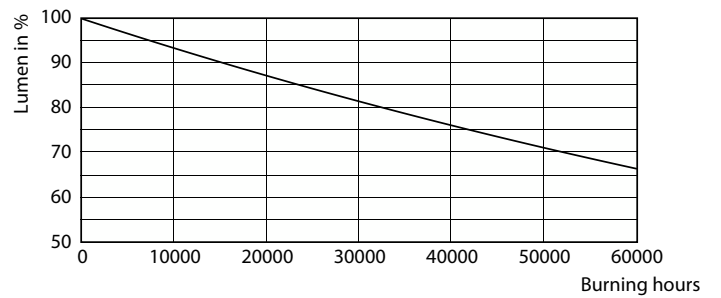

Lumen Maintenance Diagram - 54GC/LED/830 EX39 BB 6/1

