

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

CitySwan LED gen3 small
BPS/BRS/BWS639
Signify N.V.



GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify
Address	5600 VB Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	CitySwan LED gen3 small
Additional labels	BPS/BRS/BWS639
Product reference	919008636189
Place of production	DENMARK
Period for data	2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	5.4 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	6.71E+01
GWP-total, A1-A3 (kgCO ₂ e)	6.03E+01
Secondary material, inputs (%)	26.9
Secondary material, outputs (%)	59
Total energy use, A1-A3 (kWh)	344
Net fresh water use, A1-A3 (m ³ e)	0.94

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people’s lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT DESCRIPTION

The beautiful Philips CitySwan LED Gen3 luminaire was designed by Danish architects Bjarne Schläger and Morten Weeke Borup. With minimal materials, clean lines, and a white opal ‘lampshade,’ the CitySwan LED Gen3 offers a discreet yet noticeable presence in any city environment. At night, its patented glowing light technology highlights the luminaire's design while illuminating streets and spaces with soft, functional light that blends harmoniously with its surroundings. The CitySwan LED Gen3 can also create colorful light moods to emphasize local identity or provide urban spaces with an innovative atmosphere. Featuring our latest LED technology, flexible mounting options, and smart connectivity through System Ready (SR) Zhaga-D4i sockets—ready to pair with advanced control and lighting software applications such as Interact—it is a future-proof solution for modern cities. To reduce its carbon footprint, the canopy is made of bio-based plastic, and the main metal components are manufactured from recycled aluminum.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	41.15	EU , APAC
Minerals	1	APAC
Fossil materials	32.88	EU , APAC
Bio-based materials	24.98	EU

BIOGENIC CARBON CONTENT

Product’s biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	1.015
Biogenic carbon content in packaging, kg C	0.307

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	5.4 kg
Functional unit	3268 Lumens over 100000 hours
Reference service life	100000 hours

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify’s manufacturing facilities are included in this stage. The product is made of metals, plastics, and electronic components. All components are transported to Signify’s production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire. Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the

waste are due to ancillary materials used during manufacturing while the rest is due to material losses.

TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from DENMARK’s electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: $Wattage \times Reference\ lifetime = kWh$ consumed throughout the entire use phase B6.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

SYSTEM BOUNDARY

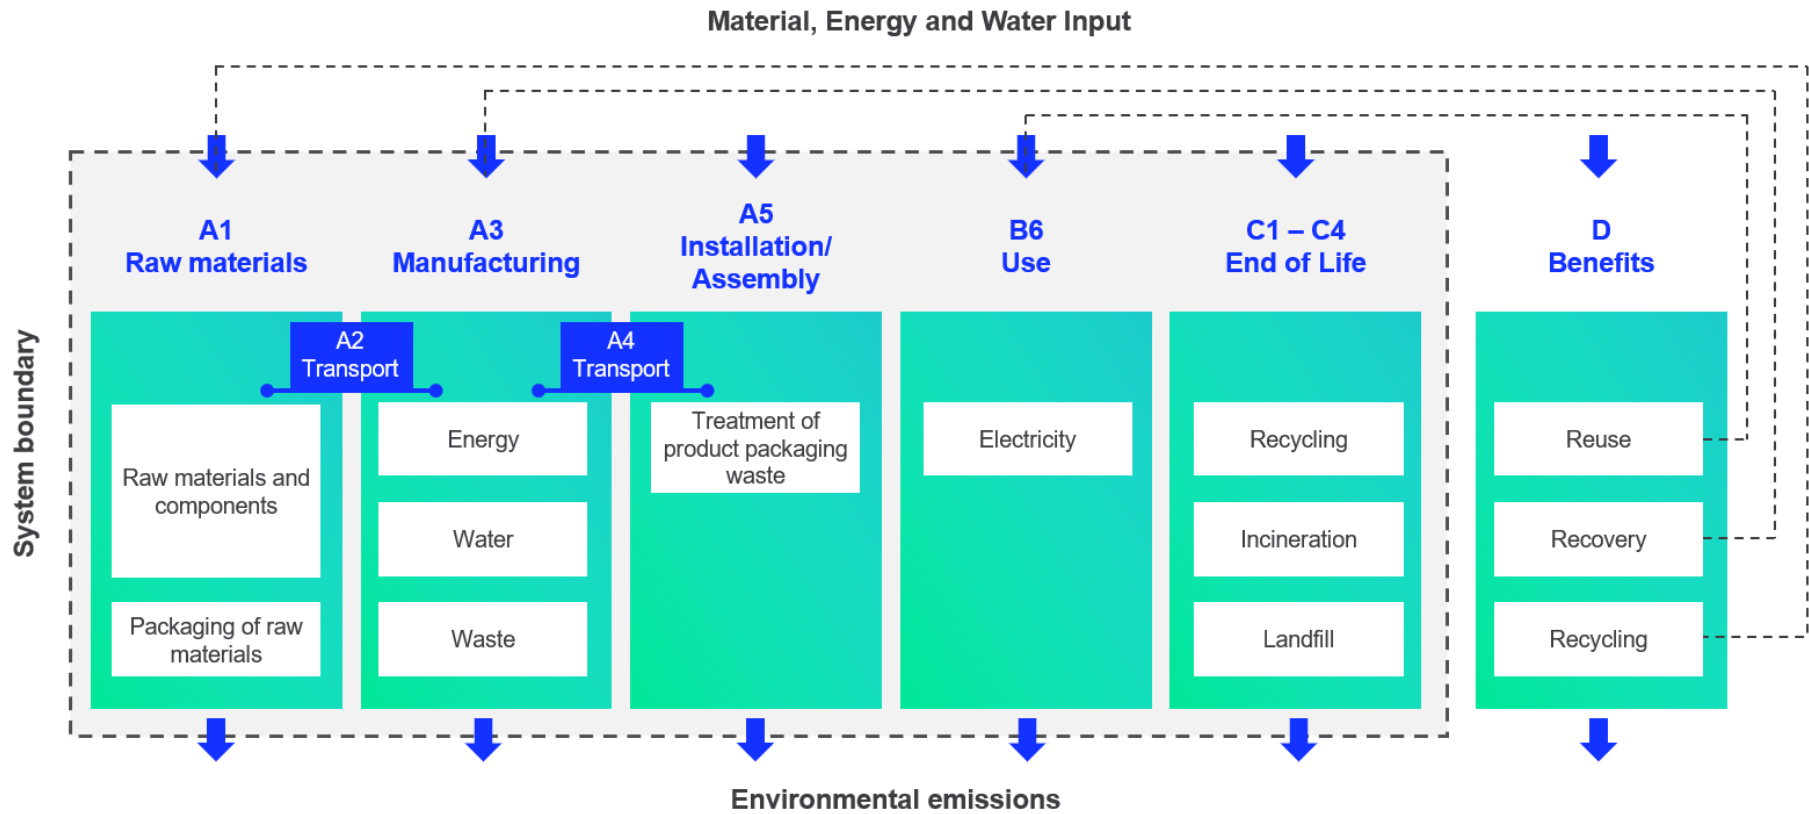

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. EcoInvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	4.24E+01	1.21E+00	1.67E+01	6.03E+01	1.21E+00	1.16E+00	MNR	MNR	MNR	MNR	MNR	6.09E+02	MNR	MNR	7.94E-02	3.84E+00	3.04E+00	-1.03E+01
GWP – fossil	kg CO ₂ e	4.81E+01	1.21E+00	1.78E+01	6.71E+01	1.21E+00	3.60E-02	MNR	MNR	MNR	MNR	MNR	6.08E+02	MNR	MNR	7.94E-02	3.84E+00	2.03E+00	-1.03E+01
GWP – biogenic	kg CO ₂ e	-5.23E+00	0.00E+00	-1.12E+00	-6.35E+00	4.67E-04	1.12E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	1.01E+00	-6.82E-03
GWP – LULUC	kg CO ₂ e	-4.89E-01	4.68E-04	3.95E-02	-4.49E-01	4.45E-04	1.28E-05	MNR	MNR	MNR	MNR	MNR	1.23E+00	MNR	MNR	2.93E-05	1.00E-04	5.49E-05	-2.83E-03
Ozone depletion pot.	kg CFC ₁₁ e	2.75E-06	2.76E-07	1.86E-06	4.88E-06	2.78E-07	2.99E-09	MNR	MNR	MNR	MNR	MNR	1.73E-05	MNR	MNR	1.83E-08	1.30E-08	9.67E-09	-2.78E-07
Acidification potential	mol H ⁺ e	5.58E-01	6.88E-03	6.69E-02	6.31E-01	5.11E-03	2.69E-04	MNR	MNR	MNR	MNR	MNR	2.49E+00	MNR	MNR	3.36E-04	1.39E-03	6.43E-04	-1.65E-01
EP-freshwater ²⁾	kg Pe	4.07E-03	9.60E-06	5.60E-04	4.64E-03	9.89E-06	3.34E-07	MNR	MNR	MNR	MNR	MNR	5.19E-02	MNR	MNR	6.50E-07	3.20E-06	1.94E-06	-7.58E-04
EP-marine	kg Ne	8.61E-02	1.94E-03	1.48E-02	1.03E-01	1.52E-03	1.21E-04	MNR	MNR	MNR	MNR	MNR	4.72E-01	MNR	MNR	9.99E-05	5.15E-04	5.68E-04	-1.28E-02
EP-terrestrial	mol Ne	8.51E-01	2.15E-02	1.44E-01	1.02E+00	1.68E-02	1.24E-03	MNR	MNR	MNR	MNR	MNR	6.18E+00	MNR	MNR	1.10E-03	5.43E-03	2.76E-03	-1.56E-01
POCP (“smog”) ³⁾	kg NMVOCe	2.22E-01	6.52E-03	6.66E-02	2.96E-01	5.36E-03	3.08E-04	MNR	MNR	MNR	MNR	MNR	1.42E+00	MNR	MNR	3.52E-04	1.36E-03	7.58E-04	-4.54E-02
ADP-minerals & metals ⁴⁾	kg Sbe	7.57E-03	2.77E-06	3.89E-04	7.96E-03	2.83E-06	9.28E-08	MNR	MNR	MNR	MNR	MNR	8.17E-03	MNR	MNR	1.86E-07	5.16E-06	2.55E-07	-2.17E-03
ADP-fossil resources	MJ	5.58E+02	1.80E+01	2.90E+02	8.66E+02	1.81E+01	2.62E-01	MNR	MNR	MNR	MNR	MNR	8.64E+03	MNR	MNR	1.19E+00	1.30E+00	8.46E-01	-1.01E+02
Water use ⁵⁾	m ³ e depr.	2.05E+01	7.93E-02	1.17E+01	3.23E+01	8.12E-02	5.44E-02	MNR	MNR	MNR	MNR	MNR	4.58E+02	MNR	MNR	5.33E-03	1.60E-01	9.17E-02	-1.13E+00

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	3.71E-06	1.34E-07	8.15E-07	4.66E-06	1.39E-07	2.40E-09	MNR	MNR	MNR	MNR	MNR	1.54E-05	MNR	MNR	9.15E-09	1.10E-08	6.06E-09	-8.01E-07
Ionizing radiation ⁶⁾	kBq U235e	3.19E+00	8.55E-02	8.74E-01	4.15E+00	8.64E-02	8.41E-04	MNR	MNR	MNR	MNR	MNR	1.49E+02	MNR	MNR	5.68E-03	6.22E-03	3.67E-03	-5.94E-01
Ecotoxicity (freshwater)	CTUe	3.64E+03	1.60E+01	3.92E+02	4.05E+03	1.63E+01	1.21E+00	MNR	MNR	MNR	MNR	MNR	1.56E+04	MNR	MNR	1.07E+00	1.05E+01	1.57E+02	-7.03E+02
Human toxicity, cancer	CTUh	1.72E-07	4.18E-10	1.32E-08	1.86E-07	4.01E-10	1.02E-10	MNR	MNR	MNR	MNR	MNR	3.89E-07	MNR	MNR	2.63E-11	4.11E-10	1.08E-09	-1.39E-08
Human tox. non-cancer	CTUh	4.02E-06	1.56E-08	3.57E-07	4.39E-06	1.61E-08	3.97E-09	MNR	MNR	MNR	MNR	MNR	1.18E-05	MNR	MNR	1.06E-09	1.61E-08	6.65E-08	-1.45E-06
SQP ⁷⁾	-	3.55E+02	1.99E+01	1.10E+03	1.47E+03	2.09E+01	1.67E-01	MNR	MNR	MNR	MNR	MNR	1.05E+04	MNR	MNR	1.37E+00	1.25E+00	1.05E+00	-5.04E+01

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	7.77E+01	1.99E-01	3.49E+02	4.27E+02	2.04E-01	6.55E-03	MNR	MNR	MNR	MNR	MNR	7.32E+03	MNR	MNR	1.34E-02	1.16E-01	3.11E-02	-5.19E+00
Renew. PER as material	MJ	1.08E+01	0.00E+00	1.09E+01	2.17E+01	0.00E+00	-1.09E+01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-5.07E-01	-1.03E+01	0.00E+00
Total use of renew. PER	MJ	8.85E+01	1.99E-01	3.60E+02	4.48E+02	2.04E-01	-1.09E+01	MNR	MNR	MNR	MNR	MNR	7.32E+03	MNR	MNR	1.34E-02	-3.91E-01	-1.03E+01	-5.19E+00
Non-re. PER as energy	MJ	5.30E+02	1.80E+01	2.65E+02	8.13E+02	1.81E+01	2.63E-01	MNR	MNR	MNR	MNR	MNR	8.64E+03	MNR	MNR	1.19E+00	1.30E+00	8.47E-01	-1.01E+02
Non-re. PER as material	MJ	2.94E+01	0.00E+00	2.59E-01	2.96E+01	0.00E+00	-2.59E-01	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	-1.01E+01	-1.11E+01	0.00E+00
Total use of non-re. PER	MJ	5.59E+02	1.80E+01	2.66E+02	8.43E+02	1.81E+01	3.86E-03	MNR	MNR	MNR	MNR	MNR	8.64E+03	MNR	MNR	1.19E+00	-8.83E+00	-1.03E+01	-1.01E+02
Secondary materials	kg	1.45E+00	5.13E-03	3.29E-01	1.79E+00	5.04E-03	2.88E-04	MNR	MNR	MNR	MNR	MNR	2.32E+00	MNR	MNR	3.31E-04	1.18E-03	1.41E-03	3.93E-01
Renew. secondary fuels	MJ	5.88E-02	4.91E-05	1.58E-02	7.47E-02	5.08E-05	2.82E-06	MNR	MNR	MNR	MNR	MNR	1.70E-02	MNR	MNR	3.34E-06	5.35E-05	1.91E-05	-1.66E-03
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m ³	4.76E-01	2.28E-03	4.59E-01	9.37E-01	2.35E-03	3.14E-04	MNR	MNR	MNR	MNR	MNR	2.25E+01	MNR	MNR	1.54E-04	5.90E-03	3.12E-03	-5.39E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	8.68E+00	2.39E-02	1.14E+00	9.85E+00	2.40E-02	2.46E-02	MNR	MNR	MNR	MNR	MNR	6.85E+01	MNR	MNR	1.58E-03	4.48E-03	3.78E-02	-1.57E+00
Non-hazardous waste	kg	1.33E+02	3.83E-01	1.86E+01	1.52E+02	3.95E-01	1.81E-01	MNR	MNR	MNR	MNR	MNR	2.24E+03	MNR	MNR	2.60E-02	1.71E+00	2.42E+00	-4.97E+01
Radioactive waste	kg	1.33E-03	1.21E-04	4.93E-04	1.94E-03	1.21E-04	8.14E-07	MNR	MNR	MNR	MNR	MNR	3.77E-02	MNR	MNR	7.97E-06	2.48E-06	0.00E+00	-2.22E-04

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.59E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	1.59E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	9.81E-01	9.81E-01	0.00E+00	0.00E+00	MNR	MNR	MNR	MNR	MNR	0.00E+00	MNR	MNR	0.00E+00	3.50E+01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	4.96E+01	1.20E+00	1.76E+01	6.85E+01	1.20E+00	3.41E-02	MNR	MNR	MNR	MNR	MNR	6.00E+02	MNR	MNR	7.86E-02	3.83E+00	2.10E+00	-1.01E+01
Ozone depletion Pot.	kg CFC ₁₁ e	2.58E-06	2.18E-07	1.67E-06	4.47E-06	2.20E-07	2.54E-09	MNR	MNR	MNR	MNR	MNR	1.54E-05	MNR	MNR	1.45E-08	1.13E-08	8.14E-09	-2.35E-07
Acidification	kg SO ₂ e	4.35E-01	5.39E-03	5.46E-02	4.95E-01	3.97E-03	1.94E-04	MNR	MNR	MNR	MNR	MNR	1.97E+00	MNR	MNR	2.61E-04	1.04E-03	4.71E-04	-1.44E-01
Eutrophication	kg PO ₄ ³ e	1.50E-01	1.04E-03	2.30E-02	1.74E-01	9.05E-04	1.52E-04	MNR	MNR	MNR	MNR	MNR	1.96E+00	MNR	MNR	5.95E-05	5.85E-04	6.03E-03	-3.40E-02
POCP ("smog")	kg C ₂ H ₄ e	2.32E-02	1.89E-04	3.96E-03	2.73E-02	1.55E-04	5.31E-06	MNR	MNR	MNR	MNR	MNR	9.47E-02	MNR	MNR	1.02E-05	2.95E-05	4.90E-05	-6.37E-03
ADP-elements	kg Sbe	7.59E-03	2.68E-06	3.86E-04	7.98E-03	2.74E-06	7.40E-08	MNR	MNR	MNR	MNR	MNR	8.15E-03	MNR	MNR	1.80E-07	5.08E-06	2.14E-07	-2.17E-03
ADP-fossil	MJ	6.06E+02	1.80E+01	2.90E+02	9.14E+02	1.81E+01	2.62E-01	MNR	MNR	MNR	MNR	MNR	8.64E+03	MNR	MNR	1.19E+00	1.30E+00	8.46E-01	-1.01E+02

APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

Table A2 Scaled GWP per scaling factor (EPD Hub aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
BRS639/BPS639/BWS639 LED100/722	7896.0	82.0	96.3	2.562	2.562	1.921	1.921	1.409	1560.3	1169.9	1169.9	858.1
BRS639/BPS639/BWS639 LED20/722	1696.5	17.0	99.8	0.531	0.531	0.398	0.398	0.292	323.4	242.4	242.4	177.8
BRS639/BPS639/BWS639 LED30/722	2494.0	25.5	97.8	0.797	0.797	0.598	0.598	0.438	485.4	364.2	364.2	266.7
BRS639/BPS639/BWS639 LED40/722	3268.0	34.5	94.7	1.078	1.078	0.808	0.808	0.593	656.5	492.1	492.1	361.1
BRS639/BPS639/BWS639 LED50/722	4214.0	39.5	106.7	1.234	1.234	0.925	0.925	0.679	751.5	563.3	563.3	413.5
BRS639/BPS639/BWS639 LED60/722	4988.0	47.5	105.0	1.484	1.484	1.113	1.113	0.816	903.8	677.8	677.8	496.9
BRS639/BPS639/BWS639 LED70/722	5780.0	56.0	103.2	1.75	1.75	1.312	1.312	0.963	1065.8	799.0	799.0	586.5
BRS639/BPS639/BWS639 LED80/722	6460.0	64.0	100.9	2.0	2.0	1.5	1.5	1.1	1218.0	913.5	913.5	669.9
BRS639/BPS639/BWS639 LED90/722	7310.0	73.0	100.1	2.281	2.281	1.711	1.711	1.255	1389.1	1042.0	1042.0	764.3
BRS639/BPS639/BWS639 LED100/727	8064.0	70.0	115.2	2.188	2.188	1.641	1.641	1.203	1332.5	999.4	999.4	732.6
BRS639/BPS639/BWS639 LED20/727	1696.5	14.8	114.6	0.463	0.463	0.347	0.347	0.255	282.0	211.3	211.3	155.3
BRS639/BPS639/BWS639 LED30/727	2494.0	21.5	116.0	0.672	0.672	0.504	0.504	0.37	409.2	306.9	306.9	225.3
BRS639/BPS639/BWS639 LED40/727	3354.0	29.5	113.7	0.922	0.922	0.692	0.692	0.507	561.5	421.4	421.4	308.8
BRS639/BPS639/BWS639 LED50/727	4214.0	34.5	122.1	1.078	1.078	0.808	0.808	0.593	656.5	492.1	492.1	361.1
BRS639/BPS639/BWS639 LED60/727	4988.0	40.5	123.2	1.266	1.266	0.95	0.95	0.696	771.0	578.5	578.5	423.9
BRS639/BPS639/BWS639 LED70/727	5780.0	47.5	121.7	1.484	1.484	1.113	1.113	0.816	903.8	677.8	677.8	496.9
BRS639/BPS639/BWS639 LED80/727	6630.0	55.0	120.5	1.719	1.719	1.289	1.289	0.945	1046.9	785.0	785.0	575.5

BRS639/BPS639/BWS639 LED90/727	7310.0	62.0	117.9	1.938	1.938	1.454	1.454	1.066	1180.2	885.5	885.5	649.2
BRS639/BPS639/BWS639 LED100/730	8160.0	62.0	131.6	1.938	1.938	1.454	1.454	1.066	1180.2	885.5	885.5	649.2
BRS639/BPS639/BWS639 LED20/730	1696.5	13.4	126.6	0.419	0.419	0.314	0.314	0.23	255.2	191.2	191.2	140.1
BRS639/BPS639/BWS639 LED30/730	2523.0	19.6	128.7	0.613	0.613	0.46	0.46	0.337	373.3	280.1	280.1	205.2
BRS639/BPS639/BWS639 LED40/730	3354.0	26.5	126.6	0.828	0.828	0.621	0.621	0.455	504.3	378.2	378.2	277.1
BRS639/BPS639/BWS639 LED50/730	4214.0	30.5	138.2	0.953	0.953	0.715	0.715	0.524	580.4	435.4	435.4	319.1
BRS639/BPS639/BWS639 LED60/730	4988.0	36.5	136.7	1.141	1.141	0.856	0.856	0.628	694.9	521.3	521.3	382.5
BRS639/BPS639/BWS639 LED70/730	5848.0	42.5	137.6	1.328	1.328	0.996	0.996	0.73	808.8	606.6	606.6	444.6
BRS639/BPS639/BWS639 LED80/730	6630.0	49.5	133.9	1.547	1.547	1.16	1.16	0.851	942.1	706.4	706.4	518.3
BRS639/BPS639/BWS639 LED90/730	7480.0	56.0	133.6	1.75	1.75	1.312	1.312	0.963	1065.8	799.0	799.0	586.5
BRS639/BPS639/BWS639 LED100/740	8160.0	58.0	140.7	1.812	1.812	1.359	1.359	0.997	1103.5	827.6	827.6	607.2
BRS639/BPS639/BWS639 LED20/740	1696.5	12.6	134.6	0.394	0.394	0.295	0.295	0.217	239.9	179.7	179.7	132.2
BRS639/BPS639/BWS639 LED30/740	2523.0	18.4	137.1	0.575	0.575	0.431	0.431	0.316	350.2	262.5	262.5	192.4
BRS639/BPS639/BWS639 LED40/740	3393.0	25.0	135.7	0.781	0.781	0.586	0.586	0.43	475.6	356.9	356.9	261.9
BRS639/BPS639/BWS639 LED50/740	4214.0	29.0	145.3	0.906	0.906	0.679	0.679	0.498	551.8	413.5	413.5	303.3
BRS639/BPS639/BWS639 LED60/740	4988.0	35.0	142.5	1.094	1.094	0.821	0.821	0.602	666.2	500.0	500.0	366.6
BRS639/BPS639/BWS639 LED70/740	5848.0	40.5	144.4	1.266	1.266	0.95	0.95	0.696	771.0	578.5	578.5	423.9
BRS639/BPS639/BWS639 LED80/740	6708.0	46.5	144.3	1.453	1.453	1.09	1.09	0.799	884.9	663.8	663.8	486.6
BRS639/BPS639/BWS639 LED90/740	7480.0	52.0	143.8	1.625	1.625	1.219	1.219	0.894	989.6	742.4	742.4	544.4
BRS639/BPS639/BWS639 LED100/827	7896.0	82.0	96.3	2.562	2.562	1.921	1.921	1.409	1560.3	1169.9	1169.9	858.1
BRS639/BPS639/BWS639 LED20/827	1696.5	17.0	99.8	0.531	0.531	0.398	0.398	0.292	323.4	242.4	242.4	177.8
BRS639/BPS639/BWS639 LED30/827	2494.0	25.5	97.8	0.797	0.797	0.598	0.598	0.438	485.4	364.2	364.2	266.7
BRS639/BPS639/BWS639 LED40/827	3268.0	34.5	94.7	1.078	1.078	0.808	0.808	0.593	656.5	492.1	492.1	361.1
BRS639/BPS639/BWS639 LED50/827	4214.0	39.5	106.7	1.234	1.234	0.925	0.925	0.679	751.5	563.3	563.3	413.5

BRS639/BPS639/BWS639 LED60/827	4988.0	47.5	105.0	1.484	1.484	1.113	1.113	0.816	903.8	677.8	677.8	496.9
BRS639/BPS639/BWS639 LED70/827	5780.0	56.0	103.2	1.75	1.75	1.312	1.312	0.963	1065.8	799.0	799.0	586.5
BRS639/BPS639/BWS639 LED80/827	6460.0	64.0	100.9	2.0	2.0	1.5	1.5	1.1	1218.0	913.5	913.5	669.9
BRS639/BPS639/BWS639 LED90/827	7310.0	73.0	100.1	2.281	2.281	1.711	1.711	1.255	1389.1	1042.0	1042.0	764.3
BRS639/BPS639/BWS639 LED100/830	8160.0	76.0	107.4	2.375	2.375	1.781	1.781	1.306	1446.4	1084.6	1084.6	795.4
BRS639/BPS639/BWS639 LED20/830	1696.5	16.0	106.0	0.5	0.5	0.375	0.375	0.275	304.5	228.4	228.4	167.5
BRS639/BPS639/BWS639 LED30/830	2523.0	23.5	107.4	0.734	0.734	0.55	0.55	0.404	447.0	335.0	335.0	246.0
<u>BRS639/BPS639/BWS639 LED40/830</u>	3268.0	32.0	102.1	1.0	1.0	0.75	0.75	0.55	609.0	456.8	456.8	335.0
BRS639/BPS639/BWS639 LED50/830	4214.0	37.0	113.9	1.156	1.156	0.867	0.867	0.636	704.0	528.0	528.0	387.3
BRS639/BPS639/BWS639 LED60/830	4988.0	44.0	113.4	1.375	1.375	1.031	1.031	0.756	837.4	627.9	627.9	460.4
BRS639/BPS639/BWS639 LED70/830	5780.0	52.0	111.2	1.625	1.625	1.219	1.219	0.894	989.6	742.4	742.4	544.4
BRS639/BPS639/BWS639 LED80/830	6460.0	59.0	109.5	1.844	1.844	1.383	1.383	1.014	1123.0	842.2	842.2	617.5
BRS639/BPS639/BWS639 LED90/830	7310.0	67.0	109.1	2.094	2.094	1.571	1.571	1.152	1275.2	956.7	956.7	701.6
BRS639/BPS639/BWS639 LED100/840	8160.0	73.0	111.8	2.281	2.281	1.711	1.711	1.255	1389.1	1042.0	1042.0	764.3
BRS639/BPS639/BWS639 LED20/840	1696.5	15.4	110.2	0.481	0.481	0.361	0.361	0.265	292.9	219.8	219.8	161.4
BRS639/BPS639/BWS639 LED30/840	2494.0	23.0	108.4	0.719	0.719	0.539	0.539	0.395	437.9	328.3	328.3	240.6
BRS639/BPS639/BWS639 LED40/840	3354.0	31.0	108.2	0.969	0.969	0.727	0.727	0.533	590.1	442.7	442.7	324.6
BRS639/BPS639/BWS639 LED50/840	4214.0	35.5	118.7	1.109	1.109	0.832	0.832	0.61	675.4	506.7	506.7	371.5
BRS639/BPS639/BWS639 LED60/840	4988.0	42.5	117.4	1.328	1.328	0.996	0.996	0.73	808.8	606.6	606.6	444.6
BRS639/BPS639/BWS639 LED70/840	5780.0	50.0	115.6	1.562	1.562	1.171	1.171	0.859	951.3	713.1	713.1	523.1
BRS639/BPS639/BWS639 LED80/840	6460.0	57.0	113.3	1.781	1.781	1.336	1.336	0.98	1084.6	813.6	813.6	596.8
BRS639/BPS639/BWS639 LED90/840	7310.0	65.0	112.5	2.031	2.031	1.523	1.523	1.117	1236.9	927.5	927.5	680.3

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (RSL) of each product within the same product family.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base} .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (O_{lum}) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SI_{pep}) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ($PGSF$), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table A3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
BRS639/BPS639/BWS639 LED100/722	7896.0	82.0	96.3	2.562	0.113	0.085	0.085	0.062	68.8	51.8	51.8	37.8
BRS639/BPS639/BWS639 LED20/722	1696.5	17.0	99.8	0.531	0.109	0.082	0.082	0.06	66.4	49.9	49.9	36.5
BRS639/BPS639/BWS639 LED30/722	2494.0	25.5	97.8	0.797	0.112	0.084	0.084	0.062	68.2	51.2	51.2	37.8
BRS639/BPS639/BWS639 LED40/722	3268.0	34.5	94.7	1.078	0.115	0.086	0.086	0.063	70.0	52.4	52.4	38.4
BRS639/BPS639/BWS639 LED50/722	4214.0	39.5	106.7	1.234	0.102	0.076	0.076	0.056	62.1	46.3	46.3	34.1

BRS639/BPS639/BWS639 LED60/722	4988.0	47.5	105.0	1.484	0.104	0.078	0.078	0.057	63.3	47.5	47.5	34.7
BRS639/BPS639/BWS639 LED70/722	5780.0	56.0	103.2	1.75	0.107	0.08	0.08	0.059	65.2	48.7	48.7	35.9
BRS639/BPS639/BWS639 LED80/722	6460.0	64.0	100.9	2.0	0.108	0.081	0.081	0.059	65.8	49.3	49.3	35.9
BRS639/BPS639/BWS639 LED90/722	7310.0	73.0	100.1	2.281	0.109	0.082	0.082	0.06	66.4	49.9	49.9	36.5
BRS639/BPS639/BWS639 LED100/727	8064.0	70.0	115.2	2.188	0.094	0.071	0.071	0.052	57.2	43.2	43.2	31.7
BRS639/BPS639/BWS639 LED20/727	1696.5	14.8	114.6	0.463	0.095	0.071	0.071	0.052	57.9	43.2	43.2	31.7
BRS639/BPS639/BWS639 LED30/727	2494.0	21.5	116.0	0.672	0.094	0.071	0.071	0.052	57.2	43.2	43.2	31.7
BRS639/BPS639/BWS639 LED40/727	3354.0	29.5	113.7	0.922	0.096	0.072	0.072	0.053	58.5	43.8	43.8	32.3
BRS639/BPS639/BWS639 LED50/727	4214.0	34.5	122.1	1.078	0.089	0.067	0.067	0.049	54.2	40.8	40.8	29.8
BRS639/BPS639/BWS639 LED60/727	4988.0	40.5	123.2	1.266	0.089	0.067	0.067	0.049	54.2	40.8	40.8	29.8
BRS639/BPS639/BWS639 LED70/727	5780.0	47.5	121.7	1.484	0.091	0.068	0.068	0.05	55.4	41.4	41.4	30.5
BRS639/BPS639/BWS639 LED80/727	6630.0	55.0	120.5	1.719	0.091	0.068	0.068	0.05	55.4	41.4	41.4	30.5
BRS639/BPS639/BWS639 LED90/727	7310.0	62.0	117.9	1.938	0.093	0.07	0.07	0.051	56.6	42.6	42.6	31.1
BRS639/BPS639/BWS639 LED100/730	8160.0	62.0	131.6	1.938	0.083	0.062	0.062	0.046	50.5	37.8	37.8	28.0
BRS639/BPS639/BWS639 LED20/730	1696.5	13.4	126.6	0.419	0.086	0.065	0.065	0.047	52.4	39.6	39.6	28.6
BRS639/BPS639/BWS639 LED30/730	2523.0	19.6	128.7	0.613	0.085	0.064	0.064	0.047	51.8	39.0	39.0	28.6
BRS639/BPS639/BWS639 LED40/730	3354.0	26.5	126.6	0.828	0.086	0.065	0.065	0.047	52.4	39.6	39.6	28.6
BRS639/BPS639/BWS639 LED50/730	4214.0	30.5	138.2	0.953	0.079	0.059	0.059	0.043	48.1	35.9	35.9	26.2
BRS639/BPS639/BWS639 LED60/730	4988.0	36.5	136.7	1.141	0.08	0.06	0.06	0.044	48.7	36.5	36.5	26.8
BRS639/BPS639/BWS639 LED70/730	5848.0	42.5	137.6	1.328	0.08	0.06	0.06	0.044	48.7	36.5	36.5	26.8
BRS639/BPS639/BWS639 LED80/730	6630.0	49.5	133.9	1.547	0.082	0.061	0.061	0.045	49.9	37.1	37.1	27.4
BRS639/BPS639/BWS639 LED90/730	7480.0	56.0	133.6	1.75	0.082	0.061	0.061	0.045	49.9	37.1	37.1	27.4
BRS639/BPS639/BWS639 LED100/740	8160.0	58.0	140.7	1.812	0.078	0.058	0.058	0.043	47.5	35.3	35.3	26.2
BRS639/BPS639/BWS639 LED20/740	1696.5	12.6	134.6	0.394	0.081	0.061	0.061	0.045	49.3	37.1	37.1	27.4

BRS639/BPS639/BWS639 LED30/740	2523.0	18.4	137.1	0.575	0.08	0.06	0.06	0.044	48.7	36.5	36.5	26.8
BRS639/BPS639/BWS639 LED40/740	3393.0	25.0	135.7	0.781	0.08	0.06	0.06	0.044	48.7	36.5	36.5	26.8
BRS639/BPS639/BWS639 LED50/740	4214.0	29.0	145.3	0.906	0.075	0.056	0.056	0.041	45.7	34.1	34.1	25.0
BRS639/BPS639/BWS639 LED60/740	4988.0	35.0	142.5	1.094	0.077	0.058	0.058	0.042	46.9	35.3	35.3	25.6
BRS639/BPS639/BWS639 LED70/740	5848.0	40.5	144.4	1.266	0.076	0.057	0.057	0.042	46.3	34.7	34.7	25.6
BRS639/BPS639/BWS639 LED80/740	6708.0	46.5	144.3	1.453	0.076	0.057	0.057	0.042	46.3	34.7	34.7	25.6
BRS639/BPS639/BWS639 LED90/740	7480.0	52.0	143.8	1.625	0.076	0.057	0.057	0.042	46.3	34.7	34.7	25.6
BRS639/BPS639/BWS639 LED100/827	7896.0	82.0	96.3	2.562	0.113	0.085	0.085	0.062	68.8	51.8	51.8	37.8
BRS639/BPS639/BWS639 LED20/827	1696.5	17.0	99.8	0.531	0.109	0.082	0.082	0.06	66.4	49.9	49.9	36.5
BRS639/BPS639/BWS639 LED30/827	2494.0	25.5	97.8	0.797	0.112	0.084	0.084	0.062	68.2	51.2	51.2	37.8
BRS639/BPS639/BWS639 LED40/827	3268.0	34.5	94.7	1.078	0.115	0.086	0.086	0.063	70.0	52.4	52.4	38.4
BRS639/BPS639/BWS639 LED50/827	4214.0	39.5	106.7	1.234	0.102	0.076	0.076	0.056	62.1	46.3	46.3	34.1
BRS639/BPS639/BWS639 LED60/827	4988.0	47.5	105.0	1.484	0.104	0.078	0.078	0.057	63.3	47.5	47.5	34.7
BRS639/BPS639/BWS639 LED70/827	5780.0	56.0	103.2	1.75	0.107	0.08	0.08	0.059	65.2	48.7	48.7	35.9
BRS639/BPS639/BWS639 LED80/827	6460.0	64.0	100.9	2.0	0.108	0.081	0.081	0.059	65.8	49.3	49.3	35.9
BRS639/BPS639/BWS639 LED90/827	7310.0	73.0	100.1	2.281	0.109	0.082	0.082	0.06	66.4	49.9	49.9	36.5
BRS639/BPS639/BWS639 LED100/830	8160.0	76.0	107.4	2.375	0.102	0.076	0.076	0.056	62.1	46.3	46.3	34.1
BRS639/BPS639/BWS639 LED20/830	1696.5	16.0	106.0	0.5	0.103	0.077	0.077	0.057	62.7	46.9	46.9	34.7
BRS639/BPS639/BWS639 LED30/830	2523.0	23.5	107.4	0.734	0.102	0.076	0.076	0.056	62.1	46.3	46.3	34.1
BRS639/BPS639/BWS639 LED40/830	3268.0	32.0	102.1	1.0	0.107	0.08	0.08	0.059	65.2	48.7	48.7	35.9
BRS639/BPS639/BWS639 LED50/830	4214.0	37.0	113.9	1.156	0.096	0.072	0.072	0.053	58.5	43.8	43.8	32.3
BRS639/BPS639/BWS639 LED60/830	4988.0	44.0	113.4	1.375	0.096	0.072	0.072	0.053	58.5	43.8	43.8	32.3
BRS639/BPS639/BWS639 LED70/830	5780.0	52.0	111.2	1.625	0.099	0.074	0.074	0.054	60.3	45.1	45.1	32.9
BRS639/BPS639/BWS639 LED80/830	6460.0	59.0	109.5	1.844	0.1	0.075	0.075	0.055	60.9	45.7	45.7	33.5

BRS639/BPS639/BWS639 LED90/830	7310.0	67.0	109.1	2.094	0.101	0.076	0.076	0.056	61.5	46.3	46.3	34.1
BRS639/BPS639/BWS639 LED100/840	8160.0	73.0	111.8	2.281	0.098	0.074	0.074	0.054	59.7	45.1	45.1	32.9
BRS639/BPS639/BWS639 LED20/840	1696.5	15.4	110.2	0.481	0.099	0.074	0.074	0.054	60.3	45.1	45.1	32.9
BRS639/BPS639/BWS639 LED30/840	2494.0	23.0	108.4	0.719	0.101	0.076	0.076	0.056	61.5	46.3	46.3	34.1
BRS639/BPS639/BWS639 LED40/840	3354.0	31.0	108.2	0.969	0.101	0.076	0.076	0.056	61.5	46.3	46.3	34.1
BRS639/BPS639/BWS639 LED50/840	4214.0	35.5	118.7	1.109	0.092	0.069	0.069	0.051	56.0	42.0	42.0	31.1
BRS639/BPS639/BWS639 LED60/840	4988.0	42.5	117.4	1.328	0.093	0.07	0.07	0.051	56.6	42.6	42.6	31.1
BRS639/BPS639/BWS639 LED70/840	5780.0	50.0	115.6	1.562	0.095	0.071	0.071	0.052	57.9	43.2	43.2	31.7
BRS639/BPS639/BWS639 LED80/840	6460.0	57.0	113.3	1.781	0.096	0.072	0.072	0.053	58.5	43.8	43.8	32.3
BRS639/BPS639/BWS639 LED90/840	7310.0	65.0	112.5	2.031	0.097	0.073	0.073	0.053	59.1	44.5	44.5	32.3

*** Note that if the product is non-dimmable, only the values for “NC (No Control)” are valid; if the driver type is PSU, only the values for “NC (No Control)” and “PS (presence sensing)” for are valid.*

ANNEX

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

The table in this annex is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

This EPD was done according to a specific customer use location that can be read in the paragraph **PRODUCT USE AND MAINTENANCE (B1-B7)**.

If for example the EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ²¹	kg CO _{2e}	5,88E+00	2,61E-01	-1,25E-01	6,02E+00	3,02E-01	5,41E-01	MND	MND	MND	MND	MND	4,06E+02	MND	MNR	1,77E-02	2,62E-01	1,88E-01	-1,09E+01

Divide that value according to the EU value from the following table (EU = 3,96E-01) and then multiplying for the Finland value from the same table (FINLAND = 2,70E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = (4,06E+02 / 3,96E-01) x 2,70E-01 = 2,76 E+02

Country	GWP tot (kg CO2 eq. per kwh)
AUSTRALIA	9,59E-01
AUSTRIA	3,37E-01
BELGIUM	2,63E-01
CHINA	1,14E+00
DENMARK	2,91E-01
EU	3,96E-01
FINLAND	2,70E-01
FRANCE	8,77E-02
GERMANY	5,32E-01
HUNGARY	4,67E-01
IRELAND	4,26E-01
ITALY	3,94E-01
LATAM	3,50E-01
NAM	4,83E-01
NETHERLANDS	5,88E-01
NORWAY	2,59E-02

POLAND	1,05E+00
PORTUGAL	4,22E-01
ROW	7,32E-01
SPAIN	3,34E-01
SWEDEN	4,95E-02
SWITZERLAND	5,38E-02
UK	3,17E-01

Source Ecoinvent 3.8