

# Built for performance - Waterproof Lighting solution for Dusty and Humid application

## Smartbright WT200/201 waterproof

Smartbright Waterproof luminaire is a special application luminaire designed to provide uninterrupted lighting for dusty and humid indoor application. It is a perfect solution for lighting up indoor spaces like multilevel car park, open canopies in bus stations and general industrial applications. The luminaire has all-weather polycarbonate housing and highly efficient electronics with LED system to offer long useful life even in adverse application and environmental conditions. With unique design, variety of options in lumen packs and color temperature makes it suitable for diverse applications.

### Benefits

- Rugged & Suitable for dusty and humid environment
- Ensures long useful life and reliable performance even in extreme conditions
- Greater energy savings help end users to reduce ROI
- Application & Design freedom provides flexibility to user
- Creates a diffused natural light, ensuring visual comfort
- Easy to install

# Smartbright WT200/201 waterproof

## Features

- High ingress protection – IP65
- High Impact resistance- IK08
- Compact integral design with superior efficacy > 120lm/w
- Multiple lumen packs & CCT
- Light color: 4000K, 6500K, SDCM<5
- High Surge Protection – 4KV
- Ripple < 5% & THD < 10%
- EMI-EMC Compliance
- Over Voltage Cut-off@ 325V
- Co-extruded polycarbonate housing
- Easy to install-External click fixing mounting arrangement


## Application

- Multi-level parking lots
- Industrial sheds
- Public areas
- Damp Areas

## Warnings and Safety

- Meant for Indoor Application Only. Should not be used in outdoor exposed to Sun and Rain.

## Dimensional drawing

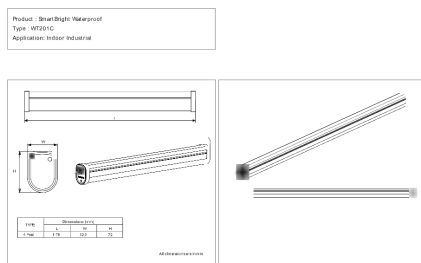

## Product details

Smartbright\_Waterproof Batten-  
WT201C



# Smartbright WT200/201 waterproof

## General Information

Driver included Yes

## Light Technical

Beam angle of light source 120 degree(s)

Color rendering index (CRI) >80

Optic type Beam angle 120°

## Operating and Electrical

Protection class IEC Safety class I

Input Voltage 140-270 V

## Controls and Dimming

Dimmable No

## Mechanical and Housing

Optical cover type Polycarbonate

Housing Color Gray

Mech. impact protection code IK08

Ingress protection code IP65

## Approval and Application

Ambient temperature range 0 to +45 °C

Flammability mark For mounting on normally flammable surfaces

## Initial Performance (IEC Compliant)

Initial chromaticity <5

## Light Technical

Order Code	Full Product Name	Correlated Color	Luminous Efficacy	
		Temperature (Nom)	(rated) (Nom)	Luminous Flux
919515812984	WT201C LED44S-6500 PSU L120 S2	6500 K	120 lm/W	4,400 lm
919515812985	WT201C LED44S-4000 PSU L120 S2	4000 K	120 lm/W	4,400 lm
919515813273	WT201C LED24S-6500 PSU L120 S2	6500 K	130 lm/W	2,400 lm
919515813274	WT201C LED24S-4000 PSU L120 S2	4000 K	130 lm/W	2,400 lm

## Operating and Electrical

Order Code	Full Product Name	Power Consumption
919515812984	WT201C LED44S-6500 PSU L120 S2	36 W
919515812985	WT201C LED44S-4000 PSU L120 S2	36 W

Order Code	Full Product Name	Power Consumption
919515813273	WT201C LED24S-6500 PSU L120 S2	18 W
919515813274	WT201C LED24S-4000 PSU L120 S2	18 W

