



Beautiful sparkle, trendy design

MASTERColour CDM-R111

The MASTERColour CDM-R111 combines the trendy look of 111 mm aluminum reflector halogen lamps with the long life, high energy efficiency and crisp white light of MASTERColour CDM.

Benefits

- Low operating costs
- Easy installation
- Relatively low heat output
- Less glare, comfort for shoppers and staff
- Reduced risk of fading

Features

- High lamp efficacy
- Long lifetime compared to incandescent and halogen lamps
- The ceramic discharge tube is optimally and stably positioned in the reflector
- Twist & Lock system
- UV-Block burner capsule
- Anti-glare cap design

Application

- Accent and decorative lighting: display lighting with sparkling, theatrical effects, even in surroundings with very high background ambient light levels like shop windows
- General lighting: in downlighters, a warm and comfortable atmosphere can be created

MASTERColour CDM-R111

Warnings and Safety


- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Versions



LPPR CDM-R111 24D 40D

Dimensional drawing



Product	D (max)	C (max)
MASTERC CDM-R111 35W/942 GX8.5 24D 1CT	111 mm	95 mm
MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6	111 mm	95 mm

MASTERColour CDM-R111

General Information	
Cap-Base	GX8.5
Operating Position	UNIVERSAL
Light Technical	
Beam Angle (Nom)	24 degree(s)
Chromaticity Coordinate X (Nom)	0.371
Chromaticity Coordinate Y (Nom)	0.366
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4200 K
Operating and Electrical	
Warm-up time to 60% light	120 s
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Reflector
Bulb Shape	R111

Order Code	Full Product Name	Switching Cycle
928096505330	MASTERC CDM-R111 35W/942 GX8.5 24D 1CT	800
928096905330	MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6	1,000

Light Technical

Order Code	Name	LLMF At End Of				
		Color	Nominal	Luminous		
		Full Product	rendering	Lifetime	Luminous Flux	Intensity (Nom)
928096505330	MASTERC CDM-R111 35W/942 GX8.5 24D 1CT	93	65 %	1,300 lm	7,350 cd	

Order Code	Name	LLMF At End Of				
		Color	Nominal	Luminous		
		Full Product	rendering	Lifetime	Luminous Flux	Intensity (Nom)
928096905330	MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6	96	60 %	2,800 lm	14,300 cd	


Operating and Electrical

Order Code	Full Product Name	Power	
		Voltage (Nom)	Consumption
928096505330	MASTERC CDM-R111 35W/942 GX8.5 24D 1CT	86 V	39.1 W

Order Code	Full Product Name	Power	
		Voltage (Nom)	Consumption
928096905330	MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6	92 V	73.2 W


Approval and Application

Order Code	Full Product Name	Energy Consumption		Mercury (Hg) Content	Mercury (Hg) Content
		kWh/1000 h		(Max)	(Nom)
		Energy	Consumption		
928096505330	MASTERC CDM-R111 35W/942 GX8.5 24D 1CT	40 kWh	2.8 mg	3.0 mg	
928096905330	MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6	74 kWh	6.6 mg	6.3 mg	

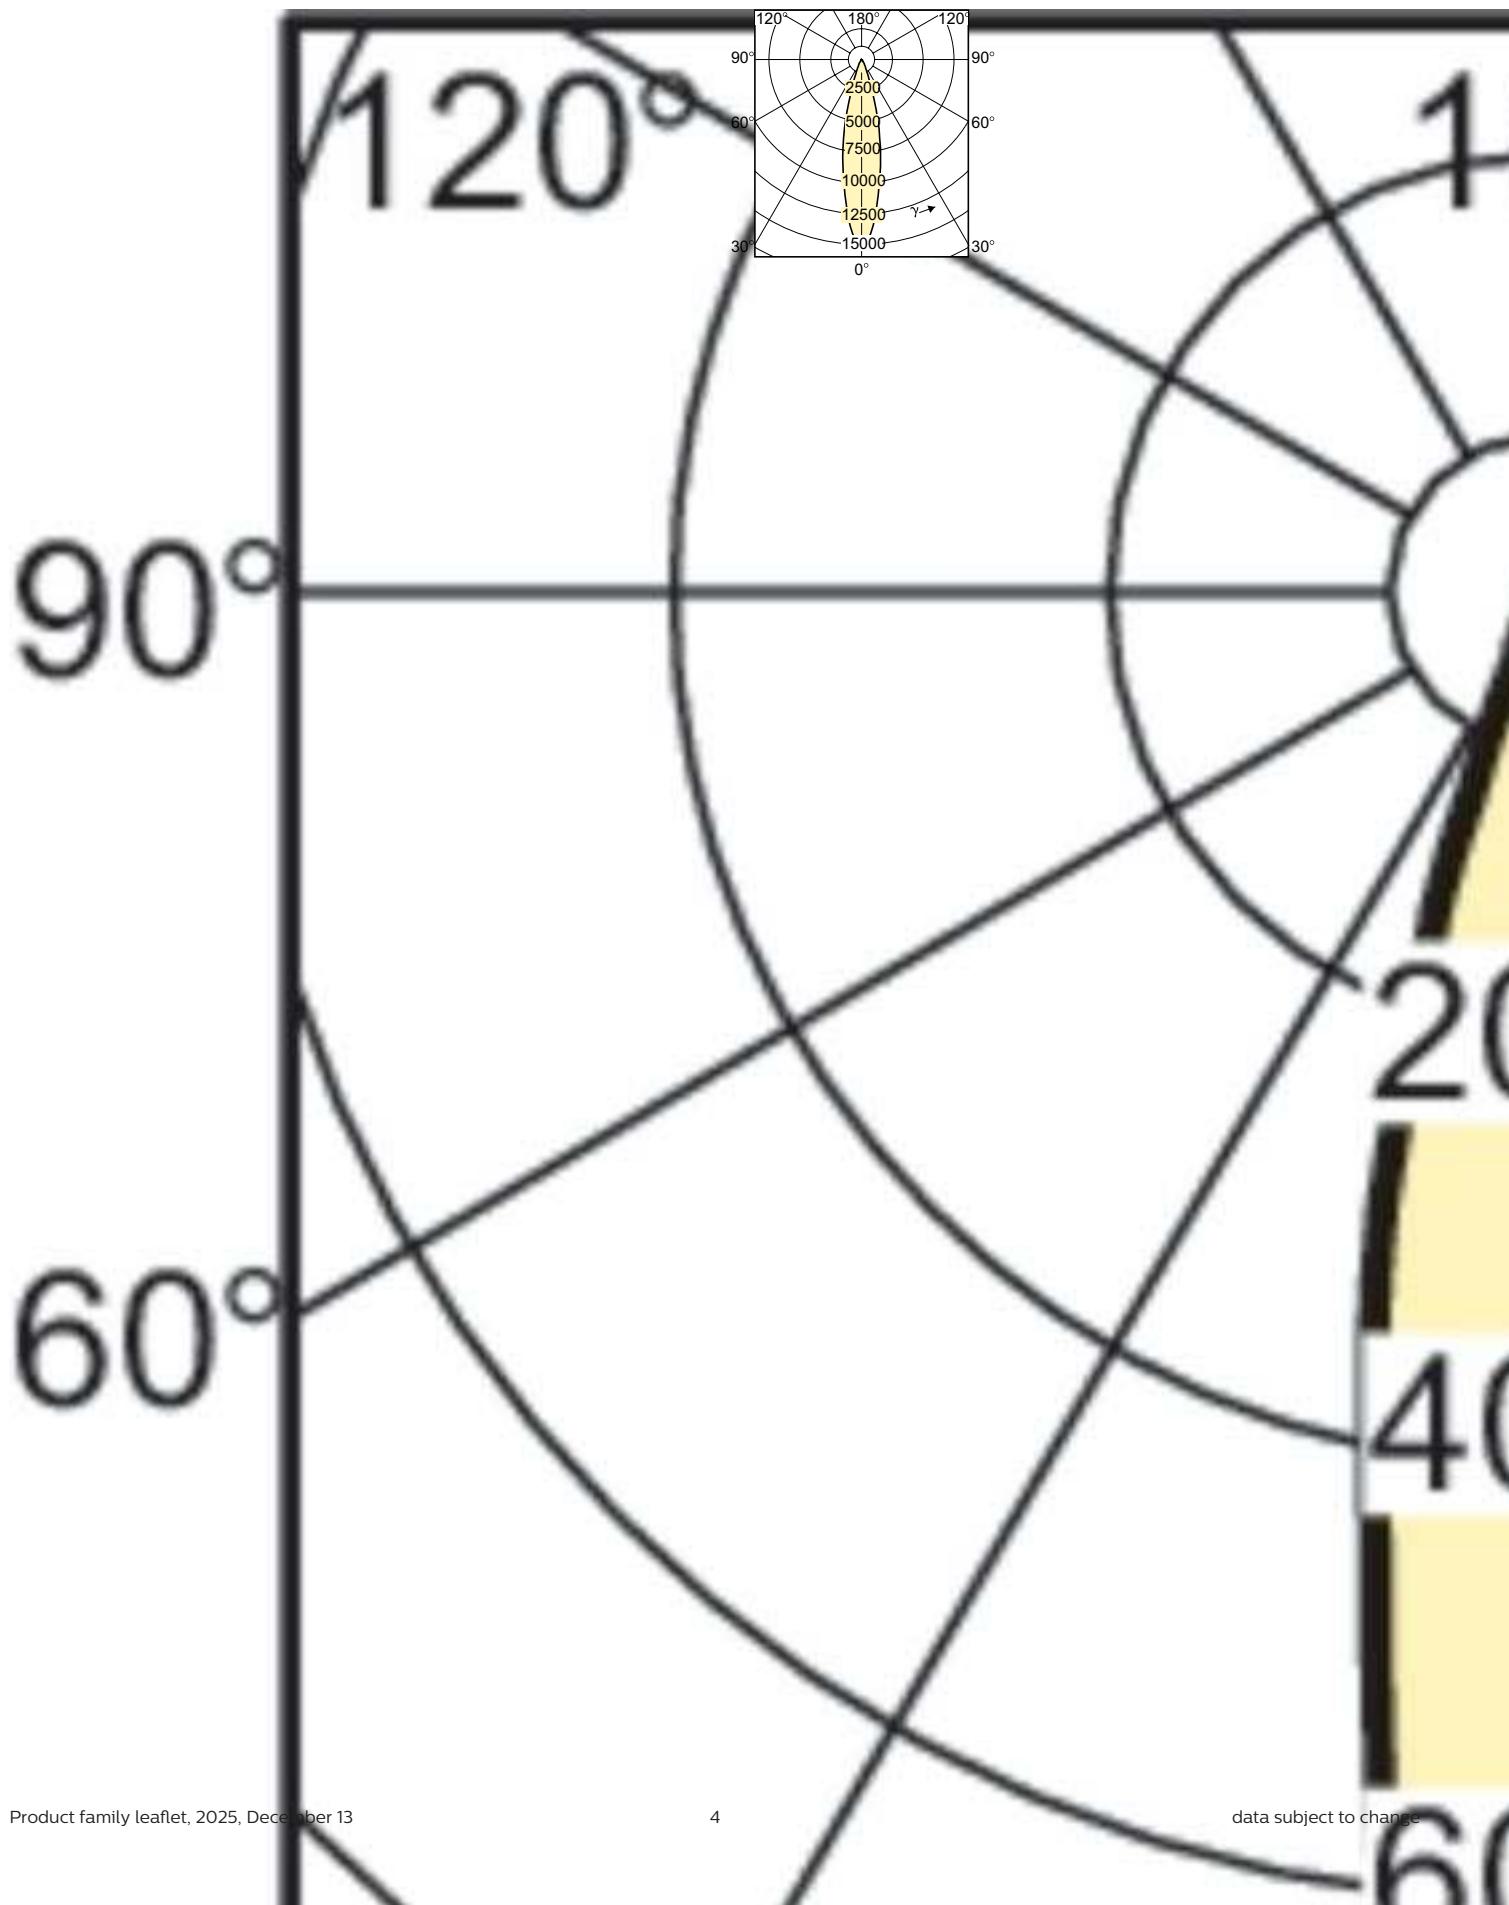


MASTERColour CDM-R111

Accent Diagrams




Accent Diagram - MASTERC CDM-R111
35W/942 GX8.5 24D 1CT




Accent Diagram - MASTERC CDM-R111
70W/942 GX8.5 24D 1CT/6

Beam Diagrams

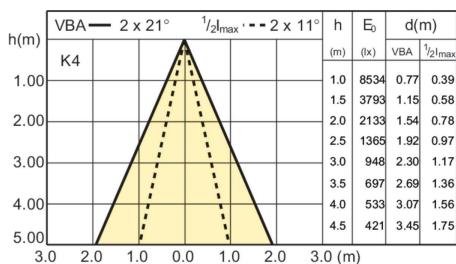

Beam diagram - MASTERC CDM-R111 35W/942
GX8.5 24D 1CT

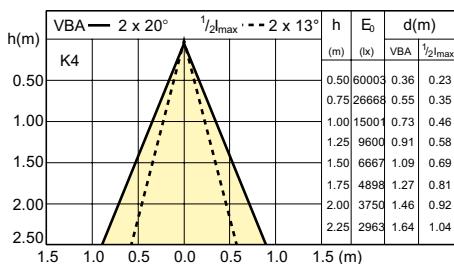

Beam diagram - MASTERC CDM-R111 70W/942
GX8.5 24D 1CT/6

