



Product Description

MASTER HPI-T Plus

Quartz metal halide lamps with clear outer bulb

Benefits

- · High safety and comfort level, maintained over life
- · Minimal maintenance cost
- Initial investment saving options with "Plus"-concept

Features

- · Clear tubular outer bulb
- Unique 3-band technology resulting in high luminous efficacy, both initially and over long lifetime
- · Renders a natural white colour appearance and good colour stability


Application

• Sports lighting. floodlighting of buildings and monuments, area lighting e.g. harbours and building sites, canopy lighting e.g. petrol stations, horticultural lighting

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing



Product	D (max)	0	L	C (max)
MASTER HPI-T Plus 250W/645 E40 1SL/12	47 mm	29 mm	155 mm	255 mm
MASTER HPI-T Plus 400W/645 E40 1SL/12	47 mm	30.5 mm	168 mm	286 mm

General Information	
Cap-Base	E40
Nominal lifetime	15,000 hour(s)
Operating Position	P20
Light Technical	
Color Designation	Cool White (CW)
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46

Light Technical


		Chromaticity	Chromaticity	Correlated Color	Color rendering	Luminous Efficacy
Order Code	Full Product Name	Coordinate X (Nom)	Coordinate Y (Nom)	Temperature (Nom)	index (CRI)	(rated) (Nom)
928481300098	MASTER HPI-T Plus 250W/645 E40	338	371	4500 K	58	73 lm/W
	1SL/12					
928481600096	MASTER HPI-T Plus 400W/645 E40	373	368	4200 K	65	83 lm/W
	1SL/12					

Operating and Electrical

			Power				Power
Order Code	Full Product Name	Voltage (Nom)	Consumption	Order Code	Full Product Name	Voltage (Nom)	Consumption
928481300098	MASTER HPI-T Plus 250W/645	128 V	247 W	928481600096	MASTER HPI-T Plus 400W/645	125 V	385 W
	E40 1SL/12				E40 1SL/12		

Approval and Application

	* *						
		Energy Consumption	Mercury (Hg)			Energy Consumption	Mercury (Hg)
Order Code	Full Product Name	kWh/1000 h	Content (Nom)	Order Code	Full Product Name	kWh/1000 h	Content (Nom)
928481300098	MASTER HPI-T Plus	272 kWh	36 mg	928481600096	MASTER HPI-T Plus	424 kWh	29.5 mg
	250W/645 E40 1SL/12				400W/645 E40 1SL/12		

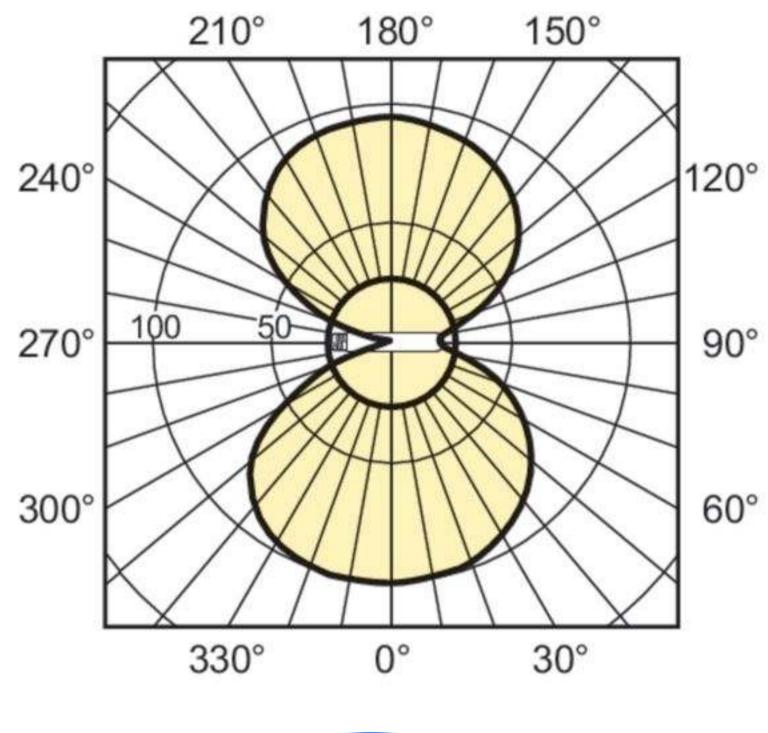



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.