

TrueLine, suspended

SP530P



Philips TrueLine suspended: True line of light

Architects need a lighting solution that matches the interior architecture of the space they are enhancing. They want a light line with elegant proportions and high light levels that offers maximum design freedom. Philips TrueLine is a flexible linear luminaire for indoor office applications that offers excellent quality with the promise of future-proof upgrades. Specifiers need luminaires that save energy, at the same time as providing the right level of light. TrueLine recessed meets both these sets of requirements. Not only is it compliant with the WELL Building Standard for Light, TrueLine surface is rated UGR<19, which is compliant with all office norms (OC). TrueLine also comes in surface and recess-mounted versions. All the luminaires in the family are available in different lengths, shapes, colors and light outputs. This offers the ultimate design flexibility and unlimited possibilities. TrueLine luminaires are also a sustainable, future-proof choice with high efficiency up to 174 lm/W and the option to upgrade to wireless connectivity and control.

Benefits

- Extremely high efficacy for a line luminaire
- Office compliant lighting
- Future-ready, scalable smart office capabilities
- Compatible with the Interact connected lighting system
- Supports sustainable building design and energy-saving subsidy criteria

Applications

- Offices
- Education
- Retail

Features

- Highly-uniform lighting with excellent glare control (UGR<19, L65<3000cd/m2)
- Best-in-class efficacy up to 174 lm/W with our Ultra efficient offering

- 3,000 K, 4,000 K and Tunable White versions, all CRI>90; Bio-up and Ultra efficient with CRI>80
- Long lifetime L90@50,000 hours
- Integrated sensors/wireless drivers for data collection, occupancy, daylight regulation and wayfinding
- Environmental Product Declaration (EPD)
- Recessed, suspended and surface-mounted options, including all accessories
- The product is IPX0 and, as such, is not protected against water ingress. Therefore, we strongly recommend that the environment in which the luminaire is to be installed is suitably checked.
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure and the product warranty will become void

Versions



TrueLine suspended-SP530P
SP532P L1130 ALU



TrueLine-SP530 L570 WH



TrueLine-SP530 L2810 Alu




TrueLine-SP530 L2810 WH




TrueLine Suspended black
housing


Dimensional drawing

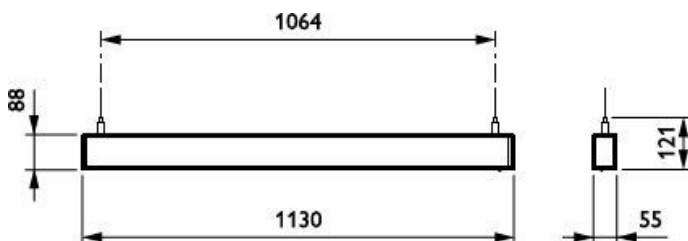


SP532P 36S/940 DEIA L1130 SM2 ALU

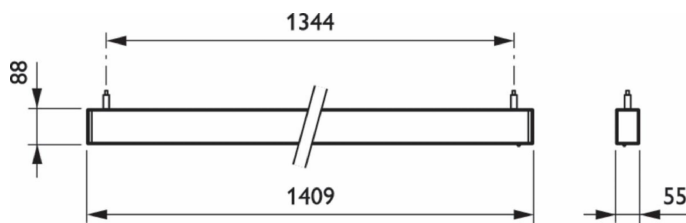


SP532P 47S/940 DEIA SM2 L1410 BK

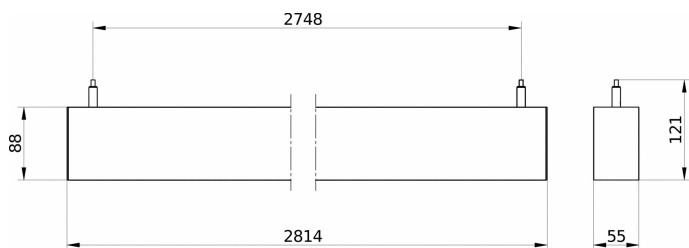

SP532P 94S/940 DEIA SM2 L2810 WH

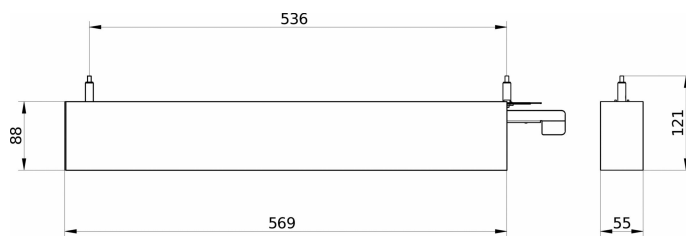

SP531P 7S/940 DEIA LE SM2 L570 WH

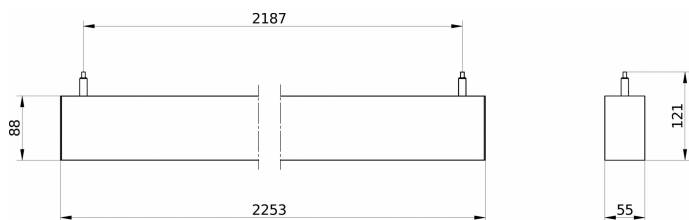

SP533P 82S/940 DEIA SM2 L2250 ALU

Product details



TrueLine_Suspended-line-side-view



TrueLine_Suspended-line-top-view



TrueLine Suspended black housing



TrueLine_Suspended-top-view



TrueLine_Suspended-U0



TrueLine Suspended-SP530P-LF-power-cable-03



TrueLine Suspended black housing



TrueLine_SM_SP-line-connectio-side-view-2

General Information

Number of gear units	Unit
Driver included	Yes
Service Tag	Yes

Light Technical

Correlated Colour Temperature (Nom)	4000 K
Colour rendering index (CRI)	>90
Beam angle of light source	120 degree(s)
Optic type	Wide beam

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Suitable for random switching	No
Protection class IEC	Safety class I

Controls and Dimming

Dimmable	Yes
Maximum dim level	1%

Mechanical and Housing

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.35 J reinforced]

Emergency Operation

Central Emergency	Yes
Emergency lighting	DC operated central emergency lighting

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Flickering value (PstLM)	1
Stroboscopic effect	0.4
Ambient temperature range	+10 to +40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <3

Light Technical

Order Code	Full Product Name	Luminous Flux	Luminous efficacy (rated) (nom.)
910505106142	SP533P 41S/940 DEIA SM2 L1130 ALU	4,100 lm	115 lm/W
910505106150	SP532P 36S/940 DEIA L1130 SM2 ALU	3,600 lm	136 lm/W
910505106152	SP530P 34S/940 DEIA SM2 L1130 ALU	3,400 lm	139 lm/W
910505106194	SP531P 7S/940 DEIA LE SM2 L570 WH	700 lm	103 lm/W
910505106207	SP533P 82S/940 DEIA SM2 L2250 ALU	8,200 lm	119 lm/W
910505106211	SP532P 94S/940 DEIA SM2 L2810 WH	9,400 lm	140 lm/W
910505106174	SP532P 47S/940 DEIA SM2 L1410 BK	4,700 lm	138 lm/W
910505106176	SP530P 34S/940 DEIA SM2 L1130 BK	3,400 lm	139 lm/W

Operating and Electrical

Order Code	Full Product Name	Power Consumption
910505106142	SP533P 41S/940 DEIA SM2 L1130 ALU	35.5 W
910505106150	SP532P 36S/940 DEIA L1130 SM2 ALU	26.5 W
910505106152	SP530P 34S/940 DEIA SM2 L1130 ALU	24.5 W
910505106194	SP531P 7S/940 DEIA LE SM2 L570 WH	7.2 W
910505106207	SP533P 82S/940 DEIA SM2 L2250 ALU	69 W
910505106211	SP532P 94S/940 DEIA SM2 L2810 WH	67 W
910505106174	SP532P 47S/940 DEIA SM2 L1410 BK	34 W
910505106176	SP530P 34S/940 DEIA SM2 L1130 BK	24.5 W


Mechanical and Housing

Order Code	Full Product Name	Housing Colour
910505106142	SP533P 41S/940 DEIA SM2 L1130 ALU	Aluminium
910505106150	SP532P 36S/940 DEIA L1130 SM2 ALU	Aluminium
910505106152	SP530P 34S/940 DEIA SM2 L1130 ALU	Aluminium
910505106194	SP531P 7S/940 DEIA LE SM2 L570 WH	White
910505106207	SP533P 82S/940 DEIA SM2 L2250 ALU	Aluminium
910505106211	SP532P 94S/940 DEIA SM2 L2810 WH	White
910505106174	SP532P 47S/940 DEIA SM2 L1410 BK	Black
910505106176	SP530P 34S/940 DEIA SM2 L1130 BK	Black


Product Data

Order Code	Full Product Name	Product family code
910505106142	SP533P 41S/940 DEIA SM2 L1130 ALU	SP533P
910505106150	SP532P 36S/940 DEIA L1130 SM2 ALU	SP532P
910505106152	SP530P 34S/940 DEIA SM2 L1130 ALU	SP530P
910505106194	SP531P 7S/940 DEIA LE SM2 L570 WH	SP531P
910505106207	SP533P 82S/940 DEIA SM2 L2250 ALU	SP533P
910505106211	SP532P 94S/940 DEIA SM2 L2810 WH	SP532P
910505106174	SP532P 47S/940 DEIA SM2 L1410 BK	SP532P
910505106176	SP530P 34S/940 DEIA SM2 L1130 BK	SP530P


Polar normal diagrams

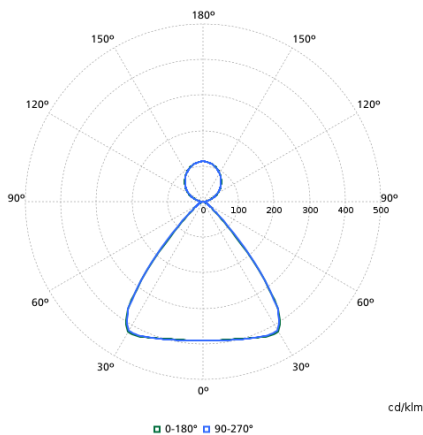


SP530PI - 910505106150

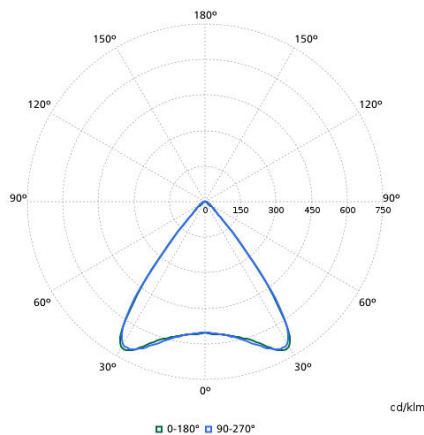


SP530PI - 910505106152

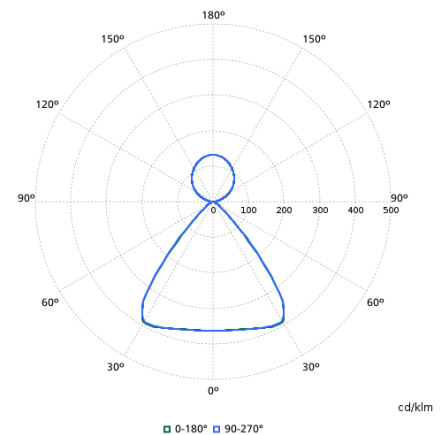


SP530PI - 910505106174

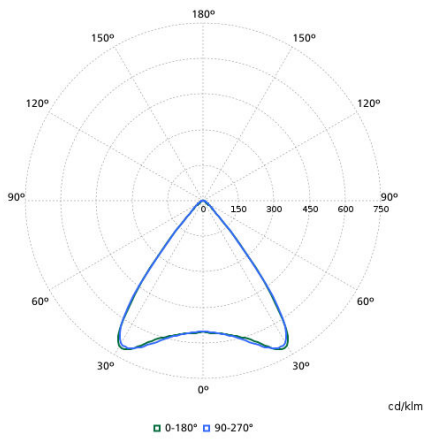


SP530PI - 910505106176

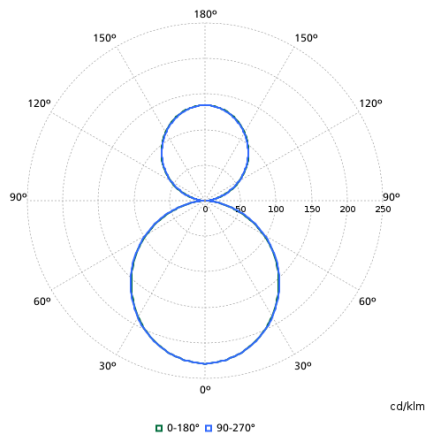


SP530PI - 910505106207

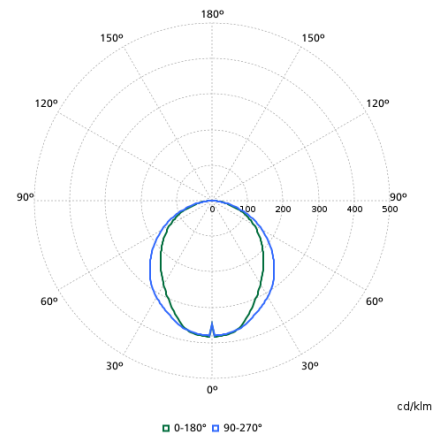

SP530PI - 910505106194

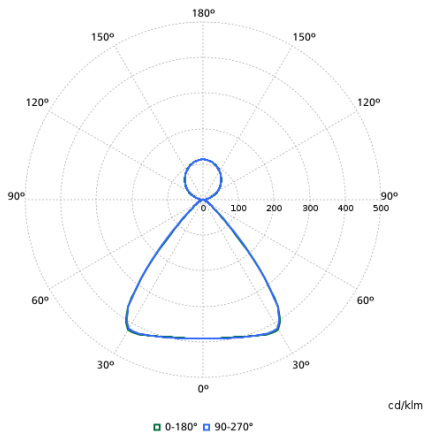

SP530PI - 910505106211

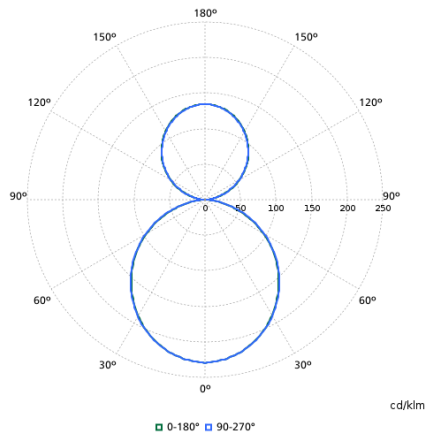

SP530PI - 910505106142