



A small and sustainable projector in a sleek, subtle design

GreenSpace Evo Mini

GreenSpace Evo Mini is a sustainable lighting projector that comes with a sleek and subtle design. This makes the projector an ideal choice for hospitality and fashion retail applications. The 3D printed housing is crafted from at least 65% recycled or bio-circular materials, while the heatsink is made from 85% recycled aluminium. Because of its circular design, the luminaire is upgradable, reusable, fully serviceable and recyclable. Combined with the high energy efficiency, this makes the GreenSpace Evo Mini a sustainable projector choice. The new PerfectAccent deep reflectors ensure a light effect with increased sparkle and improved shopper eye comfort. Further customisation of colours and textures is possible via Philips MyCreation

Benefits

- The sleek and subtle design fits perfectly in any installation
- More sparkle and enhanced shopper eye comfort with PerfectAccent deep reflectors
- Extend the useful life of the product with easy serviceability and upgradeability
- The recycled materials and high energy efficiency help further reduce the carbon footprint of the product

GreenSpace Evo Mini

Features

- Toolless access to the optics, LED and front glass
- Serviceable and upgradeable with standard tools
- Reduced carbon footprint due to high efficacy
- Equipped with state-of-the-art PerfectAccent deep reflectors
- Very broad aiming flexibility, including upward lighting
- Connectivity options: Interact compatible DALI (DIA) and Wireless (WIA)
- Optional front glass (recommended for dusty environments)

Application

- Fashion
- Hospitality
- Residential

Warnings and Safety

- Cleaning of the optic should only be done with pressurized air. Touching the LED or reflector is forbidden. For food preparation areas and areas with high levels of dust, the use of the optional front glass is strongly advised, as it can be cleaned with a (dry) microfiber cloth
- During maintenance, the product must be switched off and cooled down
- The product must be installed out of arm's reach. Manipulating the product when hot is only possible with an insulated glove

Versions



ST332T GreenSpace Evo Mini
black



ST332X2 GreenSpace Evo Mini
double spothead for Coreline
trunking, white




ST332T GreenSpace Evo Mini
white



ST332X2 GreenSpace Evo Mini
double spothead for Maxos fusion,
white

GreenSpace Evo Mini

Dimensional drawing

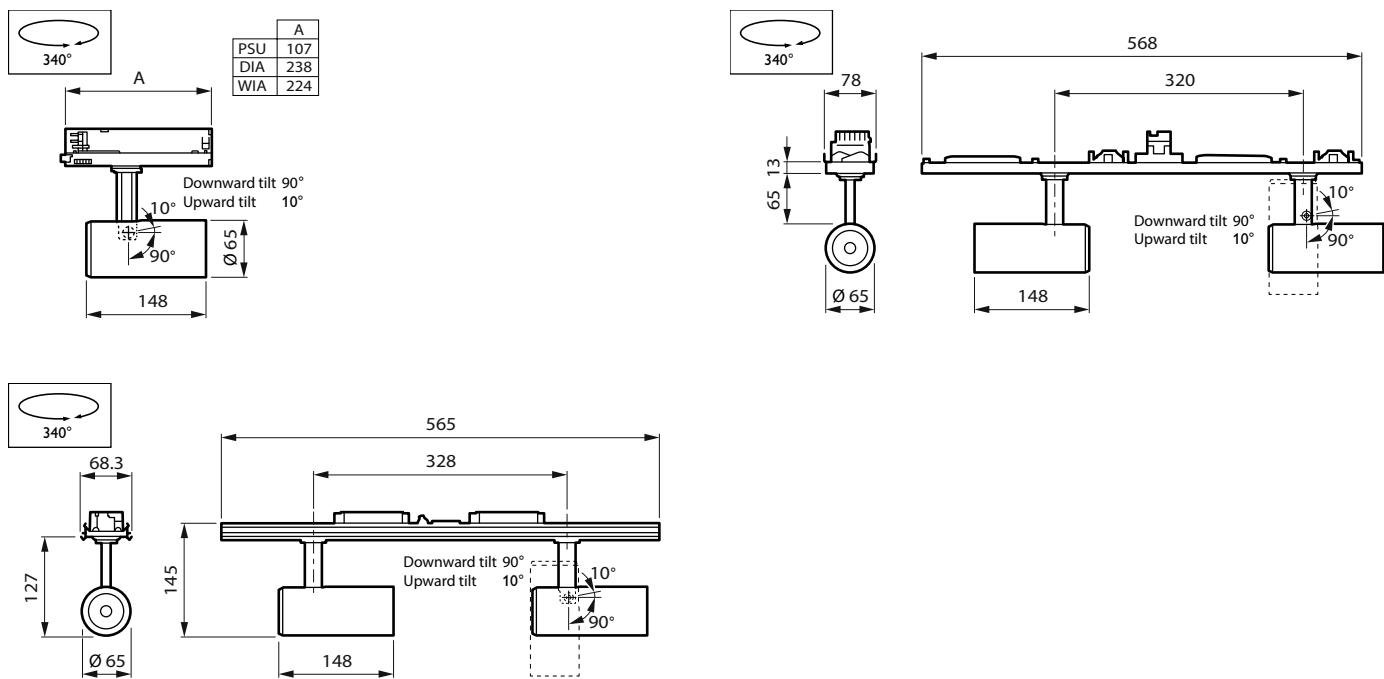

Product details



GreenSpace Evo Mini is fully serviceable



ST332T GreenSpace Evo Mini white



ST332T GreenSpace Evo Mini black

GreenSpace Evo Mini

General Information	
Driver included	Yes
Light Technical	
Optic type	High-reflective metal reflector
	Medium beam 20 to 40 degrees
Operating and Electrical	
Protection class IEC	Safety class II
Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Suitable for random switching	Not applicable
Mechanical and Housing	
Mech. impact protection code	IK02
Ingress protection code	IP20
Emergency Operation	
Central Emergency	No
Approval and Application	
Ambient temperature range	+10 to +35 °C
CE mark	Yes
ENEC mark	ENEC mark
Flammability mark	-
Glow-wire test	Temperature 650 °C, duration 30 s
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%

General Information

Order Code	Full Product Name	Number of gear units	Service Tag
59020500	ST332T 22S/PC930 PSU HMB FG BK482	Unit	Yes
59023600	ST332T 27S/PW930 PSU HWB BK482	Unit	Yes
59031100	ST332Y2 27S/PW930 PSU HWB WH481	2 units	-
59021200	ST332T 27S/830 PSU HWB WH481	Unit	Yes
59025000	ST332T 27S/PW930 WIA HMB WH481	Unit	Yes
59028100	ST332X2 27S/PW940 PSU HWB WH481	2 units	-

Light Technical

Order Code	Name	Correlated		Luminous	
		Colour	Colour rendering	efficacy (rated)	Luminous flux
Full Product	Temperature (Nom)	index (CRI)	(nom.)		
59020500	ST332T 22S/PC930 PSU HMB FG BK482	3000 K	>90	118 lm/W	2,200 lm
59023600	ST332T 27S/PW930 PSU HWB BK482	3000 K	>90	121 lm/W	2,700 lm
59031100	ST332Y2 27S/PW930 PSU HWB WH481	3000 K	>90	121 lm/W	5,400 lm

Order Code	Name	Correlated		Luminous	
		Colour	Colour rendering	efficacy (rated)	Luminous flux
Full Product	Temperature (Nom)	index (CRI)	(nom.)		
59021200	ST332T 27S/830 PSU HWB WH481	3000 K	≥80	126 lm/W	2,800 lm
59025000	ST332T 27S/PW930 WIA HMB WH481	3000 K	>90	112 lm/W	2,700 lm
59028100	ST332X2 27S/PW940 PSU HWB WH481	4000 K	>90	124 lm/W	5,600 lm

Operating and Electrical

GreenSpace Evo Mini

Order Code	Full Product Name	Power Consumption
59020500	ST332T 22S/PC930 PSU HMB FG BK482	18.8 W
59023600	ST332T 27S/PW930 PSU HWB BK482	20.7 W
59031100	ST332Y2 27S/PW930 PSU HWB WH481	44.6 W

Order Code	Full Product Name	Power Consumption
59021200	ST332T 27S/830 PSU HWB WH481	20.7 W
59025000	ST332T 27S/PW930 WIA HMB WH481	24 W
59028100	ST332X2 27S/PW940 PSU HWB WH481	44.6 W

Controls and Dimming

Order Code	Full Product Name	Dimmable
59020500	ST332T 22S/PC930 PSU HMB FG BK482	No
59023600	ST332T 27S/PW930 PSU HWB BK482	No
59031100	ST332Y2 27S/PW930 PSU HWB WH481	No

Order Code	Full Product Name	Dimmable
59021200	ST332T 27S/830 PSU HWB WH481	No
59025000	ST332T 27S/PW930 WIA HMB WH481	Yes
59028100	ST332X2 27S/PW940 PSU HWB WH481	No

Mechanical and Housing

Order Code	Full Product Name	Housing Colour
59020500	ST332T 22S/PC930 PSU HMB FG BK482	Black
59023600	ST332T 27S/PW930 PSU HWB BK482	Black
59031100	ST332Y2 27S/PW930 PSU HWB WH481	White

Order Code	Full Product Name	Housing Colour
59021200	ST332T 27S/830 PSU HWB WH481	White
59025000	ST332T 27S/PW930 WIA HMB WH481	White
59028100	ST332X2 27S/PW940 PSU HWB WH481	White

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial chromaticity
59020500	ST332T 22S/PC930 PSU HMB FG BK482	(0.422, 0.386) SDCM <2
59023600	ST332T 27S/PW930 PSU HWB BK482	(0.422, 0.386) SDCM <2
59031100	ST332Y2 27S/PW930 PSU HWB WH481	(0.422, 0.386) SDCM <2


Order Code	Full Product Name	Initial chromaticity
59021200	ST332T 27S/830 PSU HWB WH481	(0.434, 0.403) SDCM <3
59025000	ST332T 27S/PW930 WIA HMB WH481	(0.422, 0.386) SDCM <2
59028100	ST332X2 27S/PW940 PSU HWB WH481	(0.374, 0.364) SDCM <2

Product Data


Order Code	Full Product Name	Product family code
59020500	ST332T 22S/PC930 PSU HMB FG BK482	ST332T
59023600	ST332T 27S/PW930 PSU HWB BK482	ST332T
59031100	ST332Y2 27S/PW930 PSU HWB WH481	ST332Y2

Order Code	Full Product Name	Product family code
59021200	ST332T 27S/830 PSU HWB WH481	ST332T
59025000	ST332T 27S/PW930 WIA HMB WH481	ST332T
59028100	ST332X2 27S/PW940 PSU HWB WH481	ST332X2


Polar Wide Diagrams



Polar Normal (separate) - ST332T - 910505104529




Polar Normal (separate) - ST332T - 910505104527




Polar Normal (separate) - ST332T - 910505104525

GreenSpace Evo Mini


Polar Wide Diagrams



Polar Normal (separate) - ST332TI -
910505104524



Polar Normal (separate) - ST332TI -
910505104535



Polar Normal (separate) - ST332TI -
910505104532

