



# Long life T12 lamp for explosion free environments

## TL-X XL

The TL-X XL lamp (tube diameter 38 mm) has an extended lifetime and is fitted with an internal ignition strip for electromagnetic starterless operation or high-frequency non-preheat operation. In combination with a special lampholder, all possible sparking effects during ignition are eliminated. This lamp is used in flameproof and increased-safety luminaires for both indoor and outdoor applications, such as the (petro-)chemical industry, offshore, mines and any location where traces of explosive gases may be found.

### Benefits

- In combination with a special lampholder all possible sparking effects during ignition are eliminated
- Extended lifetime compared with standard TL lamps

### Features

- Provided with internal ignition strip for EM starterless operation or HF Non-preheat operation
- Special Fa6 lamp cap has a long and thick pin, requiring a special lampholder

### Application

- Used in flameproof and increased-safety luminaires for both indoor and outdoor applications
- Used in applications like (petro-)chemical industry, offshore, mines and any locations where traces of explosive gases may be found

## TL-X XL

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Versions



LPPR TL-X

### Dimensional drawing

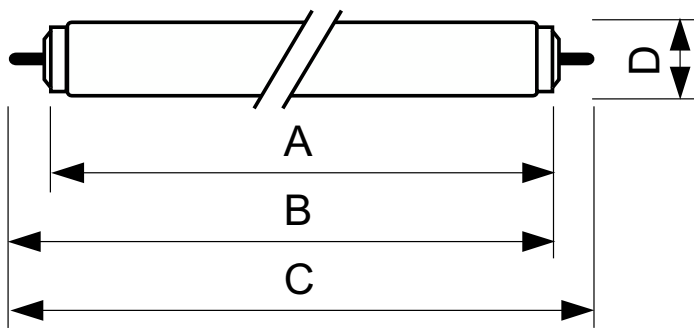

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-X XL 40W/33-640 SLV/25	40.5 mm	1,183.5 mm	1,202 mm	1,198.5 mm	1,220.5 mm

