Sophisticated yet simple energy-efficient lighting solutions

Dynalite Integration Devices

Within any modern project, many third-party systems can be found performing different roles. Each separate system may use a different protocol for communication. Philips Dynalite has developed a range of gateway devices that can be used to synchronize these systems' functions into one integrated system solution. By utilizing the correct gateway, different systems can be integrated, allowing end-users access to a fully automated site from one interface. By successfully integrating third-party systems with a Dynalite solution, repetitive end-user interaction is reduced.

Benefits
- Reduces repetitive end-user interaction
- Allows access to fully automated site from one interface

Features
- A range of different gateways provides different integration opportunities and network management options

Application
- Depends on the lighting system in which the controls are used

Dynalite Integration Devices

Versions

DPMI940-DALI Dry Contact Interface

Product photo IRT9090_01

SlimBlend SR-RC400B VPC ACL

PDEG Ethernet Gateway

Dynalite PDEB Ethernet Bridge integration device

Dimensional drawing

38 mm (1.49 in)

106 mm (4.17 in)

99 mm (3.89 in)

PHILIPS

110 mm (4.33 in)

59 mm (2.3 in)

95 mm (3.8 in)

105 mm (4.1 in)

75 mm (2.9 in)
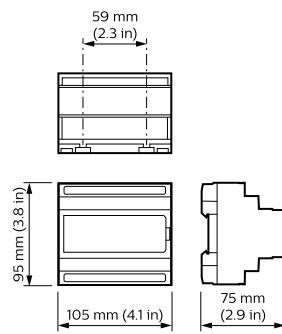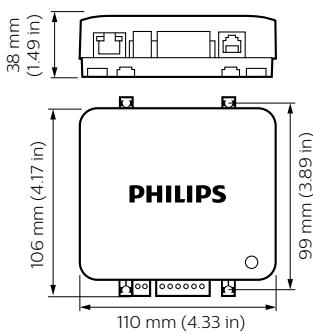
Dynalite Integration Devices

Dimensional drawing

165 mm
(6.50 in)

18 mm (0.71 in)

53 mm (2.09 in)   34 mm (1.34 in)

38 mm (1.49 in)

106 mm (4.17 in)

PHILIPS

99 mm (3.89 in)

110 mm (4.33 in)

59 mm (2.32 in)

95 mm (3.74 in)

105 mm (4.13 in)   75 mm (2.95 in)

59 mm (2.32 in)

95 mm (3.74 in)

105 mm (4.13 in)   75 mm (2.95 in)
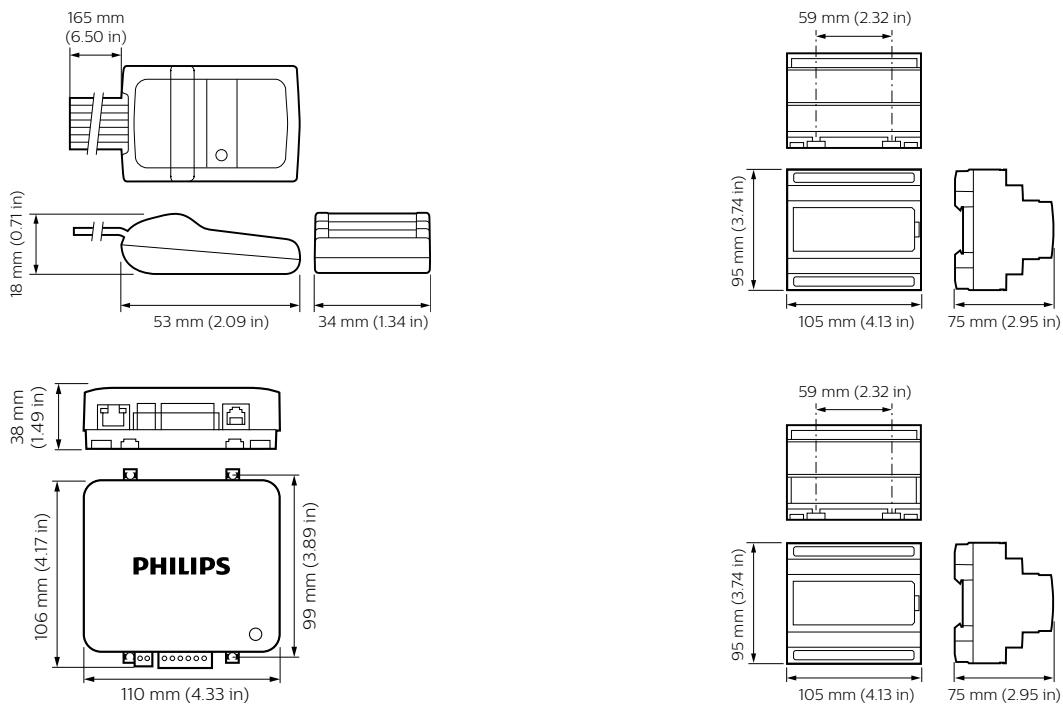
Product details

Front of the PDEG Ethernet Gateway

DDMIDC8 Low Level Input Integrator front

DDNG-KNX Front

Front image of the PDEB Ethernet Bridge integration device

Dynalite Integration Devices

www.lighting.philips.com

2023, August 2 – data subject to change