

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

DigiStreet BGP763

Signify N.V.



## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	<a href="https://www.signify.com/global">https://www.signify.com/global</a>

### EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Electrical product
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

### PRODUCT

Product name	DigiStreet Large
Additional labels	BGP763 LED300-/740 I DW50 DGR 62
Product reference	910925866249
Place of production	Poland
Period for data	2022
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	Not applicable

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit of 25200 lumens over 100000 hours
Declared unit mass	13.527 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	2,58E+02
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	2,57E+02
Secondary material, inputs (%)	6.51
Secondary material, outputs (%)	48.3
Total energy use, A1-A3 (kWh)	772
Total water use, A1-A3 (m <sup>3</sup> e)	1.31

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people’s lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

### PRODUCT DESCRIPTION

Developed with the aim to become your long term partner. The system ready architecture of DigiStreet enables you to enjoy the benefits of connected lighting systems today and also gets the city ready for the innovations to come!. Its two sockets enable you to connect directly to the CityTouch system and is also prepared to connect you to the future innovations of IoT. Next to this, each individual luminaire is uniquely identifiable, than ks to the Service tag application. With a simple scan of a QR code, placed on the inside of the mast door, you gain instant access to the luminaire configuration, making maintenance and programming operations faster and easier, no matter what stage of the luminaire’s lifetime. Digistreet is also equipped with dedicated light recipes that: 1) maintain an optimal ecosystems for bats or 2) preserve a dark night sky.

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	63.86	EUR, ASIA

DigiStreet Large-BGP763

Minerals	14.24	APAC , EU
Fossil materials	21.9	EUR, ASIA
Bio-based materials	0	Not applicable

### BIOGENIC CARBON CONTENT

Product’s biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.017

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Product
Mass per declared unit	13.527 kg
Functional unit	1 unit of 25200 lumens over 100000 hours
Reference service life	100000 hours

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x			x
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not relevant = MNR.

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible for the production of the studied luminaire.

DigiStreet Large-BGP763

Thus, it is possible to allocate it according to the weight of the product analysed in this study. Some of the wastes are due to ancillary materials used during manufacturing while the rest is due to material losses.

## TRANSPORT AND INSTALLATION (A4-A5)

Transport distances were calculated on the base of the supplier location and manufacturing location and then made a cumulative group choosing the conservative scenario. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

## PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity from Europe's electricity grid mix (B6). The total power consumption of the reference product is calculated as follows: Wattage x Reference lifetime = kWh consumed throughout the entire use phase B6.

## PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat

production (D). The benefits and loads of incineration and recycling are included in Module D.

# SYSTEM BOUNDARY

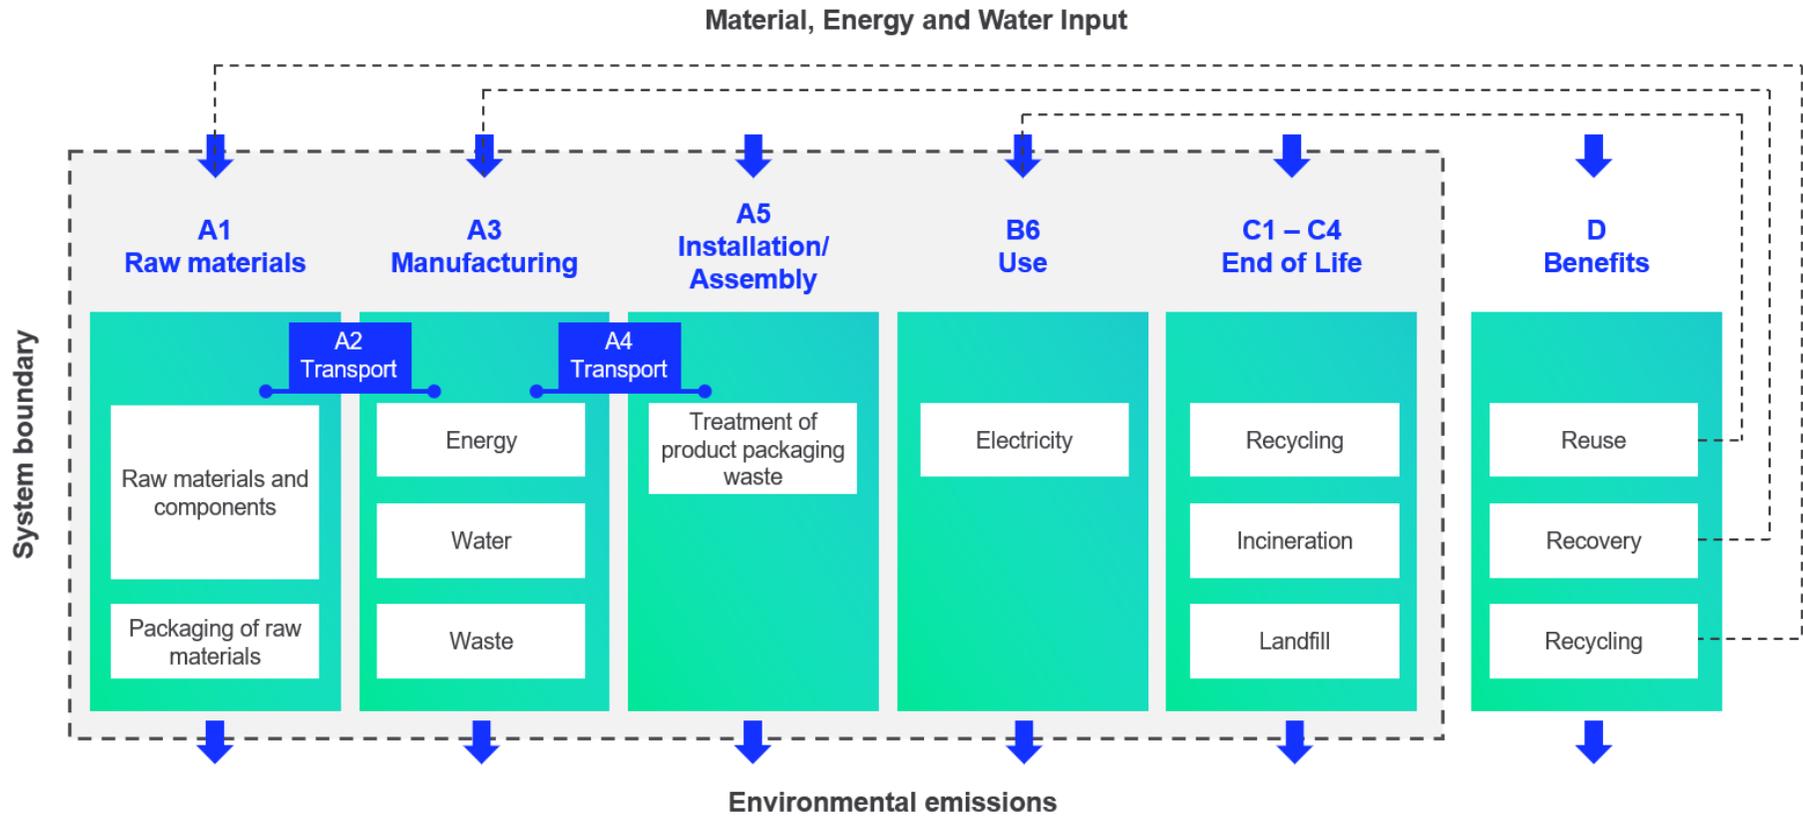

## LIFE-CYCLE ASSESSMENT

### CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

### ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
No allocation	No allocation
No allocation	Allocated by mass or volume
Allocated by mass or volume	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

### AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. EcoInvent 3.8 database was used as the source of environmental data.

# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	2,53E+02	2,59E+00	1,21E+00	2,57E+02	2,59E+00	4,75E-01	MNR	MNR	MNR	MNR	MNR	6,97E+03	MNR	MNR	1,60E-01	2,68E+00	1,88E+00	-1,08E+02
GWP – fossil	kg CO <sub>2</sub> e	2,54E+02	2,59E+00	1,27E+00	2,58E+02	2,58E+00	4,16E-01	MNR	MNR	MNR	MNR	MNR	6,96E+03	MNR	MNR	1,60E-01	2,68E+00	1,88E+00	-1,08E+02
GWP – biogenic	kg CO <sub>2</sub> e	-9,60E-01	0,00E+00	-5,92E-02	-1,02E+00	9,99E-04	5,94E-02	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	-1,63E-02
GWP – LULUC	kg CO <sub>2</sub> e	3,74E-01	1,12E-03	1,38E-03	3,77E-01	9,53E-04	2,16E-06	MNR	MNR	MNR	MNR	MNR	1,63E+01	MNR	MNR	5,90E-05	2,44E-04	1,83E-04	-9,72E-03
Ozone depletion pot.	kg CFC <sub>11</sub> e	2,37E-05	5,80E-07	1,32E-07	2,44E-05	5,94E-07	6,03E-10	MNR	MNR	MNR	MNR	MNR	3,53E-04	MNR	MNR	3,68E-08	2,23E-08	2,18E-08	-2,91E-06
Acidification potential	mol H <sup>+</sup> e	1,76E+00	2,41E-02	4,35E-03	1,78E+00	1,09E-02	9,44E-05	MNR	MNR	MNR	MNR	MNR	3,97E+01	MNR	MNR	6,77E-04	2,34E-03	1,14E-03	-1,11E+00
EP-freshwater <sup>2)</sup>	kg Pe	1,02E-02	1,90E-05	2,74E-05	1,03E-02	2,12E-05	7,90E-08	MNR	MNR	MNR	MNR	MNR	7,37E-01	MNR	MNR	1,31E-06	7,72E-06	1,11E-05	-6,86E-03
EP-marine	kg Ne	2,62E-01	6,38E-03	9,50E-04	2,69E-01	3,25E-03	4,78E-05	MNR	MNR	MNR	MNR	MNR	5,27E+00	MNR	MNR	2,01E-04	6,45E-04	2,47E-03	-1,21E-01
EP-terrestrial	mol Ne	2,89E+00	7,07E-02	9,60E-03	2,97E+00	3,59E-02	4,83E-04	MNR	MNR	MNR	MNR	MNR	5,99E+01	MNR	MNR	2,22E-03	7,09E-03	3,97E-03	-1,40E+00
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	8,61E-01	2,01E-02	4,18E-03	8,86E-01	1,15E-02	1,17E-04	MNR	MNR	MNR	MNR	MNR	1,64E+01	MNR	MNR	7,10E-04	1,86E-03	1,45E-03	-4,04E-01
ADP-minerals & metals <sup>4)</sup>	kg Sbe	7,64E-03	5,62E-06	6,25E-06	7,65E-03	6,06E-06	2,19E-08	MNR	MNR	MNR	MNR	MNR	6,49E-02	MNR	MNR	3,75E-07	1,71E-05	4,67E-07	-1,59E-03
ADP-fossil resources	MJ	2,59E+03	3,77E+01	2,60E+01	2,66E+03	3,88E+01	6,85E-02	MNR	MNR	MNR	MNR	MNR	1,48E+05	MNR	MNR	2,40E+00	2,42E+00	2,09E+00	-1,05E+03
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	5,48E+01	1,60E-01	5,59E-01	5,55E+01	1,74E-01	1,63E-02	MNR	MNR	MNR	MNR	MNR	4,05E+03	MNR	MNR	1,07E-02	1,33E-01	1,31E-01	-7,41E+00

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO<sub>4</sub>e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1,94E-05	2,59E-07	5,28E-08	1,97E-05	2,98E-07	5,75E-10	MNR	MNR	MNR	MNR	MNR	1,31E-04	MNR	MNR	1,84E-08	2,66E-08	1,64E-08	-5,94E-06
Ionizing radiation <sup>6)</sup>	kBq U235e	8,27E+00	1,79E-01	6,06E-02	8,51E+00	1,85E-01	1,35E-04	MNR	MNR	MNR	MNR	MNR	4,01E+03	MNR	MNR	1,14E-02	1,40E-02	1,09E-02	-6,32E+00

Ecotoxicity (freshwater)	CTUe	9,39E+03	3,24E+01	1,92E+01	9,44E+03	3,49E+01	2,16E-01	MNR	MNR	MNR	MNR	MNR	1,01E+05	MNR	MNR	2,16E+00	1,39E+01	7,46E+02	-2,36E+03
Human toxicity, cancer	CTUh	3,32E-07	9,82E-10	6,72E-10	3,33E-07	8,58E-10	2,24E-11	MNR	MNR	MNR	MNR	MNR	3,30E-06	MNR	MNR	5,31E-11	4,79E-10	1,75E-09	-2,24E-09
Human tox. non-cancer	CTUh	7,69E-06	3,07E-08	9,92E-09	7,73E-06	3,46E-08	1,37E-09	MNR	MNR	MNR	MNR	MNR	1,08E-04	MNR	MNR	2,14E-09	1,96E-08	7,92E-08	-2,57E-06
SQP <sup>7)</sup>	-	7,63E+02	3,75E+01	7,32E+00	8,08E+02	4,47E+01	2,16E-02	MNR	MNR	MNR	MNR	MNR	2,68E+04	MNR	MNR	2,77E+00	3,78E+00	3,09E+00	-2,11E+02

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

## USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	1,98E+02	3,99E-01	1,02E+01	2,08E+02	4,37E-01	1,45E-03	MNR	MNR	MNR	MNR	MNR	3,01E+04	MNR	MNR	2,71E-02	3,10E-01	8,89E-02	-1,67E+01
Renew. PER as material	MJ	1,06E+01	0,00E+00	5,51E-01	1,11E+01	0,00E+00	-5,51E-01	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	-6,56E-01	-1,22E+00	0,00E+00
Total use of renew. PER	MJ	2,08E+02	3,99E-01	1,08E+01	2,19E+02	4,37E-01	-5,50E-01	MNR	MNR	MNR	MNR	MNR	3,01E+04	MNR	MNR	2,71E-02	-3,46E-01	-1,13E+00	-1,67E+01
Non-re. PER as energy	MJ	2,51E+03	3,77E+01	1,70E+01	2,57E+03	3,88E+01	6,86E-02	MNR	MNR	MNR	MNR	MNR	1,48E+05	MNR	MNR	2,40E+00	2,42E+00	2,09E+00	-1,05E+03
Non-re. PER as material	MJ	7,11E+01	0,00E+00	8,51E+00	7,96E+01	0,00E+00	-8,51E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	-2,66E+01	-2,76E+01	0,00E+00
Total use of non-re. PER	MJ	2,59E+03	3,77E+01	2,55E+01	2,65E+03	3,88E+01	-8,45E+00	MNR	MNR	MNR	MNR	MNR	1,48E+05	MNR	MNR	2,40E+00	-2,42E+01	-2,55E+01	-1,05E+03
Secondary materials	kg	8,81E-01	1,15E-02	3,86E-02	9,31E-01	1,08E-02	9,39E-05	MNR	MNR	MNR	MNR	MNR	1,52E+01	MNR	MNR	6,67E-04	2,35E-03	4,38E-03	4,39E+00
Renew. secondary fuels	MJ	1,71E-01	9,64E-05	8,66E-03	1,79E-01	1,09E-04	5,20E-07	MNR	MNR	MNR	MNR	MNR	1,24E-01	MNR	MNR	6,73E-06	1,17E-04	3,87E-05	-2,58E-03
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m <sup>3</sup>	1,30E+00	4,50E-03	1,37E-02	1,31E+00	5,03E-03	4,65E-05	MNR	MNR	MNR	MNR	MNR	1,27E+02	MNR	MNR	3,11E-04	4,70E-03	2,85E-03	-3,40E-01

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	4,48E+01	5,02E-02	6,29E-02	4,49E+01	5,15E-02	4,36E-04	MNR	MNR	MNR	MNR	MNR	5,31E+02	MNR	MNR	3,18E-03	1,46E-02	4,41E-02	-1,69E+01
Non-hazardous waste	kg	3,84E+02	7,59E-01	1,02E+00	3,86E+02	8,46E-01	2,32E-01	MNR	MNR	MNR	MNR	MNR	3,36E+04	MNR	MNR	5,23E-02	1,54E+00	5,89E+00	-3,15E+02
Radioactive waste	kg	4,23E-03	2,54E-04	2,65E-05	4,51E-03	2,60E-04	2,76E-08	MNR	MNR	MNR	MNR	MNR	1,08E+00	MNR	MNR	1,61E-05	8,51E-06	0,00E+00	-2,32E-03

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	6,54E+00	0,00E+00	0,00E+00
Materials for energy rec	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	4,64E-01	4,64E-01	0,00E+00	0,00E+00	MNR	MNR	MNR	MNR	MNR	0,00E+00	MNR	MNR	0,00E+00	2,33E+01	0,00E+00	0,00E+00

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	2,46E+02	2,56E+00	1,24E+00	2,49E+02	2,56E+00	4,15E-01	MNR	MNR	MNR	MNR	MNR	6,89E+03	MNR	MNR	1,58E-01	2,67E+00	2,79E+00	-1,05E+02
Ozone depletion Pot.	kg CFC <sub>11</sub> e	1,79E-05	4,59E-07	1,13E-07	1,84E-05	4,71E-07	5,23E-10	MNR	MNR	MNR	MNR	MNR	3,06E-04	MNR	MNR	2,91E-08	1,85E-08	1,77E-08	-2,47E-06
Acidification	kg SO <sub>2</sub> e	1,48E+00	1,90E-02	3,55E-03	1,50E+00	8,50E-03	6,60E-05	MNR	MNR	MNR	MNR	MNR	3,37E+01	MNR	MNR	5,26E-04	1,83E-03	8,75E-04	-9,60E-01
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	4,31E-01	2,93E-03	1,53E-03	4,35E-01	1,94E-03	5,52E-05	MNR	MNR	MNR	MNR	MNR	2,59E+01	MNR	MNR	1,20E-04	7,49E-04	8,72E-03	-2,71E-01
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	8,87E-02	5,82E-04	4,13E-04	8,97E-02	3,32E-04	1,28E-06	MNR	MNR	MNR	MNR	MNR	1,38E+00	MNR	MNR	2,05E-05	6,33E-05	2,62E-04	-4,71E-02
ADP-elements	kg Sbe	7,60E-03	5,45E-06	6,16E-06	7,61E-03	5,87E-06	1,88E-08	MNR	MNR	MNR	MNR	MNR	6,48E-02	MNR	MNR	3,63E-07	1,71E-05	4,24E-07	-1,57E-03
ADP-fossil	MJ	2,59E+03	3,77E+01	2,60E+01	2,65E+03	3,88E+01	6,85E-02	MNR	MNR	MNR	MNR	MNR	1,48E+05	MNR	MNR	2,40E+00	2,42E+00	2,09E+00	-1,05E+03

## APPENDIX (EPD HUB ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

**Table A1: Light management function (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

**Table A2 Scaled GWP per scaling factor (EPD Hub aligned)**

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
BGP763 LED240-4S/722	20160	182	110,8	1,034	1,034	0,776	0,776	0,569	7207,6	5405,7	5405,7	3964,2
BGP763 LED260-4S/722	21840	198	110,3	1,125	1,125	0,844	0,844	0,619	7841,3	5880,9	5880,9	4312,7
BGP763 LED280-4S/722	23240	230	101,0	1,307	1,307	0,980	0,980	0,719	9108,5	6831,4	6831,4	5009,7
BGP763 LED240-4S/727	20400	166	122,9	0,943	0,943	0,707	0,707	0,519	6574,0	4930,5	4930,5	3615,7
BGP763 LED260-4S/727	21840	182	120,0	1,034	1,034	0,776	0,776	0,569	7207,6	5405,7	5405,7	3964,2
BGP763 LED280-4S/727	23520	190	123,8	1,080	1,080	0,810	0,810	0,594	7524,4	5643,3	5643,3	4138,4
BGP763 LED300-4S/727	25200	205	122,9	1,165	1,165	0,874	0,874	0,641	8118,5	6088,8	6088,8	4465,2
BGP763 LED320-4S/727	26880	225	119,5	1,278	1,278	0,959	0,959	0,703	8910,5	6682,9	6682,9	4900,8
BGP763 LED240-4S/730	20400	146	139,7	0,830	0,830	0,622	0,622	0,456	5781,9	4336,4	4336,4	3180,1
BGP763 LED260-4S/730	22100	160	138,1	0,909	0,909	0,682	0,682	0,500	6336,4	4752,3	4752,3	3485,0
BGP763 LED280-4S/730	23520	174	135,2	0,989	0,989	0,741	0,741	0,544	6890,8	5168,1	5168,1	3789,9
BGP763 LED300-4S/730	25200	182	138,5	1,034	1,034	0,776	0,776	0,569	7207,6	5405,7	5405,7	3964,2
BGP763 LED320-4S/730	26880	196	137,1	1,114	1,114	0,835	0,835	0,613	7762,0	5821,5	5821,5	4269,1
BGP763 LED340-4S/730	28560	210	136,0	1,193	1,193	0,895	0,895	0,656	8316,5	6237,4	6237,4	4574,1
BGP763 LED360-4S/730	30240	225	134,4	1,278	1,278	0,959	0,959	0,703	8910,5	6682,9	6682,9	4900,8
BGP763 LED240-4S/740	20640	136	151,8	0,773	0,773	0,580	0,580	0,425	5385,9	4039,4	4039,4	2962,3

BGP763 LED260-4S/740	22100	150	147,3	0,852	0,852	0,639	0,639	0,469	5940,3	4455,3	4455,3	3267,2
BGP763 LED280-4S/740	23800	162	146,9	0,920	0,920	0,690	0,690	0,506	6415,6	4811,7	4811,7	3528,6
BGP763 LED300-4S/740	25200	176	143,2	1,000	1,000	0,750	0,750	0,550	6970,0	5227,5	5227,5	3833,5
BGP763 LED320-4S/740	26880	182	147,7	1,034	1,034	0,776	0,776	0,569	7207,6	5405,7	5405,7	3964,2
BGP763 LED340-4S/740	28560	196	145,7	1,114	1,114	0,835	0,835	0,613	7762,0	5821,5	5821,5	4269,1
BGP763 LED360-4S/740	30240	210	144,0	1,193	1,193	0,895	0,895	0,656	8316,5	6237,4	6237,4	4574,1
BGP763 LED240-4S/757	20640	136	151,8	0,773	0,773	0,580	0,580	0,425	5385,9	4039,4	4039,4	2962,3
BGP763 LED260-4S/757	22100	150	147,3	0,852	0,852	0,639	0,639	0,469	5940,3	4455,3	4455,3	3267,2
BGP763 LED280-4S/757	23800	162	146,9	0,920	0,920	0,690	0,690	0,506	6415,6	4811,7	4811,7	3528,6
BGP763 LED300-4S/757	25200	176	143,2	1,000	1,000	0,750	0,750	0,550	6970,0	5227,5	5227,5	3833,5
BGP763 LED320-4S/757	26880	182	147,7	1,034	1,034	0,776	0,776	0,569	7207,6	5405,7	5405,7	3964,2
BGP763 LED340-4S/757	28560	196	145,7	1,114	1,114	0,835	0,835	0,613	7762,0	5821,5	5821,5	4269,1
BGP763 LED360-4S/757	30240	210	144,0	1,193	1,193	0,895	0,895	0,656	8316,5	6237,4	6237,4	4574,1
BGP763 LED240-4S/827	20400	174	117,2	0,989	0,989	0,741	0,741	0,544	6890,8	5168,1	5168,1	3789,9
BGP763 LED260-4S/827	21840	190	114,9	1,080	1,080	0,810	0,810	0,594	7524,4	5643,3	5643,3	4138,4
BGP763 LED280-4S/827	23240	230	101,0	1,307	1,307	0,980	0,980	0,719	9108,5	6831,4	6831,4	5009,7
BGP763 LED240-4S/830	20400	160	127,5	0,909	0,909	0,682	0,682	0,500	6336,4	4752,3	4752,3	3485,0
BGP763 LED260-4S/830	22100	176	125,6	1,000	1,000	0,750	0,750	0,550	6970,0	5227,5	5227,5	3833,5
BGP763 LED280-4S/830	23520	190	123,8	1,080	1,080	0,810	0,810	0,594	7524,4	5643,3	5643,3	4138,4
BGP763 LED300-4S/830	25200	205	122,9	1,165	1,165	0,874	0,874	0,641	8118,5	6088,8	6088,8	4465,2
BGP763 LED320-4S/830	26880	225	119,5	1,278	1,278	0,959	0,959	0,703	8910,5	6682,9	6682,9	4900,8
BGP763 LED240-4S/840	20400	154	132,5	0,875	0,875	0,656	0,656	0,481	6098,8	4574,1	4574,1	3354,3
BGP763 LED260-4S/840	22100	170	130,0	0,966	0,966	0,724	0,724	0,531	6732,4	5049,3	5049,3	3702,8
BGP763 LED280-4S/840	23520	184	127,8	1,045	1,045	0,784	0,784	0,575	7286,8	5465,1	5465,1	4007,8
BGP763 LED300-4S/840	25200	198	127,3	1,125	1,125	0,844	0,844	0,619	7841,3	5880,9	5880,9	4312,7

BGP763 LED320-4S/840	26880	215	125,0	1,222	1,222	0,916	0,916	0,672	8514,5	6385,9	6385,9	4683,0
BGP763 LED340-4S/840	28560	230	124,2	1,307	1,307	0,980	0,980	0,719	9108,5	6831,4	6831,4	5009,7

*\* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.*

## APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output ( $O_{lum}$ ) and reference service life ( $RSL$ ) of each product within the same product family.

To calculate the Scaled Impact ( $SI_{pep}$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output ( $O_{lum}$ ) and reference service lifetime ( $RSL$ ) of the product to estimate the final environmental impact. The scaled impact ( $SI_{pep}$ ) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ( $PGSF$ ), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor ( $CSF$ ), where the  $CSF$  is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

**Table A3: Light management functions (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled GWP} = \text{GWP}_{\text{case}} * \text{TSF}$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Presented controls factors and functional unit conversion values are based on the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). Please refer to this publication or contact Signify directly for more information.

**Table A4 Scale impact per scaling factor (PEP EcoPassport aligned)**

Configuration	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
					NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
BGP763 LED240-4S/722	20160	182	110,8	1,034	0,018	0,013	0,013	0,010	125,1	93,8	93,8	68,8
BGP763 LED260-4S/722	21840	198	110,3	1,125	0,018	0,014	0,014	0,010	125,7	94,2	94,2	69,1
BGP763 LED280-4S/722	23240	230	101,0	1,307	0,020	0,015	0,015	0,011	137,2	102,9	102,9	75,4
BGP763 LED240-4S/727	20400	166	122,9	0,943	0,016	0,012	0,012	0,009	112,8	84,6	84,6	62,0
BGP763 LED260-4S/727	21840	182	120,0	1,034	0,017	0,012	0,012	0,009	115,5	86,6	86,6	63,5
BGP763 LED280-4S/727	23520	190	123,8	1,080	0,016	0,012	0,012	0,009	112,0	84,0	84,0	61,6
BGP763 LED300-4S/727	25200	205	122,9	1,165	0,016	0,012	0,012	0,009	112,8	84,6	84,6	62,0
BGP763 LED320-4S/727	26880	225	119,5	1,278	0,017	0,012	0,012	0,009	116,0	87,0	87,0	63,8
BGP763 LED240-4S/730	20400	146	139,7	0,830	0,014	0,011	0,011	0,008	99,2	74,4	74,4	54,6
BGP763 LED260-4S/730	22100	160	138,1	0,909	0,014	0,011	0,011	0,008	100,3	75,3	75,3	55,2

BGP763 LED280-4S/730	23520	174	135,2	0,989	0,015	0,011	0,011	0,008	102,5	76,9	76,9	56,4
BGP763 LED300-4S/730	25200	182	138,5	1,034	0,014	0,011	0,011	0,008	100,1	75,1	75,1	55,1
BGP763 LED320-4S/730	26880	196	137,1	1,114	0,015	0,011	0,011	0,008	101,1	75,8	75,8	55,6
BGP763 LED340-4S/730	28560	210	136,0	1,193	0,015	0,011	0,011	0,008	101,9	76,4	76,4	56,1
BGP763 LED360-4S/730	30240	225	134,4	1,278	0,015	0,011	0,011	0,008	103,1	77,3	77,3	56,7
BGP763 LED240-4S/740	20640	136	151,8	0,773	0,013	0,010	0,010	0,007	91,3	68,5	68,5	50,2
BGP763 LED260-4S/740	22100	150	147,3	0,852	0,013	0,010	0,010	0,007	94,1	70,6	70,6	51,7
BGP763 LED280-4S/740	23800	162	146,9	0,920	0,014	0,010	0,010	0,007	94,3	70,8	70,8	51,9
BGP763 LED300-4S/740	25200	176	143,2	1,000	0,014	0,010	0,010	0,008	96,8	72,6	72,6	53,2
BGP763 LED320-4S/740	26880	182	147,7	1,034	0,013	0,010	0,010	0,007	93,8	70,4	70,4	51,6
BGP763 LED340-4S/740	28560	196	145,7	1,114	0,014	0,010	0,010	0,008	95,1	71,3	71,3	52,3
BGP763 LED360-4S/740	30240	210	144,0	1,193	0,014	0,010	0,010	0,008	96,3	72,2	72,2	52,9
BGP763 LED240-4S/757	20640	136	151,8	0,773	0,013	0,010	0,010	0,007	91,3	68,5	68,5	50,2
BGP763 LED260-4S/757	22100	150	147,3	0,852	0,013	0,010	0,010	0,007	94,1	70,6	70,6	51,7
BGP763 LED280-4S/757	23800	162	146,9	0,920	0,014	0,010	0,010	0,007	94,3	70,8	70,8	51,9
BGP763 LED300-4S/757	25200	176	143,2	1,000	0,014	0,010	0,010	0,008	96,8	72,6	72,6	53,2
BGP763 LED320-4S/757	26880	182	147,7	1,034	0,013	0,010	0,010	0,007	93,8	70,4	70,4	51,6
BGP763 LED340-4S/757	28560	196	145,7	1,114	0,014	0,010	0,010	0,008	95,1	71,3	71,3	52,3
BGP763 LED360-4S/757	30240	210	144,0	1,193	0,014	0,010	0,010	0,008	96,3	72,2	72,2	52,9
BGP763 LED240-4S/827	20400	174	117,2	0,989	0,017	0,013	0,013	0,009	118,2	88,7	88,7	65,0
BGP763 LED260-4S/827	21840	190	114,9	1,080	0,017	0,013	0,013	0,010	120,6	90,4	90,4	66,3
BGP763 LED280-4S/827	23240	230	101,0	1,307	0,020	0,015	0,015	0,011	137,2	102,9	102,9	75,4
BGP763 LED240-4S/830	20400	160	127,5	0,909	0,016	0,012	0,012	0,009	108,7	81,5	81,5	59,8
BGP763 LED260-4S/830	22100	176	125,6	1,000	0,016	0,012	0,012	0,009	110,4	82,8	82,8	60,7
BGP763 LED280-4S/830	23520	190	123,8	1,080	0,016	0,012	0,012	0,009	112,0	84,0	84,0	61,6
BGP763 LED300-4S/830	25200	205	122,9	1,165	0,016	0,012	0,012	0,009	112,8	84,6	84,6	62,0
BGP763 LED320-4S/830	26880	225	119,5	1,278	0,017	0,012	0,012	0,009	116,0	87,0	87,0	63,8
BGP763 LED240-4S/840	20400	154	132,5	0,875	0,015	0,011	0,011	0,008	104,6	78,5	78,5	57,5
BGP763 LED260-4S/840	22100	170	130,0	0,966	0,015	0,011	0,011	0,008	106,6	80,0	80,0	58,6
BGP763 LED280-4S/840	23520	184	127,8	1,045	0,016	0,012	0,012	0,009	108,4	81,3	81,3	59,6
BGP763 LED300-4S/840	25200	198	127,3	1,125	0,016	0,012	0,012	0,009	108,9	81,7	81,7	59,9
BGP763 LED320-4S/840	26880	215	125,0	1,222	0,016	0,012	0,012	0,009	110,9	83,1	83,1	61,0
BGP763 LED340-4S/840	28560	230	124,2	1,307	0,016	0,012	0,012	0,009	111,6	83,7	83,7	61,4

\* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.

