ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

Signify - TCPT65 17S/840 PSU HWB T102 WH 280

Signify N.V.



EPD HUB, HUB-4943

Published on 21.01.2026, last updated on 21.01.2026, valid until 21.01.2031

MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	PILA, POLAND
Place(s) of raw material origin	EU, APAC
Place(s) of installation and use	EU
Period for data	Calendar Year 2023

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☐ Internal verification ☑ External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

PRODUCT SPECIFICATION

Product name	Signify - TCPT65 17S/840 PSU HWB T102 WH 280
Product number / reference	910505104895 / Accent Cylinder D65
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	5.53

PRODUCT DESCRIPTION

Energy-efficient, with three different mounting options and a sleek design where the housing and front ring color can be mixed and matched, the Accent Cylinder D65 is a spotlight that ensures you stand out. Offering a wide range of beam angles and color temperatures, this lighting solution is ideal for fashion retail, hospitality, and residential settings. Plus, the honeycomb glare accessory guarantees perfect visual comfort for your customers or guests.

Just like the other Accent D65 family members, the Accent Cylinder D65 features a 3D-printed housing made from at least 65% recycled or bio-circular materials and a heatsink crafted from 85% recycled aluminum. Its circular design is not only stylish but also upgradable, reusable, serviceable, and recyclable, making it a truly sustainable lighting solution.

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT CLASSIFICATION

Declared operating voltage, Volt	220-240
Light source colour temperature, Kelvin	4000
Protection index for water and dust (IP)	20
Impact resistance index (IK)	2
Luminous flux, Lumens	1727
Electrical power, Watt	11.7
Luminous efficiency, Lm/W	148
Additional characteristic	Not applicable

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: https://www.signify.com/global

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	51.11	EU , APAC
Minerals	0.11	EU , APAC
Fossil materials	47.85	EU , APAC
Bio-based materials	0.92	EU

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0.002
Biogenic carbon content in packaging, kg C	0.095

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	0.653
Mass of packaging, kg	0.24
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	10
Assigned lifetime (hours)	50000
GWP-total, A1-A3 (kg CO_2e)	7.31
GWP-fossil, A1-A3 (kg CO_2e)	7.62
Secondary material, inputs (%)	19.8
Secondary material, outputs (%)	33.9
Total energy use, A1-A3 (kWh)	33.8
Net freshwater use, A1-A3 (m^3)	1.52E-01

LIFE CYCLE ASSESSMENT

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

PRODUCT & MANUFACTURING SITES GROUPING

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	-

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.
The use of renewable energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

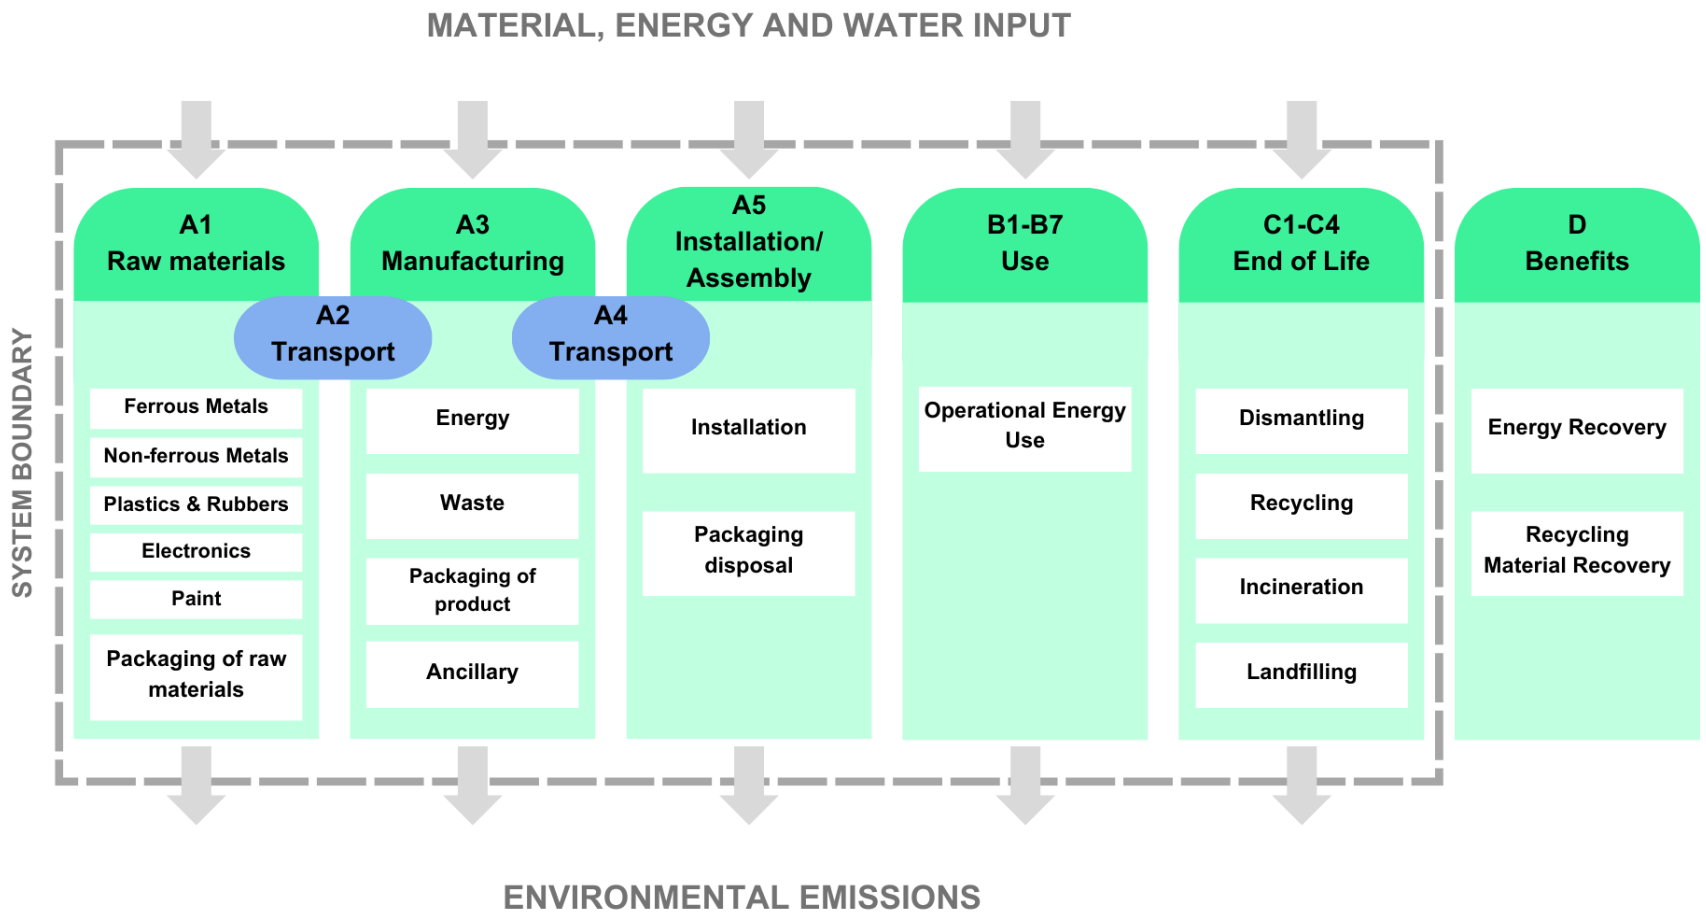

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total[1)]	kg CO_2e	7.22E+00	8.86E-02	2.17E-03	7.31E+00	3.82E-02	3.62E-01	ND	ND	ND	ND	ND	1.93E+02	ND	0.00E+00	1.92E-02	2.86E-01	1.50E-01	-1.14E+00
GWP – fossil	kg CO_2e	7.19E+00	8.85E-02	3.36E-01	7.62E+00	3.82E-02	1.50E-02	ND	ND	ND	ND	ND	1.91E+02	ND	0.00E+00	1.91E-02	2.86E-01	1.50E-01	-1.13E+00
GWP – biogenic	kg CO_2e	1.31E-02	1.73E-05	-3.42E-01	-3.28E-01	8.65E-06	3.47E-01	ND	ND	ND	ND	ND	4.29E-01	ND	0.00E+00	4.18E-06	-5.74E-06	-1.83E-05	-1.78E-03
GWP – LULUC	kg CO_2e	1.52E-02	4.33E-05	7.85E-03	2.31E-02	1.71E-05	5.55E-06	ND	ND	ND	ND	ND	5.88E-01	ND	0.00E+00	8.48E-06	2.06E-05	6.00E-06	-1.65E-03
Ozone depletion pot.	kg CFC_{-11}e	1.34E-07	1.29E-09	8.66E-09	1.44E-07	5.64E-10	2.07E-10	ND	ND	ND	ND	ND	3.53E-06	ND	0.00E+00	2.68E-10	2.06E-10	1.34E-10	-7.51E-09
Acidification potential	mol H^+e	1.22E-01	1.33E-03	1.68E-03	1.25E-01	1.30E-04	8.94E-05	ND	ND	ND	ND	ND	1.13E+00	ND	0.00E+00	6.38E-05	1.59E-04	5.83E-05	-6.16E-02
EP-freshwater[2)]	kg Pe	7.92E-03	5.05E-06	1.46E-04	8.07E-03	2.97E-06	1.51E-06	ND	ND	ND	ND	ND	1.78E-01	ND	0.00E+00	1.49E-06	6.79E-06	9.73E-07	-3.39E-03
EP-marine	kg Ne	9.95E-03	3.44E-04	8.14E-04	1.11E-02	4.28E-05	4.17E-05	ND	ND	ND	ND	ND	1.77E-01	ND	0.00E+00	2.07E-05	5.57E-05	2.42E-04	-2.85E-03
EP-terrestrial	mol Ne	1.15E-01	3.81E-03	5.00E-03	1.23E-01	4.66E-04	3.80E-04	ND	ND	ND	ND	ND	1.58E+00	ND	0.00E+00	2.25E-04	5.27E-04	2.64E-04	-3.82E-02
POCP ("smog")[3)]	kg NMVOCe	4.15E-02	1.12E-03	1.59E-03	4.42E-02	1.92E-04	1.08E-04	ND	ND	ND	ND	ND	5.21E-01	ND	0.00E+00	8.88E-05	1.41E-04	7.63E-05	-1.14E-02
ADP-minerals & metals[4)]	kg Sbe	1.57E-03	1.75E-07	1.14E-06	1.58E-03	1.07E-07	4.47E-08	ND	ND	ND	ND	ND	2.58E-03	ND	0.00E+00	6.29E-08	4.24E-07	2.01E-08	-9.12E-04
ADP-fossil resources	MJ	1.03E+02	1.19E+00	4.58E+00	1.09E+02	5.54E-01	1.56E-01	ND	ND	ND	ND	ND	4.46E+03	ND	0.00E+00	2.69E-01	1.99E-01	9.90E-02	-1.32E+01
Water use[5)]	m^3e depr.	6.13E+00	4.86E-03	1.11E-01	6.25E+00	2.74E-03	1.80E-02	ND	ND	ND	ND	ND	1.21E+02	ND	0.00E+00	1.25E-03	2.06E-02	1.01E-02	-4.61E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	5.56E-07	6.07E-09	3.29E-08	5.95E-07	3.82E-09	1.11E-09	ND	ND	ND	ND	ND	4.02E-06	ND	0.00E+00	1.52E-09	1.51E-09	7.41E-10	-1.37E-07
Ionizing radiation[6)]	kBq U235e	7.16E-01	8.37E-04	1.70E-02	7.34E-01	4.83E-04	1.88E-04	ND	ND	ND	ND	ND	1.23E+02	ND	0.00E+00	2.17E-04	1.11E-03	1.33E-04	-1.09E-01
Ecotoxicity (freshwater)	CTUe	1.90E+02	1.36E-01	1.76E+00	1.92E+02	7.84E-02	4.30E-01	ND	ND	ND	ND	ND	6.79E+02	ND	0.00E+00	4.25E-02	6.00E-01	4.83E+00	-5.18E+01
Human toxicity, cancer	CTUh	1.41E-08	1.65E-11	1.88E-10	1.43E-08	6.30E-12	2.07E-11	ND	ND	ND	ND	ND	6.47E-08	ND	0.00E+00	3.25E-12	3.02E-11	2.93E-11	-7.95E-09
Human tox. non-cancer	CTUh	1.06E-06	5.78E-10	4.75E-09	1.07E-06	3.59E-10	8.46E-10	ND	ND	ND	ND	ND	3.36E-06	ND	0.00E+00	1.68E-10	1.31E-09	1.38E-09	-8.17E-07
SQP[7)]	-	5.02E+01	7.54E-01	1.83E+01	6.93E+01	5.58E-01	7.61E-02	ND	ND	ND	ND	ND	9.91E+02	ND	0.00E+00	1.60E-01	1.72E-01	1.45E-01	-2.15E+01

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy[8)]	MJ	2.06E+01	1.34E-02	4.37E-01	2.11E+01	7.60E-03	-4.26E+00	ND	ND	ND	ND	ND	1.22E+03	ND	0.00E+00	3.68E-03	2.39E-02	-1.04E-01	-2.12E+00
Renew. PER as material	MJ	1.36E-01	0.00E+00	3.01E+00	3.14E+00	0.00E+00	-3.06E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.09E-04	-8.27E-02	0.00E+00
Total use of renew. PER	MJ	2.08E+01	1.34E-02	3.45E+00	2.42E+01	7.60E-03	-7.32E+00	ND	ND	ND	ND	ND	1.22E+03	ND	0.00E+00	3.68E-03	2.38E-02	-1.87E-01	-2.12E+00
Non-re. PER as energy	MJ	9.47E+01	1.19E+00	4.54E+00	1.00E+02	5.54E-01	1.56E-01	ND	ND	ND	ND	ND	4.46E+03	ND	0.00E+00	2.69E-01	-3.99E+00	-5.75E+00	-1.32E+01
Non-re. PER as material	MJ	8.10E+00	0.00E+00	9.95E-03	8.11E+00	0.00E+00	-2.48E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-4.03E+00	-4.05E+00	0.00E+00
Total use of non-re. PER	MJ	1.03E+02	1.19E+00	4.55E+00	1.09E+02	5.54E-01	1.31E-01	ND	ND	ND	ND	ND	4.46E+03	ND	0.00E+00	2.69E-01	-8.03E+00	-9.80E+00	-1.32E+01
Secondary materials	kg	1.29E-01	0.00E+00	0.00E+00	1.29E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	4.97E-03	4.34E-06	2.63E-02	3.13E-02	3.00E-06	1.94E-06	ND	ND	ND	ND	ND	5.88E-03	ND	0.00E+00	1.54E-06	8.65E-06	1.71E-06	-2.21E-04
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m^3	1.50E-01	1.38E-04	2.44E-03	1.52E-01	8.19E-05	2.92E-04	ND	ND	ND	ND	ND	3.85E+00	ND	0.00E+00	3.56E-05	3.80E-04	-2.85E-04	-2.40E-02

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.19E+00	1.84E-03	1.93E-02	1.21E+00	9.39E-04	4.73E-03	ND	ND	ND	ND	ND	1.13E+01	ND	0.00E+00	4.68E-04	5.81E-03	4.19E-02	-3.39E-01
Non-hazardous waste	kg	4.94E+01	3.09E-02	7.18E-01	5.01E+01	1.74E-02	2.56E-01	ND	ND	ND	ND	ND	8.72E+02	ND	0.00E+00	8.78E-03	1.58E-01	8.43E-01	-2.11E+01
Radioactive waste	kg	1.90E-04	2.05E-07	4.02E-06	1.94E-04	1.18E-07	4.72E-08	ND	ND	ND	ND	ND	3.16E-02	ND	0.00E+00	5.32E-08	2.73E-07	3.31E-08	-2.74E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	3.95E-03	3.95E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.21E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.32E+00	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.54E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	7.61E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO_2e	7.18E+00	8.81E-02	3.70E-01	7.64E+00	3.80E-02	1.49E-02	ND	ND	ND	ND	ND	1.92E+02	ND	0.00E+00	1.90E-02	2.86E-01	1.49E-01	-1.13E+00
Ozone depletion Pot.	kg CFC_{-11}e	1.21E-07	1.03E-09	8.96E-09	1.31E-07	4.50E-10	1.76E-10	ND	ND	ND	ND	ND	2.95E-06	ND	0.00E+00	2.14E-10	1.78E-10	1.12E-10	-6.46E-09
Acidification	kg SO_2e	1.06E-01	1.05E-03	1.13E-03	1.08E-01	9.94E-05	6.57E-05	ND	ND	ND	ND	ND	9.59E-01	ND	0.00E+00	4.89E-05	1.22E-04	4.20E-05	-5.44E-02
Eutrophication	kg PO_4^3e	1.62E-02	1.33E-04	8.18E-04	1.72E-02	2.42E-05	2.04E-05	ND	ND	ND	ND	ND	1.24E-01	ND	0.00E+00	1.19E-05	2.68E-05	2.48E-05	-2.17E-03
POCP (“smog”)	kg C_2H_4e	6.73E-03	5.73E-05	1.28E-04	6.92E-03	8.86E-06	5.00E-06	ND	ND	ND	ND	ND	5.23E-02	ND	0.00E+00	4.38E-06	7.45E-06	4.54E-06	-2.30E-03
ADP-elements	kg Sbe	1.57E-03	1.71E-07	1.11E-06	1.57E-03	1.04E-07	3.74E-08	ND	ND	ND	ND	ND	2.58E-03	ND	0.00E+00	6.14E-08	4.17E-07	1.65E-08	-9.11E-04
ADP-fossil	MJ	9.21E+01	1.18E+00	4.30E+00	9.76E+01	5.47E-01	1.53E-01	ND	ND	ND	ND	ND	2.29E+03	ND	0.00E+00	2.65E-01	1.82E-01	9.69E-02	-1.15E+01

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO2e	7.21E+00	8.85E-02	3.44E-01	7.64E+00	3.82E-02	1.50E-02	ND	ND	ND	ND	ND	1.92E+02	ND	0.00E+00	1.91E-02	2.86E-01	1.50E-01	-1.13E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH4 fossil, CH4 biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO2 is set to zero.

ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total[1)]	kg CO_2 éq/FU	2.93E+00	3.59E-02	8.79E-04	2.96E+00	1.55E-02	1.47E-01	ND	ND	ND	ND	ND	7.80E+01	ND	0.00E+00	7.76E-03	1.16E-01	6.07E-02	-4.61E-01
GWP – fossil	kg CO_2 éq/FU	2.92E+00	3.59E-02	1.36E-01	3.09E+00	1.55E-02	6.09E-03	ND	ND	ND	ND	ND	7.76E+01	ND	0.00E+00	7.76E-03	1.16E-01	6.07E-02	-4.59E-01
GWP – biogenic	kg CO_2 éq/FU	5.30E-03	7.00E-06	-1.38E-01	-1.33E-01	3.51E-06	1.41E-01	ND	ND	ND	ND	ND	1.74E-01	ND	0.00E+00	1.69E-06	-2.32E-06	-7.40E-06	-7.23E-04
GWP – LULUC	kg CO_2 éq/FU	6.17E-03	1.75E-05	3.18E-03	9.37E-03	6.93E-06	2.25E-06	ND	ND	ND	ND	ND	2.38E-01	ND	0.00E+00	3.44E-06	8.34E-06	2.43E-06	-6.70E-04
Ozone depletion pot.	kg CFC_{11}e/FU	5.43E-08	5.23E-10	3.51E-09	5.83E-08	2.29E-10	8.38E-11	ND	ND	ND	ND	ND	1.43E-06	ND	0.00E+00	1.08E-10	8.34E-11	5.41E-11	-3.04E-09
Acidification potential	mole H^+e/FU	4.95E-02	5.38E-04	6.80E-04	5.07E-02	5.28E-05	3.62E-05	ND	ND	ND	ND	ND	4.56E-01	ND	0.00E+00	2.59E-05	6.43E-05	2.36E-05	-2.50E-02
EP-freshwater[2)]	kg Pe/FU	3.21E-03	2.05E-06	5.93E-05	3.27E-03	1.21E-06	6.12E-07	ND	ND	ND	ND	ND	7.22E-02	ND	0.00E+00	6.03E-07	2.75E-06	3.95E-07	-1.37E-03
EP-marine	kg Ne/FU	4.03E-03	1.39E-04	3.30E-04	4.50E-03	1.73E-05	1.69E-05	ND	ND	ND	ND	ND	7.16E-02	ND	0.00E+00	8.38E-06	2.26E-05	9.82E-05	-1.16E-03
EP-terrestrial	mol Ne/FU	4.64E-02	1.54E-03	2.03E-03	5.00E-02	1.89E-04	1.54E-04	ND	ND	ND	ND	ND	6.42E-01	ND	0.00E+00	9.12E-05	2.14E-04	1.07E-04	-1.55E-02
POCP ("smog")[3)]	kg NMVOCe/	1.68E-02	4.52E-04	6.45E-04	1.79E-02	7.78E-05	4.39E-05	ND	ND	ND	ND	ND	2.11E-01	ND	0.00E+00	3.60E-05	5.73E-05	3.09E-05	-4.62E-03
ADP-minerals & metals[4)]	kg Sbe/FU	6.38E-04	7.10E-08	4.60E-07	6.39E-04	4.32E-08	1.81E-08	ND	ND	ND	ND	ND	1.05E-03	ND	0.00E+00	2.55E-08	1.72E-07	8.13E-09	-3.69E-04
ADP-fossil resources	MJ/FU	4.17E+01	4.84E-01	1.86E+00	4.40E+01	2.25E-01	6.30E-02	ND	ND	ND	ND	ND	1.81E+03	ND	0.00E+00	1.09E-01	8.08E-02	4.01E-02	-5.34E+00
Water use[5)]	m^3e priv. /FU	2.49E+00	1.97E-03	4.48E-02	2.53E+00	1.11E-03	7.30E-03	ND	ND	ND	ND	ND	4.92E+01	ND	0.00E+00	5.05E-04	8.37E-03	4.10E-03	-1.87E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	2.26E-07	2.46E-09	1.33E-08	2.41E-07	1.55E-09	4.52E-10	ND	ND	ND	ND	ND	1.63E-06	ND	0.00E+00	6.16E-10	6.12E-10	3.00E-10	-5.56E-08
Ionizing radiation[6)]	kBq U235e/FU	2.90E-01	3.39E-04	6.91E-03	2.97E-01	1.96E-04	7.64E-05	ND	ND	ND	ND	ND	4.99E+01	ND	0.00E+00	8.81E-05	4.51E-04	5.40E-05	-4.41E-02
Ecotoxicity (freshwater)	CTUe/FU	7.71E+01	5.52E-02	7.12E-01	7.78E+01	3.18E-02	1.74E-01	ND	ND	ND	ND	ND	2.75E+02	ND	0.00E+00	1.72E-02	2.43E-01	1.96E+00	-2.10E+01
Human toxicity, cancer	CTUh/FU	5.73E-09	6.67E-12	7.61E-11	5.81E-09	2.55E-12	8.40E-12	ND	ND	ND	ND	ND	2.62E-08	ND	0.00E+00	1.32E-12	1.23E-11	1.19E-11	-3.22E-09
Human tox. non-cancer	CTUh/FU	4.30E-07	2.34E-10	1.93E-09	4.32E-07	1.45E-10	3.43E-10	ND	ND	ND	ND	ND	1.36E-06	ND	0.00E+00	6.81E-11	5.30E-10	5.59E-10	-3.31E-07
SQP[7)]	-/FU	2.04E+01	3.05E-01	7.41E+00	2.81E+01	2.26E-01	3.09E-02	ND	ND	ND	ND	ND	4.02E+02	ND	0.00E+00	6.50E-02	6.96E-02	5.88E-02	-8.70E+00

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy[8)]	MJ/FU	8.37E+00	5.45E-03	1.77E-01	8.55E+00	3.08E-03	-1.73E+00	ND	ND	ND	ND	ND	4.96E+02	ND	0.00E+00	1.49E-03	9.67E-03	-4.22E-02	-8.60E-01
Renew. PER as material	MJ/FU	5.51E-02	0.00E+00	1.22E+00	1.27E+00	0.00E+00	-1.24E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-4.41E-05	-3.35E-02	0.00E+00
Total use of renew. PER	MJ/FU	8.42E+00	5.45E-03	1.40E+00	9.82E+00	3.08E-03	-2.97E+00	ND	ND	ND	ND	ND	4.96E+02	ND	0.00E+00	1.49E-03	9.63E-03	-7.57E-02	-8.60E-01
Non-re. PER as energy	MJ/FU	3.84E+01	4.84E-01	1.84E+00	4.07E+01	2.25E-01	6.30E-02	ND	ND	ND	ND	ND	1.81E+03	ND	0.00E+00	1.09E-01	-1.62E+00	-2.33E+00	-5.35E+00
Non-re. PER as material	MJ/FU	3.28E+00	0.00E+00	4.03E-03	3.29E+00	0.00E+00	-1.01E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-1.63E+00	-1.64E+00	0.00E+00
Total use of non-re. PER	MJ/FU	4.17E+01	4.84E-01	1.85E+00	4.40E+01	2.25E-01	5.30E-02	ND	ND	ND	ND	ND	1.81E+03	ND	0.00E+00	1.09E-01	-3.25E+00	-3.97E+00	-5.35E+00
Secondary materials	kg/FU	5.23E-02	0.00E+00	0.00E+00	5.23E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	2.01E-03	1.76E-06	1.07E-02	1.27E-02	1.21E-06	7.85E-07	ND	ND	ND	ND	ND	2.38E-03	ND	0.00E+00	6.23E-07	3.51E-06	6.93E-07	-8.95E-05
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m^3/FU	6.06E-02	5.59E-05	9.87E-04	6.17E-02	3.32E-05	1.18E-04	ND	ND	ND	ND	ND	1.56E+00	ND	0.00E+00	1.44E-05	1.54E-04	-1.15E-04	-9.73E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	4.83E-01	7.48E-04	7.84E-03	4.92E-01	3.81E-04	1.92E-03	ND	ND	ND	ND	ND	4.57E+00	ND	0.00E+00	1.90E-04	2.36E-03	1.70E-02	-1.37E-01
Non-hazardous waste	kg/FU	2.00E+01	1.25E-02	2.91E-01	2.03E+01	7.04E-03	1.04E-01	ND	ND	ND	ND	ND	3.53E+02	ND	0.00E+00	3.56E-03	6.41E-02	3.42E-01	-8.57E+00
Radioactive waste	kg/FU	7.71E-05	8.29E-08	1.63E-06	7.88E-05	4.79E-08	1.91E-08	ND	ND	ND	ND	ND	1.28E-02	ND	0.00E+00	2.16E-08	1.11E-07	1.34E-08	-1.11E-05

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	1.60E-03	1.60E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	8.97E-02	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.33E-01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	2.24E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.09E-01	0.00E+00	0.00E+00

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO_2 éq./FU	2.91E+00	3.57E-02	1.50E-01	3.10E+00	1.54E-02	6.05E-03	ND	ND	ND	ND	ND	7.76E+01	ND	0.00E+00	7.72E-03	1.16E-01	6.05E-02	-4.58E-01
Ozone depletion Pot.	kg CFC_{-11}e/FU	4.91E-08	4.16E-10	3.63E-09	5.32E-08	1.82E-10	7.12E-11	ND	ND	ND	ND	ND	1.19E-06	ND	0.00E+00	8.67E-11	7.20E-11	4.53E-11	-2.62E-09
Acidification	kg SO_2e/FU	4.31E-02	4.27E-04	4.60E-04	4.39E-02	4.03E-05	2.66E-05	ND	ND	ND	ND	ND	3.89E-01	ND	0.00E+00	1.98E-05	4.96E-05	1.70E-05	-2.21E-02
Eutrophication	kg PO_4^3e/FU	6.57E-03	5.39E-05	3.32E-04	6.96E-03	9.82E-06	8.27E-06	ND	ND	ND	ND	ND	5.03E-02	ND	0.00E+00	4.82E-06	1.09E-05	1.00E-05	-8.78E-04
POCP (“smog”)	kg C_2H_4e/FU	2.73E-03	2.32E-05	5.20E-05	2.80E-03	3.59E-06	2.03E-06	ND	ND	ND	ND	ND	2.12E-02	ND	0.00E+00	1.77E-06	3.02E-06	1.84E-06	-9.34E-04
ADP-elements	kg Sbe/FU	6.37E-04	6.94E-08	4.52E-07	6.37E-04	4.21E-08	1.51E-08	ND	ND	ND	ND	ND	1.04E-03	ND	0.00E+00	2.49E-08	1.69E-07	6.69E-09	-3.69E-04
ADP-fossil	MJ/FU	3.73E+01	4.79E-01	1.74E+00	3.96E+01	2.22E-01	6.18E-02	ND	ND	ND	ND	ND	9.27E+02	ND	0.00E+00	1.07E-01	7.36E-02	3.93E-02	-4.66E+00

ADDITIONAL INDICATOR – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG [9]	kg CO_2e/FU	2.92E+00	3.59E-02	1.39E-01	3.10E+00	1.55E-02	6.10E-03	ND	ND	ND	ND	ND	7.79E+01	ND	0.00E+00	7.76E-03	1.16E-01	6.07E-02	-4.60E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH4 fossil, CH4 biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO2 is set to zero.

SCENARIO DOCUMENTATION

DATA SOURCES

Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, wind, Electricity production, wind, 1-3MW turbine, onshore, Poland, ecoinvent 3.10.1, 0.0176 kgCO2e/kWh
2. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Poland, ecoinvent 3.10.1, 0.0295 kgCO2e/MJ
3. Construction, specialized activities, demolition and site preparation, Market for diesel, burned in building machine, World, ecoinvent 3.10.1, 0.10 kgCO2e/MJ

Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 397.32 km
2. Transport, freight, sea, container ship, 0.0 km

Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 0.24 kg

Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market group for electricity, low voltage, Europe, 585.0 kWh

TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m3	8.64E+01
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m³	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m^3	0
Power output of equipment / kW	11.7
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	0.653
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	2.21E-01
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	2.94E-01
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang

The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

Verified tools
Tool verifier: Hai Ha Nguyen
Tool verification validity: 28 March 2025 - 27 March 2028

APPENDIX 1

MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

Table 1: Material composition

Material	Weight (g)	Weight-%
Aluminium	155.0	23.72
Copper	134.7	20.62
Other Mineral	0.5	0.08
Other Plastics	228.89	35.03
Printing Paper	6.0	0.92
PCB Copper	19.21	2.94
PCB Iron	19.9	3.05
PCB Support	73.75	11.29
PCB Tin	1.14	0.17
PP / PS-High Impact PS / ABS	10.01	1.53
Silica Sand	0.25	0.04
Steel	4.0	0.61

APPENDIX 2

USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of EU. The table in this appendix is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total[1]	kg CO_2e	4.44E-01	4.75E-03	2.34E-02	4.72E-01	9.50E-04	8.13E-03	ND	ND	ND	ND	ND	4.06E+02	ND	0.00E+00	5.50E-04	2.23E-03	7.33E-04	-2.82E-02

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland = (4.06E-02 / 3.30E-01) x 1.54E-01 = 1.89E-02.

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product familiy.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base}.

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

Table 1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ Impact = GWP_{case} * TSF$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

Table 2: GWP per scaling factor (EPD Hub aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	TCPT65	TCPT65 12S 830 PSU HMB	1420	9.7	146.4	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
2	TCPT65	TCPT65 12S 830 PSU HWB	1420	9.7	146.4	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
3	TCPT65	TCPT65 12S 830 PSU HVWB	1420	9.7	146.4	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
4	TCPT65	TCPT65 12S 830 PSU CLM24	1420	9.7	146.4	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
5	TCPT65	TCPT65 12S 830 PSU CLM32	1315	10.1	130.2	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
6	TCPT65	TCPT65 12S 830 PSU CLM54	1315	10.1	130.2	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
7	TCPT65	TCPT65 12S 830 PSU HMB FG	1315	10.1	130.2	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
8	TCPT65	TCPT65 12S 830 PSU HWB FG	1363	9.7	140.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
9	TCPT65	TCPT65 12S 830 PSU HVWB FG	1363	9.7	140.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
10	TCPT65	TCPT65 12S 840 PSU HMB	1363	9.7	140.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8

11	TCPT65	TCPT65 12S 840 PSU HWB	1461	9.7	150.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
12	TCPT65	TCPT65 12S 840 PSU HVWB	1461	9.7	150.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
13	TCPT65	TCPT65 12S 840 PSU CLM24	1461	9.7	150.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
14	TCPT65	TCPT65 12S 840 PSU CLM32	1353	10.1	134.0	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
15	TCPT65	TCPT65 12S 840 PSU CLM54	1353	10.1	134.0	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
16	TCPT65	TCPT65 12S 840 PSU HMB FG	1353	10.1	134.0	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
17	TCPT65	TCPT65 12S 840 PSU HWB FG	1403	9.7	144.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
18	TCPT65	TCPT65 12S 840 PSU HVWB FG	1403	9.7	144.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
19	TCPT65	TCPT65 12S PC930 PSU HMB	1403	9.7	144.6	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
20	TCPT65	TCPT65 12S PC930 PSU HWB	1260	9.7	129.9	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
21	TCPT65	TCPT65 12S PC930 PSU HVWB	1260	9.7	129.9	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
22	TCPT65	TCPT65 12S PC930 PSU CLM24	1260	9.7	129.9	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
23	TCPT65	TCPT65 12S PC930 PSU CLM32	1156	10.1	114.5	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
24	TCPT65	TCPT65 12S PC930 PSU CLM54	1156	10.1	114.5	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4

25	TCPT65	TCPT65 12S PC930 PSU HMB FG	1156	10.1	114.5	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
26	TCPT65	TCPT65 12S PC930 PSU HWB FG	1210	9.7	124.8	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
27	TCPT65	TCPT65 12S PC930 PSU HVWB FG	1210	9.7	124.8	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
28	TCPT65	TCPT65 12S PW930 PSU HMB	1210	9.7	124.8	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
29	TCPT65	TCPT65 12S PW930 PSU HWB	1356	9.7	139.7	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
30	TCPT65	TCPT65 12S PW930 PSU HVWB	1356	9.7	139.7	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
31	TCPT65	TCPT65 12S PW930 PSU CLM24	1356	9.7	139.7	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
32	TCPT65	TCPT65 12S PW930 PSU CLM32	1244	10.1	123.2	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
33	TCPT65	TCPT65 12S PW930 PSU CLM54	1244	10.1	123.2	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
34	TCPT65	TCPT65 12S PW930 PSU HMB FG	1244	10.1	123.2	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
35	TCPT65	TCPT65 12S PW930 PSU HWB FG	1302	9.7	134.2	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
36	TCPT65	TCPT65 12S PW930 PSU HVWB FG	1302	9.7	134.2	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
37	TCPT65	TCPT65 12S PW940 PSU HMB	1302	9.7	134.2	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
38	TCPT65	TCPT65 12S PW940 PSU HWB	1396	9.7	143.9	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8

39	TCPT65	TCPT65 12S PW940 PSU HVWB	1396	9.7	143.9	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
40	TCPT65	TCPT65 12S PW940 PSU CLM24	1396	9.7	143.9	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
41	TCPT65	TCPT65 12S PW940 PSU CLM32	1281	10.1	126.8	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
42	TCPT65	TCPT65 12S PW940 PSU CLM54	1281	10.1	126.8	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
43	TCPT65	TCPT65 12S PW940 PSU HMB FG	1281	10.1	126.8	0.863	0.863	0.647	0.647	0.475	166.1	124.5	124.5	91.4
44	TCPT65	TCPT65 12S PW940 PSU HWB FG	1341	9.7	138.2	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
45	TCPT65	TCPT65 12S PW940 PSU HVWB FG	1341	9.7	138.2	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
46	TCPT65	TCPT65 17S 830 PSU HMB	1341	9.7	138.2	0.829	0.829	0.622	0.622	0.456	159.6	119.7	119.7	87.8
47	TCPT65	TCPT65 17S 830 PSU HWB	1679	11.7	143.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
48	TCPT65	TCPT65 17S 830 PSU HVWB	1679	11.7	143.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
49	TCPT65	TCPT65 17S 830 PSU CLM24	1679	11.7	143.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
50	TCPT65	TCPT65 17S 830 PSU CLM32	1756	14.3	122.8	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
51	TCPT65	TCPT65 17S 830 PSU CLM54	1756	14.3	122.8	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
52	TCPT65	TCPT65 17S 830 PSU HMB FG	1756	14.3	122.8	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3

53	TCPT65	TCPT65 17S 830 PSU HWB FG	1612	11.7	137.8	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
54	TCPT65	TCPT65 17S 830 PSU HVWB FG	1612	11.7	137.8	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
55	TCPT65	TCPT65 17S 840 PSU HMB	1612	11.7	137.8	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
56	TCPT65	TCPT65 17S 840 PSU HWB	1727	11.7	147.6	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
57	TCPT65	TCPT65 17S 840 PSU HVWB	1727	11.7	147.6	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
58	TCPT65	TCPT65 17S 840 PSU CLM24	1727	11.7	147.6	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
59	TCPT65	TCPT65 17S 840 PSU CLM32	1807	14.3	126.3	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
60	TCPT65	TCPT65 17S 840 PSU CLM54	1807	14.3	126.3	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
61	TCPT65	TCPT65 17S 840 PSU HMB FG	1807	14.3	126.3	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
62	TCPT65	TCPT65 17S 840 PSU HWB FG	1658	11.7	141.7	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
63	TCPT65	TCPT65 17S 840 PSU HVWB FG	1658	11.7	141.7	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
64	TCPT65	TCPT65 17S PW930 PSU HMB	1658	11.7	141.7	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
65	TCPT65	TCPT65 17S PW930 PSU HWB	1602	11.7	137.0	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
66	TCPT65	TCPT65 17S PW930 PSU HVWB	1602	11.7	137.0	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9

67	TCPT65	TCPT65 17S PW930 PSU CLM24	1602	11.7	137.0	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
68	TCPT65	TCPT65 17S PW930 PSU CLM32	1661	14.3	116.2	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
69	TCPT65	TCPT65 17S PW930 PSU CLM54	1661	14.3	116.2	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
70	TCPT65	TCPT65 17S PW930 PSU HMB FG	1661	14.3	116.2	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
71	TCPT65	TCPT65 17S PW930 PSU HWB FG	1539	11.7	131.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
72	TCPT65	TCPT65 17S PW930 PSU HVWB FG	1539	11.7	131.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
73	TCPT65	TCPT65 17S PW940 PSU HMB	1539	11.7	131.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
74	TCPT65	TCPT65 17S PW940 PSU HWB	1651	11.7	141.1	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
75	TCPT65	TCPT65 17S PW940 PSU HVWB	1651	11.7	141.1	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
76	TCPT65	TCPT65 17S PW940 PSU CLM24	1651	11.7	141.1	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
77	TCPT65	TCPT65 17S PW940 PSU CLM32	1711	14.3	119.6	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
78	TCPT65	TCPT65 17S PW940 PSU CLM54	1711	14.3	119.6	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
79	TCPT65	TCPT65 17S PW940 PSU HMB FG	1711	14.3	119.6	1.222	1.222	0.916	0.916	0.672	235.2	176.3	176.3	129.3
80	TCPT65	TCPT65 17S PW940 PSU HWB FG	1585	11.7	135.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9

81	TCPT65	TCPT65 17S PW940 PSU HVWB FG	1585	11.7	135.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
82	TCPT65	TCPT65 20S PC930 PSU HMB	1585	11.7	135.5	1.0	1.0	0.75	0.75	0.55	192.5	144.3	144.3	105.9
83	TCPT65	TCPT65 20S PC930 PSU HWB	2127	16.8	126.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
84	TCPT65	TCPT65 20S PC930 PSU HVWB	2127	16.8	126.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
85	TCPT65	TCPT65 20S PC930 PSU HMB FG	2127	16.8	126.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
86	TCPT65	TCPT65 20S PC930 PSU HWB FG	2042	16.8	121.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
87	TCPT65	TCPT65 20S PC930 PSU HVWB FG	2042	16.8	121.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
88	TCPT65	TCPT65 22S 830 PSU HMB	2042	16.8	121.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
89	TCPT65	TCPT65 22S 830 PSU HWB	2396	16.8	142.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
90	TCPT65	TCPT65 22S 830 PSU HVWB	2396	16.8	142.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
91	TCPT65	TCPT65 22S 830 PSU HMB FG	2396	16.8	142.6	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
92	TCPT65	TCPT65 22S 830 PSU HWB FG	2301	16.8	137.0	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
93	TCPT65	TCPT65 22S 830 PSU HVWB FG	2301	16.8	137.0	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
94	TCPT65	TCPT65 22S 840 PSU HMB	2301	16.8	137.0	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0

95	TCPT65	TCPT65 22S 840 PSU HWB	2466	16.8	146.8	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
96	TCPT65	TCPT65 22S 840 PSU HVWB	2466	16.8	146.8	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
97	TCPT65	TCPT65 22S 840 PSU HMB FG	2466	16.8	146.8	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
98	TCPT65	TCPT65 22S 840 PSU HWB FG	2368	16.8	140.9	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
99	TCPT65	TCPT65 22S 840 PSU HVWB FG	2368	16.8	140.9	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
100	TCPT65	TCPT65 22S PC930 PSU HMB	2368	16.8	140.9	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
101	TCPT65	TCPT65 22S PC930 PSU HWB	2320	18.8	123.4	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
102	TCPT65	TCPT65 22S PC930 PSU HVWB	2320	18.8	123.4	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
103	TCPT65	TCPT65 22S PC930 PSU HMB FG	2320	18.8	123.4	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
104	TCPT65	TCPT65 22S PC930 PSU HWB FG	2228	18.8	118.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
105	TCPT65	TCPT65 22S PC930 PSU HVWB FG	2228	18.8	118.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
106	TCPT65	TCPT65 22S PW930 PSU HMB	2228	18.8	118.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
107	TCPT65	TCPT65 22S PW930 PSU HWB	2288	16.8	136.2	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
108	TCPT65	TCPT65 22S PW930 PSU HVWB	2288	16.8	136.2	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0

109	TCPT65	TCPT65 22S PW930 PSU HMB FG	2288	16.8	136.2	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
110	TCPT65	TCPT65 22S PW930 PSU HWB FG	2197	16.8	130.8	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
111	TCPT65	TCPT65 22S PW930 PSU HVWB FG	2197	16.8	130.8	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
112	TCPT65	TCPT65 22S PW940 PSU HMB	2197	16.8	130.8	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
113	TCPT65	TCPT65 22S PW940 PSU HWB	2357	16.8	140.3	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
114	TCPT65	TCPT65 22S PW940 PSU HVWB	2357	16.8	140.3	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
115	TCPT65	TCPT65 22S PW940 PSU HMB FG	2357	16.8	140.3	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
116	TCPT65	TCPT65 22S PW940 PSU HWB FG	2263	16.8	134.7	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
117	TCPT65	TCPT65 22S PW940 PSU HVWB FG	2263	16.8	134.7	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
118	TCPT65	TCPT65 27S 830 PSU HMB	2263	16.8	134.7	1.436	1.436	1.077	1.077	0.79	276.4	207.3	207.3	152.0
119	TCPT65	TCPT65 27S 830 PSU HWB	2614	18.8	139.0	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
120	TCPT65	TCPT65 27S 830 PSU HVWB	2614	18.8	139.0	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
121	TCPT65	TCPT65 27S 830 PSU HMB FG	2614	18.8	139.0	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
122	TCPT65	TCPT65 27S 830 PSU HWB FG	2510	18.8	133.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1

123	TCPT65	TCPT65 27S 830 PSU HVWB FG	2510	18.8	133.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
124	TCPT65	TCPT65 27S 840 PSU HMB	2510	18.8	133.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
125	TCPT65	TCPT65 27S 840 PSU HWB	2690	18.8	143.1	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
126	TCPT65	TCPT65 27S 840 PSU HVWB	2690	18.8	143.1	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
127	TCPT65	TCPT65 27S 840 PSU HMB FG	2690	18.8	143.1	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
128	TCPT65	TCPT65 27S 840 PSU HWB FG	2583	18.8	137.4	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
129	TCPT65	TCPT65 27S 840 PSU HVWB FG	2583	18.8	137.4	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
130	TCPT65	TCPT65 27S PW930 PSU HMB	2583	18.8	137.4	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
131	TCPT65	TCPT65 27S PW930 PSU HWB	2495	18.8	132.7	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
132	TCPT65	TCPT65 27S PW930 PSU HVWB	2495	18.8	132.7	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
133	TCPT65	TCPT65 27S PW930 PSU HMB FG	2495	18.8	132.7	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
134	TCPT65	TCPT65 27S PW930 PSU HWB FG	2396	18.8	127.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
135	TCPT65	TCPT65 27S PW930 PSU HVWB FG	2396	18.8	127.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
136	TCPT65	TCPT65 27S PW940 PSU HMB	2396	18.8	127.5	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1

137	TCPT65	TCPT65 27S PW940 PSU HWB	2571	18.8	136.7	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
138	TCPT65	TCPT65 27S PW940 PSU HVWB	2571	18.8	136.7	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
139	TCPT65	TCPT65 27S PW940 PSU HMB FG	2571	18.8	136.7	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
140	TCPT65	TCPT65 27S PW940 PSU HWB FG	2468	18.8	131.3	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1
141	TCPT65	TCPT65 27S PW940 PSU HVWB FG	2468	18.8	131.3	1.607	1.607	1.205	1.205	0.884	309.3	231.9	231.9	170.1

PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a refernce variant of a product family, based on various light management functions, the lumen output (O_{lum}) and reference service life (*RSL*) of each product within the same product familiy.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions P_{in} and the power input of the base variant P_{base}.

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output (Olum) and reference service lifetime (RSL) of the product to estimate the final environmental impact. The scaled impact (SIpep) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1{,}000}{O_{lum}} * \frac{35{,}000}{RSL}$$

3. Calculate the GWP scaling factor (P*GSF*), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

4. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

Table 3: Light management functions (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

5. Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

Table 4: Impact per scaling factor (PEP EcoPassport aligned)

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	TCPT65	TCPT65 12S 830 PSU HMB	1420	9.7	146.4	0.829	0.409	0.307	0.307	0.225	78.7	59.1	59.1	43.3
2	TCPT65	TCPT65 12S 830 PSU HWB	1420	9.7	146.4	0.829	0.409	0.307	0.307	0.225	78.7	59.1	59.1	43.3
3	TCPT65	TCPT65 12S 830 PSU HVWB	1420	9.7	146.4	0.829	0.409	0.307	0.307	0.225	78.7	59.1	59.1	43.3
4	TCPT65	TCPT65 12S 830 PSU CLM24	1420	9.7	146.4	0.829	0.409	0.307	0.307	0.225	78.7	59.1	59.1	43.3
5	TCPT65	TCPT65 12S 830 PSU CLM32	1315	10.1	130.2	0.863	0.459	0.344	0.344	0.252	88.3	66.2	66.2	48.5
6	TCPT65	TCPT65 12S 830 PSU CLM54	1315	10.1	130.2	0.863	0.459	0.344	0.344	0.252	88.3	66.2	66.2	48.5
7	TCPT65	TCPT65 12S 830 PSU HMB FG	1315	10.1	130.2	0.863	0.459	0.344	0.344	0.252	88.3	66.2	66.2	48.5
8	TCPT65	TCPT65 12S 830 PSU HWB FG	1363	9.7	140.6	0.829	0.425	0.319	0.319	0.234	81.8	61.4	61.4	45.0
9	TCPT65	TCPT65 12S 830 PSU HVWB FG	1363	9.7	140.6	0.829	0.425	0.319	0.319	0.234	81.8	61.4	61.4	45.0
10	TCPT65	TCPT65 12S 840 PSU HMB	1363	9.7	140.6	0.829	0.425	0.319	0.319	0.234	81.8	61.4	61.4	45.0
11	TCPT65	TCPT65 12S 840 PSU HWB	1461	9.7	150.6	0.829	0.397	0.298	0.298	0.218	76.4	57.4	57.4	42.0
12	TCPT65	TCPT65 12S 840 PSU HVWB	1461	9.7	150.6	0.829	0.397	0.298	0.298	0.218	76.4	57.4	57.4	42.0

13	TCPT65	TCPT65 12S 840 PSU CLM24	1461	9.7	150.6	0.829	0.397	0.298	0.298	0.218	76.4	57.4	57.4	42.0
14	TCPT65	TCPT65 12S 840 PSU CLM32	1353	10.1	134.0	0.863	0.446	0.335	0.335	0.245	85.8	64.5	64.5	47.2
15	TCPT65	TCPT65 12S 840 PSU CLM54	1353	10.1	134.0	0.863	0.446	0.335	0.335	0.245	85.8	64.5	64.5	47.2
16	TCPT65	TCPT65 12S 840 PSU HMB FG	1353	10.1	134.0	0.863	0.446	0.335	0.335	0.245	85.8	64.5	64.5	47.2
17	TCPT65	TCPT65 12S 840 PSU HWB FG	1403	9.7	144.6	0.829	0.414	0.31	0.31	0.228	79.7	59.7	59.7	43.9
18	TCPT65	TCPT65 12S 840 PSU HVWB FG	1403	9.7	144.6	0.829	0.414	0.31	0.31	0.228	79.7	59.7	59.7	43.9
19	TCPT65	TCPT65 12S PC930 PSU HMB	1403	9.7	144.6	0.829	0.414	0.31	0.31	0.228	79.7	59.7	59.7	43.9
20	TCPT65	TCPT65 12S PC930 PSU HWB	1260	9.7	129.9	0.829	0.46	0.345	0.345	0.253	88.5	66.4	66.4	48.7
21	TCPT65	TCPT65 12S PC930 PSU HVWB	1260	9.7	129.9	0.829	0.46	0.345	0.345	0.253	88.5	66.4	66.4	48.7
22	TCPT65	TCPT65 12S PC930 PSU CLM24	1260	9.7	129.9	0.829	0.46	0.345	0.345	0.253	88.5	66.4	66.4	48.7
23	TCPT65	TCPT65 12S PC930 PSU CLM32	1156	10.1	114.5	0.863	0.522	0.392	0.392	0.287	100.5	75.4	75.4	55.2
24	TCPT65	TCPT65 12S PC930 PSU CLM54	1156	10.1	114.5	0.863	0.522	0.392	0.392	0.287	100.5	75.4	75.4	55.2
25	TCPT65	TCPT65 12S PC930 PSU HMB FG	1156	10.1	114.5	0.863	0.522	0.392	0.392	0.287	100.5	75.4	75.4	55.2
26	TCPT65	TCPT65 12S PC930 PSU HWB FG	1210	9.7	124.8	0.829	0.479	0.359	0.359	0.263	92.2	69.1	69.1	50.6

27	TCPT65	TCPT65 12S PC930 PSU HVWB FG	1210	9.7	124.8	0.829	0.479	0.359	0.359	0.263	92.2	69.1	69.1	50.6
28	TCPT65	TCPT65 12S PW930 PSU HMB	1210	9.7	124.8	0.829	0.479	0.359	0.359	0.263	92.2	69.1	69.1	50.6
29	TCPT65	TCPT65 12S PW930 PSU HWB	1356	9.7	139.7	0.829	0.428	0.321	0.321	0.235	82.4	61.8	61.8	45.2
30	TCPT65	TCPT65 12S PW930 PSU HVWB	1356	9.7	139.7	0.829	0.428	0.321	0.321	0.235	82.4	61.8	61.8	45.2
31	TCPT65	TCPT65 12S PW930 PSU CLM24	1356	9.7	139.7	0.829	0.428	0.321	0.321	0.235	82.4	61.8	61.8	45.2
32	TCPT65	TCPT65 12S PW930 PSU CLM32	1244	10.1	123.2	0.863	0.486	0.364	0.364	0.267	93.5	70.1	70.1	51.4
33	TCPT65	TCPT65 12S PW930 PSU CLM54	1244	10.1	123.2	0.863	0.486	0.364	0.364	0.267	93.5	70.1	70.1	51.4
34	TCPT65	TCPT65 12S PW930 PSU HMB FG	1244	10.1	123.2	0.863	0.486	0.364	0.364	0.267	93.5	70.1	70.1	51.4
35	TCPT65	TCPT65 12S PW930 PSU HWB FG	1302	9.7	134.2	0.829	0.446	0.335	0.335	0.245	85.8	64.5	64.5	47.2
36	TCPT65	TCPT65 12S PW930 PSU HVWB FG	1302	9.7	134.2	0.829	0.446	0.335	0.335	0.245	85.8	64.5	64.5	47.2
37	TCPT65	TCPT65 12S PW940 PSU HMB	1302	9.7	134.2	0.829	0.446	0.335	0.335	0.245	85.8	64.5	64.5	47.2
38	TCPT65	TCPT65 12S PW940 PSU HWB	1396	9.7	143.9	0.829	0.415	0.311	0.311	0.228	79.9	59.9	59.9	43.9
39	TCPT65	TCPT65 12S PW940 PSU HVWB	1396	9.7	143.9	0.829	0.415	0.311	0.311	0.228	79.9	59.9	59.9	43.9
40	TCPT65	TCPT65 12S PW940 PSU CLM24	1396	9.7	143.9	0.829	0.415	0.311	0.311	0.228	79.9	59.9	59.9	43.9

41	TCPT65	TCPT65 12S PW940 PSU CLM32	1281	10.1	126.8	0.863	0.471	0.353	0.353	0.259	90.7	67.9	67.9	49.8
42	TCPT65	TCPT65 12S PW940 PSU CLM54	1281	10.1	126.8	0.863	0.471	0.353	0.353	0.259	90.7	67.9	67.9	49.8
43	TCPT65	TCPT65 12S PW940 PSU HMB FG	1281	10.1	126.8	0.863	0.471	0.353	0.353	0.259	90.7	67.9	67.9	49.8
44	TCPT65	TCPT65 12S PW940 PSU HWB FG	1341	9.7	138.2	0.829	0.433	0.325	0.325	0.238	83.3	62.6	62.6	45.8
45	TCPT65	TCPT65 12S PW940 PSU HVWB FG	1341	9.7	138.2	0.829	0.433	0.325	0.325	0.238	83.3	62.6	62.6	45.8
46	TCPT65	TCPT65 17S 830 PSU HMB	1341	9.7	138.2	0.829	0.433	0.325	0.325	0.238	83.3	62.6	62.6	45.8
47	TCPT65	TCPT65 17S 830 PSU HWB	1679	11.7	143.5	1.0	0.417	0.313	0.313	0.229	80.3	60.2	60.2	44.1
48	TCPT65	TCPT65 17S 830 PSU HVWB	1679	11.7	143.5	1.0	0.417	0.313	0.313	0.229	80.3	60.2	60.2	44.1
49	TCPT65	TCPT65 17S 830 PSU CLM24	1679	11.7	143.5	1.0	0.417	0.313	0.313	0.229	80.3	60.2	60.2	44.1
50	TCPT65	TCPT65 17S 830 PSU CLM32	1756	14.3	122.8	1.222	0.488	0.366	0.366	0.268	93.9	70.4	70.4	51.6
51	TCPT65	TCPT65 17S 830 PSU CLM54	1756	14.3	122.8	1.222	0.488	0.366	0.366	0.268	93.9	70.4	70.4	51.6
52	TCPT65	TCPT65 17S 830 PSU HMB FG	1756	14.3	122.8	1.222	0.488	0.366	0.366	0.268	93.9	70.4	70.4	51.6
53	TCPT65	TCPT65 17S 830 PSU HWB FG	1612	11.7	137.8	1.0	0.434	0.326	0.326	0.239	83.5	62.7	62.7	46.0
54	TCPT65	TCPT65 17S 830 PSU HVWB FG	1612	11.7	137.8	1.0	0.434	0.326	0.326	0.239	83.5	62.7	62.7	46.0

55	TCPT65	TCPT65 17S 840 PSU HMB	1612	11.7	137.8	1.0	0.434	0.326	0.326	0.239	83.5	62.7	62.7	46.0
56	TCPT65	TCPT65 17S 840 PSU HWB	1727	11.7	147.6	1.0	0.405	0.304	0.304	0.223	77.9	58.5	58.5	42.9
57	TCPT65	TCPT65 17S 840 PSU HVWB	1727	11.7	147.6	1.0	0.405	0.304	0.304	0.223	77.9	58.5	58.5	42.9
58	TCPT65	TCPT65 17S 840 PSU CLM24	1727	11.7	147.6	1.0	0.405	0.304	0.304	0.223	77.9	58.5	58.5	42.9
59	TCPT65	TCPT65 17S 840 PSU CLM32	1807	14.3	126.3	1.222	0.473	0.355	0.355	0.26	91.0	68.3	68.3	50.0
60	TCPT65	TCPT65 17S 840 PSU CLM54	1807	14.3	126.3	1.222	0.473	0.355	0.355	0.26	91.0	68.3	68.3	50.0
61	TCPT65	TCPT65 17S 840 PSU HMB FG	1807	14.3	126.3	1.222	0.473	0.355	0.355	0.26	91.0	68.3	68.3	50.0
62	TCPT65	TCPT65 17S 840 PSU HWB FG	1658	11.7	141.7	1.0	0.422	0.317	0.317	0.232	81.2	61.0	61.0	44.7
63	TCPT65	TCPT65 17S 840 PSU HVWB FG	1658	11.7	141.7	1.0	0.422	0.317	0.317	0.232	81.2	61.0	61.0	44.7
64	TCPT65	TCPT65 17S PW930 PSU HMB	1658	11.7	141.7	1.0	0.422	0.317	0.317	0.232	81.2	61.0	61.0	44.7
65	TCPT65	TCPT65 17S PW930 PSU HWB	1602	11.7	137.0	1.0	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
66	TCPT65	TCPT65 17S PW930 PSU HVWB	1602	11.7	137.0	1.0	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
67	TCPT65	TCPT65 17S PW930 PSU CLM24	1602	11.7	137.0	1.0	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
68	TCPT65	TCPT65 17S PW930 PSU CLM32	1661	14.3	116.2	1.222	0.514	0.386	0.386	0.283	98.9	74.3	74.3	54.5

69	TCPT65	TCPT65 17S PW930 PSU CLM54	1661	14.3	116.2	1.222	0.514	0.386	0.386	0.283	98.9	74.3	74.3	54.5
70	TCPT65	TCPT65 17S PW930 PSU HMB FG	1661	14.3	116.2	1.222	0.514	0.386	0.386	0.283	98.9	74.3	74.3	54.5
71	TCPT65	TCPT65 17S PW930 PSU HWB FG	1539	11.7	131.5	1.0	0.455	0.341	0.341	0.25	87.6	65.6	65.6	48.1
72	TCPT65	TCPT65 17S PW930 PSU HVWB FG	1539	11.7	131.5	1.0	0.455	0.341	0.341	0.25	87.6	65.6	65.6	48.1
73	TCPT65	TCPT65 17S PW940 PSU HMB	1539	11.7	131.5	1.0	0.455	0.341	0.341	0.25	87.6	65.6	65.6	48.1
74	TCPT65	TCPT65 17S PW940 PSU HWB	1651	11.7	141.1	1.0	0.424	0.318	0.318	0.233	81.6	61.2	61.2	44.8
75	TCPT65	TCPT65 17S PW940 PSU HVWB	1651	11.7	141.1	1.0	0.424	0.318	0.318	0.233	81.6	61.2	61.2	44.8
76	TCPT65	TCPT65 17S PW940 PSU CLM24	1651	11.7	141.1	1.0	0.424	0.318	0.318	0.233	81.6	61.2	61.2	44.8
77	TCPT65	TCPT65 17S PW940 PSU CLM32	1711	14.3	119.6	1.222	0.5	0.375	0.375	0.275	96.2	72.2	72.2	52.9
78	TCPT65	TCPT65 17S PW940 PSU CLM54	1711	14.3	119.6	1.222	0.5	0.375	0.375	0.275	96.2	72.2	72.2	52.9
79	TCPT65	TCPT65 17S PW940 PSU HMB FG	1711	14.3	119.6	1.222	0.5	0.375	0.375	0.275	96.2	72.2	72.2	52.9
80	TCPT65	TCPT65 17S PW940 PSU HWB FG	1585	11.7	135.5	1.0	0.442	0.332	0.332	0.243	85.1	63.9	63.9	46.8
81	TCPT65	TCPT65 17S PW940 PSU HVWB FG	1585	11.7	135.5	1.0	0.442	0.332	0.332	0.243	85.1	63.9	63.9	46.8
82	TCPT65	TCPT65 20S PC930 PSU HMB	1585	11.7	135.5	1.0	0.442	0.332	0.332	0.243	85.1	63.9	63.9	46.8

83	TCPT65	TCPT65 20S PC930 PSU HWB	2127	16.8	126.6	1.436	0.472	0.354	0.354	0.26	90.8	68.1	68.1	50.0
84	TCPT65	TCPT65 20S PC930 PSU HVWB	2127	16.8	126.6	1.436	0.472	0.354	0.354	0.26	90.8	68.1	68.1	50.0
85	TCPT65	TCPT65 20S PC930 PSU HMB FG	2127	16.8	126.6	1.436	0.472	0.354	0.354	0.26	90.8	68.1	68.1	50.0
86	TCPT65	TCPT65 20S PC930 PSU HWB FG	2042	16.8	121.6	1.436	0.493	0.37	0.37	0.271	94.9	71.2	71.2	52.2
87	TCPT65	TCPT65 20S PC930 PSU HVWB FG	2042	16.8	121.6	1.436	0.493	0.37	0.37	0.271	94.9	71.2	71.2	52.2
88	TCPT65	TCPT65 22S 830 PSU HMB	2042	16.8	121.6	1.436	0.493	0.37	0.37	0.271	94.9	71.2	71.2	52.2
89	TCPT65	TCPT65 22S 830 PSU HWB	2396	16.8	142.6	1.436	0.419	0.314	0.314	0.23	80.6	60.4	60.4	44.3
90	TCPT65	TCPT65 22S 830 PSU HVWB	2396	16.8	142.6	1.436	0.419	0.314	0.314	0.23	80.6	60.4	60.4	44.3
91	TCPT65	TCPT65 22S 830 PSU HMB FG	2396	16.8	142.6	1.436	0.419	0.314	0.314	0.23	80.6	60.4	60.4	44.3
92	TCPT65	TCPT65 22S 830 PSU HWB FG	2301	16.8	137.0	1.436	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
93	TCPT65	TCPT65 22S 830 PSU HVWB FG	2301	16.8	137.0	1.436	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
94	TCPT65	TCPT65 22S 840 PSU HMB	2301	16.8	137.0	1.436	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
95	TCPT65	TCPT65 22S 840 PSU HWB	2466	16.8	146.8	1.436	0.408	0.306	0.306	0.224	78.5	58.9	58.9	43.1
96	TCPT65	TCPT65 22S 840 PSU HVWB	2466	16.8	146.8	1.436	0.408	0.306	0.306	0.224	78.5	58.9	58.9	43.1

97	TCPT65	TCPT65 22S 840 PSU HMB FG	2466	16.8	146.8	1.436	0.408	0.306	0.306	0.224	78.5	58.9	58.9	43.1
98	TCPT65	TCPT65 22S 840 PSU HWB FG	2368	16.8	140.9	1.436	0.425	0.319	0.319	0.234	81.8	61.4	61.4	45.0
99	TCPT65	TCPT65 22S 840 PSU HVWB FG	2368	16.8	140.9	1.436	0.425	0.319	0.319	0.234	81.8	61.4	61.4	45.0
100	TCPT65	TCPT65 22S PC930 PSU HMB	2368	16.8	140.9	1.436	0.425	0.319	0.319	0.234	81.8	61.4	61.4	45.0
101	TCPT65	TCPT65 22S PC930 PSU HWB	2320	18.8	123.4	1.607	0.485	0.364	0.364	0.267	93.3	70.1	70.1	51.4
102	TCPT65	TCPT65 22S PC930 PSU HVWB	2320	18.8	123.4	1.607	0.485	0.364	0.364	0.267	93.3	70.1	70.1	51.4
103	TCPT65	TCPT65 22S PC930 PSU HMB FG	2320	18.8	123.4	1.607	0.485	0.364	0.364	0.267	93.3	70.1	70.1	51.4
104	TCPT65	TCPT65 22S PC930 PSU HWB FG	2228	18.8	118.5	1.607	0.505	0.379	0.379	0.278	97.2	72.9	72.9	53.5
105	TCPT65	TCPT65 22S PC930 PSU HVWB FG	2228	18.8	118.5	1.607	0.505	0.379	0.379	0.278	97.2	72.9	72.9	53.5
106	TCPT65	TCPT65 22S PW930 PSU HMB	2228	18.8	118.5	1.607	0.505	0.379	0.379	0.278	97.2	72.9	72.9	53.5
107	TCPT65	TCPT65 22S PW930 PSU HWB	2288	16.8	136.2	1.436	0.439	0.329	0.329	0.241	84.5	63.3	63.3	46.4
108	TCPT65	TCPT65 22S PW930 PSU HVWB	2288	16.8	136.2	1.436	0.439	0.329	0.329	0.241	84.5	63.3	63.3	46.4
109	TCPT65	TCPT65 22S PW930 PSU HMB FG	2288	16.8	136.2	1.436	0.439	0.329	0.329	0.241	84.5	63.3	63.3	46.4
110	TCPT65	TCPT65 22S PW930 PSU HWB FG	2197	16.8	130.8	1.436	0.458	0.344	0.344	0.252	88.1	66.2	66.2	48.5

111	TCPT65	TCPT65 22S PW930 PSU HVWB FG	2197	16.8	130.8	1.436	0.458	0.344	0.344	0.252	88.1	66.2	66.2	48.5
112	TCPT65	TCPT65 22S PW940 PSU HMB	2197	16.8	130.8	1.436	0.458	0.344	0.344	0.252	88.1	66.2	66.2	48.5
113	TCPT65	TCPT65 22S PW940 PSU HWB	2357	16.8	140.3	1.436	0.426	0.32	0.32	0.234	82.0	61.6	61.6	45.0
114	TCPT65	TCPT65 22S PW940 PSU HVWB	2357	16.8	140.3	1.436	0.426	0.32	0.32	0.234	82.0	61.6	61.6	45.0
115	TCPT65	TCPT65 22S PW940 PSU HMB FG	2357	16.8	140.3	1.436	0.426	0.32	0.32	0.234	82.0	61.6	61.6	45.0
116	TCPT65	TCPT65 22S PW940 PSU HWB FG	2263	16.8	134.7	1.436	0.444	0.333	0.333	0.244	85.5	64.1	64.1	47.0
117	TCPT65	TCPT65 22S PW940 PSU HVWB FG	2263	16.8	134.7	1.436	0.444	0.333	0.333	0.244	85.5	64.1	64.1	47.0
118	TCPT65	TCPT65 27S 830 PSU HMB	2263	16.8	134.7	1.436	0.444	0.333	0.333	0.244	85.5	64.1	64.1	47.0
119	TCPT65	TCPT65 27S 830 PSU HWB	2614	18.8	139.0	1.607	0.431	0.323	0.323	0.237	83.0	62.2	62.2	45.6
120	TCPT65	TCPT65 27S 830 PSU HVWB	2614	18.8	139.0	1.607	0.431	0.323	0.323	0.237	83.0	62.2	62.2	45.6
121	TCPT65	TCPT65 27S 830 PSU HMB FG	2614	18.8	139.0	1.607	0.431	0.323	0.323	0.237	83.0	62.2	62.2	45.6
122	TCPT65	TCPT65 27S 830 PSU HWB FG	2510	18.8	133.5	1.607	0.448	0.336	0.336	0.246	86.2	64.7	64.7	47.3
123	TCPT65	TCPT65 27S 830 PSU HVWB FG	2510	18.8	133.5	1.607	0.448	0.336	0.336	0.246	86.2	64.7	64.7	47.3
124	TCPT65	TCPT65 27S 840 PSU HMB	2510	18.8	133.5	1.607	0.448	0.336	0.336	0.246	86.2	64.7	64.7	47.3

125	TCPT65	TCPT65 27S 840 PSU HWB	2690	18.8	143.1	1.607	0.418	0.314	0.314	0.23	80.5	60.4	60.4	44.3
126	TCPT65	TCPT65 27S 840 PSU HVWB	2690	18.8	143.1	1.607	0.418	0.314	0.314	0.23	80.5	60.4	60.4	44.3
127	TCPT65	TCPT65 27S 840 PSU HMB FG	2690	18.8	143.1	1.607	0.418	0.314	0.314	0.23	80.5	60.4	60.4	44.3
128	TCPT65	TCPT65 27S 840 PSU HWB FG	2583	18.8	137.4	1.607	0.435	0.326	0.326	0.239	83.7	62.7	62.7	46.0
129	TCPT65	TCPT65 27S 840 PSU HVWB FG	2583	18.8	137.4	1.607	0.435	0.326	0.326	0.239	83.7	62.7	62.7	46.0
130	TCPT65	TCPT65 27S PW930 PSU HMB	2583	18.8	137.4	1.607	0.435	0.326	0.326	0.239	83.7	62.7	62.7	46.0
131	TCPT65	TCPT65 27S PW930 PSU HWB	2495	18.8	132.7	1.607	0.452	0.339	0.339	0.249	87.0	65.2	65.2	47.9
132	TCPT65	TCPT65 27S PW930 PSU HVWB	2495	18.8	132.7	1.607	0.452	0.339	0.339	0.249	87.0	65.2	65.2	47.9
133	TCPT65	TCPT65 27S PW930 PSU HMB FG	2495	18.8	132.7	1.607	0.452	0.339	0.339	0.249	87.0	65.2	65.2	47.9
134	TCPT65	TCPT65 27S PW930 PSU HWB FG	2396	18.8	127.5	1.607	0.469	0.352	0.352	0.258	90.3	67.7	67.7	49.7
135	TCPT65	TCPT65 27S PW930 PSU HVWB FG	2396	18.8	127.5	1.607	0.469	0.352	0.352	0.258	90.3	67.7	67.7	49.7
136	TCPT65	TCPT65 27S PW940 PSU HMB	2396	18.8	127.5	1.607	0.469	0.352	0.352	0.258	90.3	67.7	67.7	49.7
137	TCPT65	TCPT65 27S PW940 PSU HWB	2571	18.8	136.7	1.607	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
138	TCPT65	TCPT65 27S PW940 PSU HVWB	2571	18.8	136.7	1.607	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2

139	TCPT65	TCPT65 27S PW940 PSU HMB FG	2571	18.8	136.7	1.607	0.437	0.328	0.328	0.24	84.1	63.1	63.1	46.2
140	TCPT65	TCPT65 27S PW940 PSU HWB FG	2468	18.8	131.3	1.607	0.456	0.342	0.342	0.251	87.8	65.8	65.8	48.3
141	TCPT65	TCPT65 27S PW940 PSU HVWB FG	2468	18.8	131.3	1.607	0.456	0.342	0.342	0.251	87.8	65.8	65.8	48.3