



Lumec Square Lantern LED post top luminaires draw on the designs of yesteryear in order to evoke a feeling of harmony and warmth in any project. This series is another example of how Lumec melds feelings of old-time luminaires with modern lighting techniques and technology. It can complement many settings thanks to its two sizes and its internal components assure long life, reliability, and durability. The blend of form and function makes the **Square Lantern** luminaires an excellent choice for older neighborhoods or contemporary environments.

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Ordering guide

example: S26A-C-196L450WW-G2-ACDR-C-LE3-120-DMG-SP2-BKTX


Series	LED module	Gen. <b>G2</b>	Globe material <b>ACDR</b> Acrylic Globe <b>PC</b> Polycarbonate	Globe finish <b>C</b> Clear Globe	Optical system <b>3</b> Type III (ASYM) <b>5</b> Type V (SYMM)	Voltage <b>UNV</b> 120-277VAC <b>347</b> 347VAC <b>480</b> 480VAC	Options			Poles/Brackets	Finish
							Receptacle <b>RCD7<sup>3</sup></b> Receptacle for twist-lock photocell or shorting cap, 7-pin (optional)	Control <b>PH7<sup>2</sup></b> Photoelectric Cell button type <b>PH8<sup>4</sup></b> Twist-lock Photoelectric Cell <b>PH9<sup>4</sup></b> Shorting cap	Luminaire <b>SP2</b> 20kV / 10kA Surge Protector (optional) <b>TN2.875C</b> Fitter to fit over a 2-7/8" (73mm) O.D. by 4" (102mm) long tenon <b>TN3</b> Fitter to fit over 3" (76 mm) O.D. by 4" (102 mm) long tenon <b>TN3.5</b> Fitter to fit over 3-1/2" (89 mm) O.D. by 4" (102 mm) long tenon <b>WC</b> Without Cupola		
<b>S26A-C</b> <b>S26N-C</b> Square Lantern LED post top luminaire with Comfort optics	<b>3000K</b> 196L450WW 196L650WW 196L1150WW 196L1675WW 196L2100WW  <b>4000K</b> 196L450NW 196L650NW 196L1150NW 196L1675NW 196L2100NW	Gen2							Consult with <a href="http://signify.com/outdoorluminaires">signify.com/outdoorluminaires</a> for details and the complete line of Signify poles and brackets.	<b>Textured</b> <b>BE2TX</b> Midnight Blue <b>BE6TX</b> Ocean Blue <b>BE8TX</b> Royal Blue <b>BG2TX</b> Sandstone <b>BKTX</b> Black <b>BRTX</b> Bronze <b>GN4TX</b> Blue Green <b>GN6TX</b> Forest Green <b>GN8TX</b> Dark Forest Green <b>GNTX</b> Green <b>GY3TX</b> Medium Grey <b>RD2TX</b> Burgundy <b>RD4TX</b> Scarlet <b>WHTX</b> White  <b>Other</b> <b>GR</b> Gray Sandtex <b>NP</b> Natural Aluminum <b>TG</b> Hammerstone Gold	

1. Not available with 347V and 480V.  
 2. Not available with WC option.  
 3. If RCD7 is required you need to select WC without cupola. The RCD7 is located on top of the roof in place of the cupola for use with a control node.  
 4. RCD7 is required with Photocell and Shorting cap

# S26A-C/S26N-C Square Lantern LED Post Top


Urban luminaire with comfort optics

## Dimensions

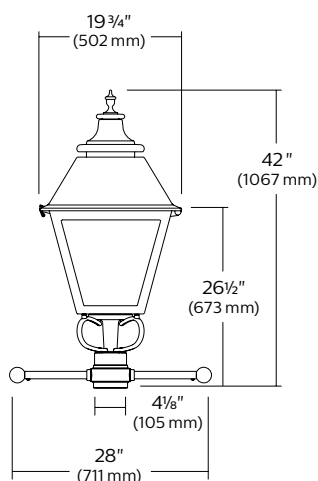


**S26A-C**

EPA: 2.97 sq ft  
Weight: 44 lbs (20 kg)

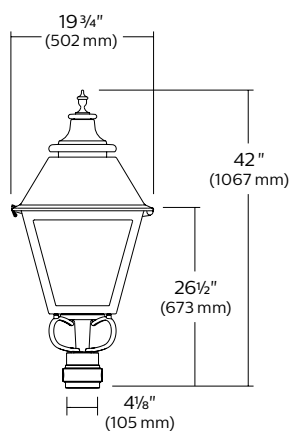

**S26N-C**

EPA: 3.25 sq ft  
Weight: 45 lbs (20.4 kg)

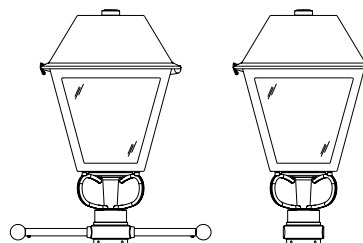

With RCD7 option

## 3000K Lumen Values

Ordering Code	Total LEDs	LED current (mA)	Color Temperature	Ave. System Wattage (W)	Type 3			Type 5		
					Lumen Output	Efficacy (Lm/W)	BUG Rating	Lumen Output	Efficacy (Lm/W)	BUG Rating
196L450WW-G2	196	450	3000	21	1793	85	B1-U2-G1	1720	82	B1-U2-G1
196L650WW-G2	196	650	3000	30	2570	86	B1-U2-G1	2467	82	B2-U2-G1
196L1150WW-G2	196	1150	3000	52	4429	85	B2-U3-G2	4250	82	B2-U3-G2
196L1675WW-G2	196	1675	3000	75	6086	81	B3-U3-G3	5841	78	B3-U3-G2
196L2100WW-G2	196	2100	3000	94	7327	78	B3-U3-G3	7031	75	B3-U3-G2

## 4000K Lumen Values

Ordering Code	Total LEDs	LED current (mA)	Color Temperature	Ave. System Wattage (W)	Type 3			Type 5		
					Lumen Output	Efficacy (Lm/W)	BUG Rating	Lumen Output	Efficacy (Lm/W)	BUG Rating
196L450NW-G2	196	450	4000	21	1976	94	B1-U2-G1	1896	90	B1-U2-G1
196L650NW-G2	196	650	4000	30	2833	94	B1-U2-G1	2719	91	B2-U2-G1
196L1150NW-G2	196	1150	4000	52	4883	94	B2-U3-G2	4686	90	B3-U3-G2
196L1675NW-G2	196	1675	4000	75	6710	89	B3-U3-G3	6439	86	B3-U3-G2
196L2100NW-G2	196	2100	4000	94	8077	86	B3-U3-G3	7751	82	B3-U3-G2

Actual performance may vary due to installation variables including optics, mounting/ceiling height, dirt depreciation, light loss factor, etc.; highly recommended to confirm performance with a layout - contact Applications at [signify.com/outdoorluminaire](http://signify.com/outdoorluminaire). Consult DLC QPL to confirm your specific fixture selection is DLC approved. Note: Some data may be scaled based on tests of similar but not identical luminaires.

# S26A-C/S26N-C Square Lantern LED Post Top

## Urban luminaire with comfort optics

### Specifications

#### Housing

**Finial:** Decorative cast 356 aluminum, mechanically assembled.

**Cupola:** Decorative spun aluminum 1100 O, mechanically mounted on hood.

**Hood:** In a square tapered shape, the hood is made of a one-piece die cast injection molded A360 aluminium. Mechanically assembled to the guard.

**Guard:** In a square tapered shape, the guard is made of one-piece die cast injection molded A360 aluminium.

#### Access-mechanism

Two integrated hinges on the hood with a stopper and a latch shall offer a tool-free access to the inside of the luminaire. An embedded memory-retentive gasket shall ensure weatherproofing.

#### Light engine

Light guide technology provides low-glare, uniform illumination. Composed of 196 LEDs strategically positioned on the edge of the optical plate. Light engine luminous opening size optimized to best achieve a balance between lumen output and optical performance with the need to provide visual comfort. Light engine frame ensures contact with housing to provide heat conduction and sealing against the elements. Light engine is RoHS compliant. Maximum ambient operating temperature up to 40°C(104°F). Standard color temperatures: 3000K +/- 130K, 4000K +/- 130K, Minimum CRI of 80. Also available in 2700K, 3500K, 5000K and Amber (>590nm) with extended lead times. Contact factory for details.

#### Optical system

The advanced LED comfort optical system provides standar Types 3 and 5. Also available in Types 1, 2 and 4 with extended lead times. Contact factory for details. Composed of high performance UV-stabilized optical grade lens with molded micro-optics to achieve desired distribution optimized to get a exceptional lighting uniformity. Performance tested per LM-79 and TM-15 (IESNA) certifying its photometric performance. Street side indicated.  
**LE3** - Type III (ASYM)  
**LE5** - Type V (SYMM)

#### Globe/Panel

**ACDR-C:** Made of one-piece seamless injection-molded clear impact-resistant (DR) acrylic. The globe is assembled on the access-mechanism.

**PC-CS:** Made of one-piece seamless injection-molded satin clear polycarbonate. The globe is assembled on the access-mechanism.

#### Driver

Driver comes standard with dimming compatible 0-10V. High power factor of 90% minimum. Electronic driver, operating range 50/60 Hz. Auto adjusting universal voltage input from 120 to 277 or 347 to 480 VAC rated for both application line to line or line to neutral, Class I, THD of 20% max. Maximum ambient operating temperature from 40°F (40°C) to 130°F (55°C).

Certified in compliance to UL1310 cULus requirement. Dry and damp location. Assembled on a unitized removable tray with Tyco quick disconnect plug resisting to 221°F (105°C). The current supplying the LEDs will be reduced by the driver if the driver experiences internal overheating as a protection to the LEDs and the electrical components. Output is protected from short circuits, voltage overload and current overload. Automatic recovery after correction. Standard built in driver surge protection of 2.5kV (min).

#### Driver options

**DMG:** Dimmable driver 0-10V.

**SRD:** Sensor Ready Driver including SR communication (used for dimming and other functionalities), 24V auxiliary supply and a logical signal input (LSI) connected to the top NEMA twist lock receptacle.

**SRD1:** Sensor Ready Driver including SR communication (used for dimming and other functionalities) but with 24V auxiliary supply and a logical signal input (LSI) not connected to the top NEMA twist lock.

#### Surge protector

Surge protector tested in accordance with ANSI/IEEE C62.45 per ANSI/IEEE C62.41.2 Scenario I Category C High Exposure 10kV/10kA waveforms for Line Ground, Line Neutral and Neutral Ground, and in accordance with U.S. DOE (Department of Energy) MSSLC (Municipal Solid State Street Lighting Consortium) model specification for LED roadway luminaires electrical immunity requirements for High Test Level 10kV / 10kA. SP2 20kV/20kA optional.

#### Heat sink

Made of cast aluminum optimizing the LEDs efficiency and life. Product does not use any cooling device with moving parts (only passive cooling device).

#### Hardware

All exposed screws shall be complete with Ceramic primer-seal base coat to reduce seizing of the parts and offers a high resistance to corrosion. All seals and sealing devices are made and/or lined with EPDM and/or silicone and/or rubber.

#### Luminaire useful life

Refer to IES files for energy consumption and delivered lumens for each option. Based on ISTMT in situ thermal testing in accordance with UL1598 and UL8750, using LM-80 data from LED manufacturers and engineering prediction methods, the luminaire useful life is expected to reach 100,000+ hours with >L70 lumen maintenance @ 25°C. Luminaire Useful Life accounts for LED lumen maintenance AND all of these additional factors including: LED life, driver life, PCB substrate, solder joints, on/off cycles, burning hours and corrosion. Entire luminaire is rated for operation in ambient temperature of -40°C / -40°F up to +35°C / +95°F.

#### Wiring

Gauge (#14) TEW/AWM 1015 or 1230 wires, 6" (152mm) minimum exceeding from luminaire.

#### LED products (manufacturing standard)

The electronic components sensitive to electrostatic discharge (ESD) such as light emitting diodes (LEDs) are assembled in compliance with IEC61340 5 1 and ANSI/ESD S20.20 standards so as to eliminate ESD events that could decrease the useful life of the product.

#### Quality control

Manufactured to ISO 9001 2015 standards and ISO 14001-2015 International Quality Standards Certification.

#### Certifications and Compliance

cULus Listed for Canada and USA.

### Predicted Lumen Depreciation Data

Predicted lumen depreciation data <sup>1</sup>				
Ambient Temperature (°C)	Driver (mA)	Calculated L <sub>70</sub> hours <sup>1,2</sup>	L <sub>70</sub> per TM-21 <sup>2,3</sup>	Lumen Maintenance % @ 60,000 hours
25°C	up to 2100 mA	>100,000	>60,000	84%

1. Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions.  
2. L<sub>70</sub> is the predicted time when LED performance depreciates to 70% of initial lumen output.  
3. Calculated per IESNA TM21-11. Published L<sub>70</sub> hours limited to 6 times actual LED test hours.

# S26A-C/S26N-C Square Lantern LED Post Top

## Urban luminaire with comfort optics

### Specifications (continued)

#### Luminaire options



**LF**  
Lily-flower  
decorative cap



**PH7** Photoelectric cell button type

**SP2** 20kV/20kA integral surge protector (optional)


**WC** Without Cupola




**RCD7**  
Receptacle  
7-pins



**TN2.875C**  
2-7/8" dia.  
tenon adaptor



**TN3**  
3" dia.  
tenon adaptor



**TN3.5**  
3-1/2" dia.  
tenon adaptor

#### Finish

In accordance with the AAMA 2603 standard. Application of polyester powder coat paint (4 mils/100 microns) with +/- 1 mils/24 microns of tolerance. The Thermosetting resins provides a discoloration resistant finish in accordance with the ASTM D2244 standard, as well as luster retention in keeping with the ASTM D523 standard and humidity proof in accordance with the ASTM D2247 standard. The surface treatment achieves a minimum of 2000 hours for salt spray resistant finish in accordance with testing performed and per ASTM B117 standard.


#### Textured Finish Options:

**BE2TX:** Textured Midnight Blue  
**BE6TX:** Textured Ocean Blue  
**BE8TX:** Textured Royal Blue  
**BG2TX:** Textured Sandstone  
**BKTX:** Textured Black  
**BRTX:** Textured Bronze  
**GN4TX:** Textured Blue Green  
**GN6TX:** Textured Forest Green  
**GN8TX:** Textured Dark Forest Green  
**GNTX:** Textured Green  
**GY3TX:** Textured Medium Grey  
**RD2TX:** Textured Burgundy  
**RD4TX:** Textured Scarlet  
**WHTX:** Textured White

#### Non-Textured Finish Options:

**GR:** Gray Sandtex  
**NP:** Natural Aluminum  
**TG:** Hammer-tone Gold

#### Assembly example

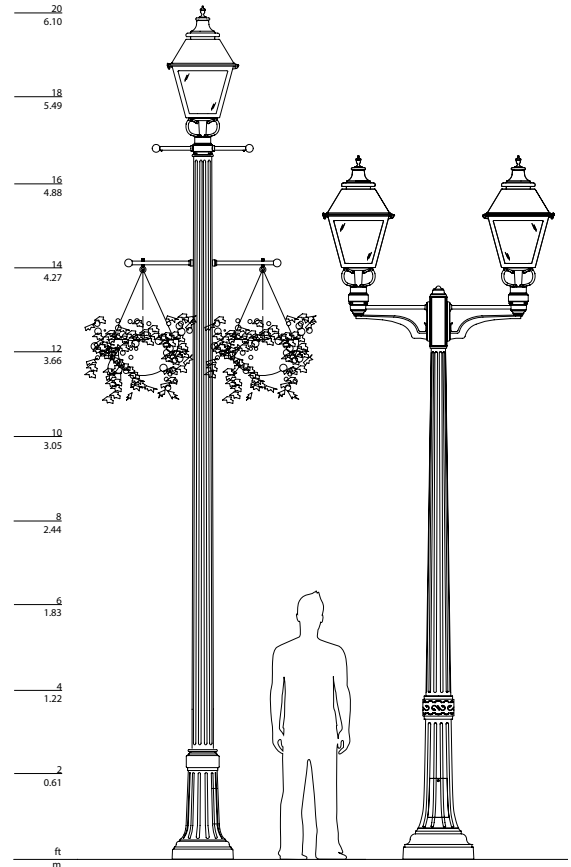

**S26A-C**  
Luminaire: S26A -C  
Pole: RTA900-PS

**S26N-C**  
Luminaire: S26N-C  
Mounting: CRC-2  
Pole: R74

Consult [signify.com/outdoorluminaires](http://signify.com/outdoorluminaires) for details and the complete line of Signify poles and brackets.

