# A floodlight of practical design and exceptional performance





Floodlighting





The Gardco Designer Flood LED combines impressive floodlighting performance and control with the efficiency and energy savings of the LED source. Based on the popular Designer Floodlight Series, this new line of architectural luminaires is specifically designed for advanced LED arrays.

LEDs are significantly more sensitive and operate differently than HID systems. Simply placing LEDs into existing luminaires is almost certain to reduce LED life and adversely affect performance. The housing of the Designer Flood LED provides advanced thermal management to dissipate heat, thereby maximizing the inherent sustainability of the LED source.

While the housing shape is redesigned to better suit the source, the best elements of the Designer Floodlight Series are retained, including the die cast aluminum construction, rugged mounting knuckle, integral splice box, and tamper-resistant fasteners, all protected by a textured polyester powdercoat finish, silicone seals and moisture-proof gasketing.

Whether ground, wall, ceiling or pole mounted, its timeless form is always appropriate, comfortably blending into its surroundings. It is performance, however, that distinguishes Gardco and the Designer Flood LED. When used in place of HID systems, the Designer Flood LED offers significant energy savings.

Numerous precision optical systems are available, delivering the right pattern for any application. Free from streaks and striations, these distributions place the intended target in its best light. But having the right distribution pattern is only half of the battle. Frequently, setback considerations and architectural limitations make placing the luminaire extremely challenging. With its numerous mounting options, the Designer Flood LED addresses these concerns practically and handsomely. Mounting accessories are specifically designed to complement the luminaire, and with its integral splice box, the luminaire can be mounted flush at grade. Combined with 358° horizontal and 180° vertical rotational ability, you have a precision lighting instrument that can only come from Gardco.





## Intelligent Construction

The low-level environment is extremely severe. Vandalism, landscaping equipment and Mother Nature combine to gradually destroy everything within its grasp. And yet it is also a setting where the luminaire is most often seen, with mounting positioned nearer to the users of the site. A luminaire must be solid and durable if it is to survive in these harsh surroundings.



#### Heavy Duty Knuckle

The knuckle is the Achilles' Heel of the common floodlight, where even a minor impact can break or bend the assembly. Gardco's structural, die cast aluminum knuckle integrally supports the luminaire and withstands abusive treatment.

Durable and practical construction features are a hallmark of all Gardco products, including the Designer Flood LED. Die cast aluminum construction ensures precise mating of the luminaire components and provides for long-lasting operation. Deep integral airways direct airflow around the luminaire serving to dissipate heat, crucial to long LED life. The luminaire is thoroughly sealed and gasketed at all points of entry and material transition to exclude moisture, dust, contaminants and insects. Textured polyester powdercoat finishes repel moisture, corrosives and ultraviolet rays. Every luminaire is thoroughly tested to ensure proper electrical operation.



#### Integrated J-Box

Wire splices are made in the spacious splice compartment, which is suitable for through-circuit wiring. No auxiliary junction box is required, allowing for at-grade mounting. Fully gasketed providing a cULus Wet Location seal.



#### **Easily Adjustable**

A single hex head bolt is tightened to secure the luminaire's tilt. Incremental 5° tick marks are provided in the casting to allow for precise aiming and to facilitate the alignment of multiple luminaires.



### LED performance offering significant energy savings versus HID

The primary assessment of a sophisticated floodlight is performance. The needs are simple: provide practical distribution patterns that feature clean, unstriated illumination, allow for wide luminaire spacings and minimize brightness at normal viewing angles. The Gardco Designer Flood LED accomplishes this with numerous precision optical systems, each providing distinct visual cutoff to the LED source at normal viewing angles. The DFC7 features a cutoff hood to further control unwanted brightness.

#### Spot 'SP' (NEMA 2x2)

**Applications:** Wall Grazing, Columns, Statues and Monuments, Bridges



20' Setback, 0° Tilt 50% Main Beam: 15°H x 15°V 10% Field Beam: 24°H x 24°V

#### Rectangular Spot 'RSP' (NEMA 3x3)

**Applications:** Flags, Signage, Statues



20' Setback, 0° Tilt 50% Main Beam: 22°H x 13°V 10% Field Beam: 40°H x 30°V

#### Asymmetric 33° Flood 'A33 (NEMA 6 x 5)

**Applications:** Area Lighting, Facade (10-20') Courtyard, Vertical Signage




0' Setback, 0° Tilt 0% Main Beam: 81°H x 38°V 0% Field Beam: 119°H x 77°V



10' Setback, 60° Tilt 50% Main Beam: 81°H x 38°V 10% Field Beam: 119°H x 77°V

#### Rectangular Medium 'RM' (NEMA 7 x 4)

Applications: General Area, Ground-Mounted Signage, Atriums, Facade (One-Story)




20' Setback, 0° Tilt 50% Main Beam: 81°H x 39°V 10% Field Beam: 119°H x 77°V




5' Setback, 25° Tilt 50% Main Beam: 81°H x 39°V 10% Field Beam: 119°H x 77°V

#### Rectangular Narrow 'RN' ( NEMA 7 x 5)

**Applications:** Facade (30-50'), Signage, Wall Grazing, Ceilings



20' Setback, 0° Tilt 50% Main Beam: 138°H x 41°V 10% Field Beam: 148°H x 75°V



15' Setback, 45° Tilt 50% Main Beam: 138°H x 41°V 10% Field Beam: 148°H x 75°V

#### Ordering guide

Prefix Distribution	Number of LEDs Drive Current	Color Temperature Voltage	Finish	Options
DFL7 Designer Floodlight LED 7" with Standard Flat Door DFC7 Floodlight Flat Door DFC7 Floodlight LED 7" with Standard Cutoff Hood Cutoff Hood	16L    16 LEDs    350    350mA      530    530mA      700    700mA      900    900mA      1A    1Amp      1.2A    1.2 Amp      32L    32 LEDs    350    350mA      700    700mA    900    900mA      900    900mA    100    700mA      900    900mA    900    900mA	CW-G2    Cool White 5000K, 70 CRI Generation 2    UNV    120-277V (50/60Hz)      NW-G2    Neutral White 4000K, 70 CRI Generation 2    HVU    347-480V (50/60Hz)      WW-G2    Warm White 3000K, 70 CRI Generation 2    208    208V      WW-G4    Warm White 3000K, 70 CRI Generation 2    240    240V      277    277V    347    347V      480    480V    480V	Textured    BK  Black    WH  White    BZ  Bronze    DGY  Dark Gray    MGY  Medium Gray    Customer specified    RAL  Specify optional colo or RAL (ex: OC-LGP or OC-RAL7024)	none  Leave blank    DD  0-10V Dimming Driver (controls by others)    PCB  Photocontrol Button    ESB  Extended Splice Box    Fusing

**Mounting Accessories** (order separately, field installed) \_ Leave blank (no Mounting option; Floodlight fits directly on 1-1/2" (1.9" or 48.3mm O.D.) rigid conduit) C RIGID Stub-up Rigid Conduit Mount. For direct mounting to (2) 1/2" (1.27cm) or 3/4" (1.91cm) CONDUIT MT rigid conduit such as GRC Galvanized Rigid Steel Conduit, IMC Intermediate Metal (F) Conduit, etc. No j-box required. Must use factory supplied mounting insert when setting stub-ups. J J-BOX MT (F) J-Box Mount. For mounting onto weather-proof J-box (by others) W WALL/CEIL. Wall/Ceiling Canopy Mount. For mounting over (not to) a 4" recessed outlet box. When mounted on vertical surface, provides vertical aiming from straight down to 100° MT (F) up from nadir. When mounted on a vertical surface, long axis of luminaire must be horizontal (+/-30°). Mounts directly to wall or ceiling. The surface structure must be suitable to support the luminaire. Only suitable for use on non-combustable surfaces. Wall Mount Bullhorn. For mounting over (not to) a 4" (10.16cm) recessed outlet box. WMB WALL MT BULLHORN (F) Provides full axial 180° vertical and 358° rotational aiming. Mounts direct to wall. Surface structure must be suitable to support the assembly. Outer end of WMB must be in the "straight up" position, as shown in diagram on page 3. Luminaire mounts with the knuckle below the body of the luminaire only. Wall Arm Mount. For mounting over (not to) a 4" (10.16cm) recessed outlet box. W90 WALL ARM MT (F) Provides full axial 180° vertical and 358° rotational aiming range. Mounts direct to wall. Surface structure must be suitable to support the luminaire. When mounted in wet locations, luminaire must be mounted as shown in diagrams on page 3. In damp or dry locations, arm assembly may be inverted. Accessories

ST 18" Stanchion Mount. 18" (45.72cm) high

(order separately, field installed)

Additional Mounting Accessories

(Must supply color chip for required

factory quote)

STANCHION (F)	stanchion Mount. 18" (45.72cm) high stanchion for in-ground concrete burial mounting.
ST/SM 18" (F)	Surface Mount Stanchion. For mounting to 18" (45.72cm)high stanchion pole assembly.
PTA (F)	Pole top 2-3/8" (6.03cm) tenon adapter
TAB TWIN ARM BRKT (F)	Twin arm bracket for use with ST, SM, or PTA
PT2 DUAL HEAD ADPTR (F)	Pole top 2-3/8" (6.03cm) tenon adapter for twin back to back luminaire mounting.

example: DFL7-A33-32L-900-NW-G2-UNV-DGY-SP2

Surge Protection

blank 10kV / 10kA (standard)

SP2 20KV 10KA 120-277VAC

SP2HV 20KV 10KA 347-480VAC

Prior to ordering, consult specification sheets on gardcolighting.com for the most current information, notes, and exclusions.

example)

#### Dimensions


PSO

WG

(order separately, field installed)

Wire Guard


Offset Polycarbonate Flat Shield

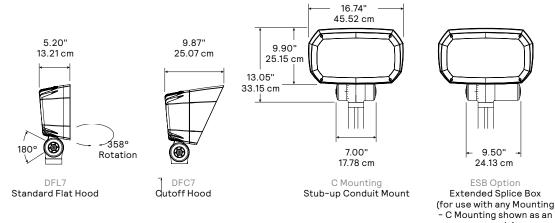



Designer Flood	EPA		
LED 7" Pole Loading Data	DFL7	DFC7	
Single Luminaire	1.5 ft²	1.8 ft <sup>2</sup>	
on PTA Adapter	0.14m²	0.17m <sup>2</sup>	
Twin Luminaires	2.1 ft²	2.7 ft²	
on PTA Adapter	0.20m²	0.25m²	
Twin Luminaires	3.2ft²	3.9 ft <sup>2</sup>	
on TAB Adapter	0.30m²	0.37m <sup>2</sup>	
Approximate Single Luminare Weight	19 lbs 8.62 kg	20.5 lbs 9.30 kg	

#### 4 Gardco

#### Dimensions

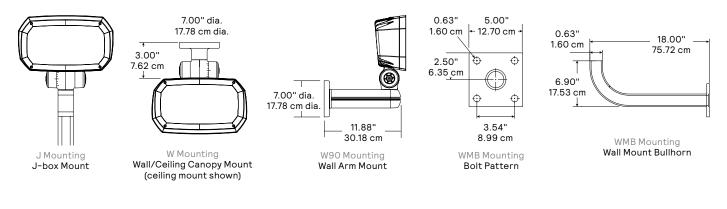

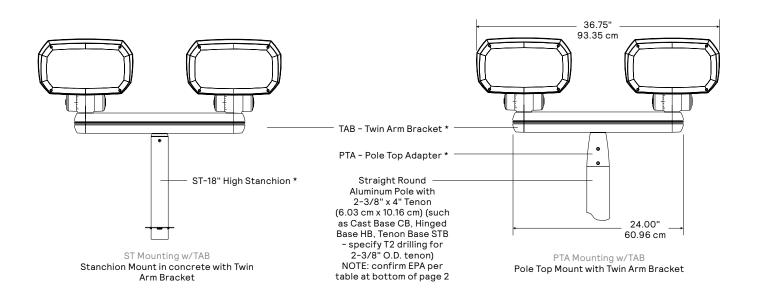

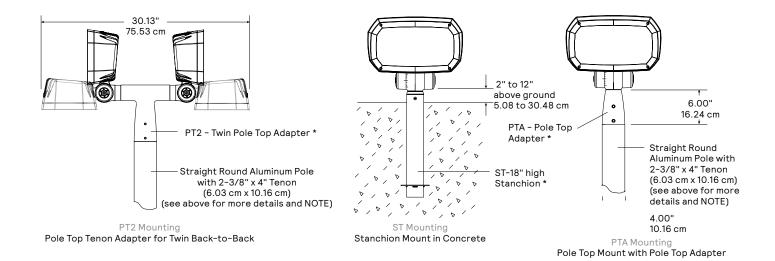

\* Order mounting accessories separately.

## (s)ignify

© 2023 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Signify North America Corporation 400 Crossing Blvd, Suite 600 Bridgewater, NJ 08807 Telephone 800-555-0050

l trademarks are owned by Signify Holding or their respective owner

Signify Canada Ltd. 281 Hillmount Road, Markham, ON, Canada L6C 2S3 Telephone 800-668-9008