

# INSTRUCTIONS FOR LYTESPAN PENDANT ADAPTER

INSTRUCTION SHEET NO

# IS: 7599


0781

## READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE.

This fixture is intended for installation in accordance with the National Electrical Code or local or federal code specifications. To prevent electrical shock, turn off electricity at fuse box before proceeding.


### A. CORD PENDANT MOUNTING (SUPPORTS UP TO 10 LBS.)

1. Unscrew LEVER. Pull out PLUG ASSEMBLY and SHORT INSULATOR from PLUG HOUSING. Fig. 1.
2. Unscrew STRAIN RELIEF CAP and GROUND CLIP assembly from PLUG HOUSING. Fig. 1.
3. Cut CORD to desired length and strip wires as shown in Fig 2.
4. See "wiring procedure" below

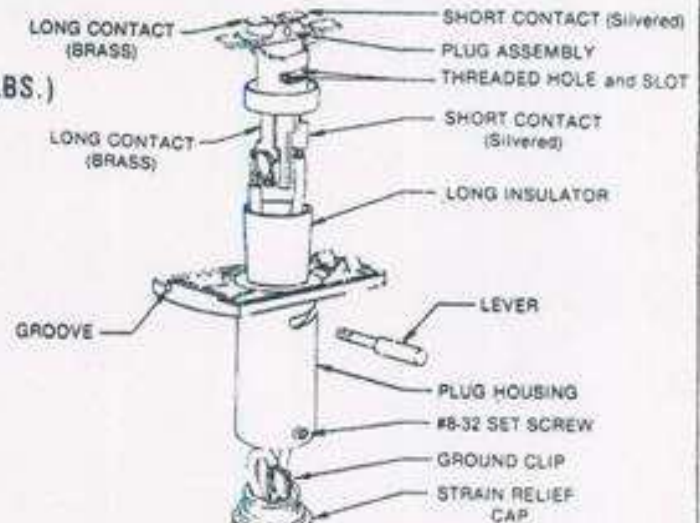

### B. STEM MOUNTING USING 1/2" O.D. TUBING (SUPPORTS UP TO 25 LBS.)

1. Unscrew LEVER, pull out PLUG ASSEMBLY and SHORT INSULATOR from PLUG HOUSING. Unscrew STRAIN RELIEF CAP and GROUND CLIP assembly from PLUG HOUSING. Remove the GROUND CLIP and PLASTIC BUSHINGS. Fig. 1 and 5.
2. Use STEM TUBING with 1/4-18 pipe thread 1/2" long (not supplied). Screw STEM TUBING into STRAIN RELIEF CAP and lock it with 1/4-20 SET SCREW. Fig. 3.  
**NOTE:** If ground wire is used, replace GROUND CLIP into STRAIN RELIEF CAP.
3. See "wiring procedure" below.

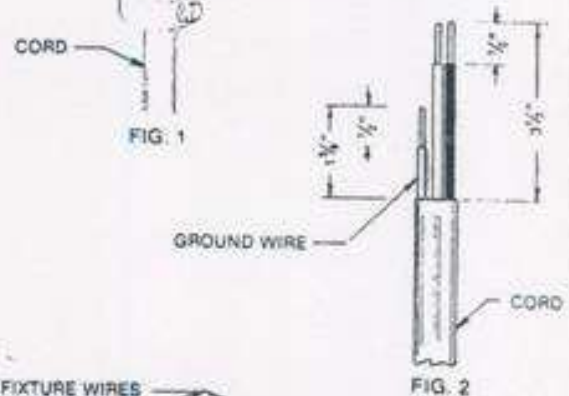

### C. CHAIN MOUNTING (SUPPORTS UP TO 25 LBS.)

1. Unscrew LEVER. Pull out PLUG ASSEMBLY and SHORT INSULATOR from PLUG HOUSING. Unscrew STRAIN RELIEF CAP and GROUND CLIP assembly from PLUG HOUSING. Remove the ground clip and PLASTIC BUSHINGS. Fig. 1 and 5.
2. Use CHAIN LOOP with 1/4-18 male pipe thread 1/2" long (not supplied). Screw CHAIN LOOP into STRAIN RELIEF CAP and lock it with 1/4-20 SET SCREW. Fig. 4.  
**NOTE:** If ground wire is used, replace GROUND CLIP into STRAIN RELIEF CAP.
3. See "wiring procedure" below.

