


TOP SECTIONED VIEW

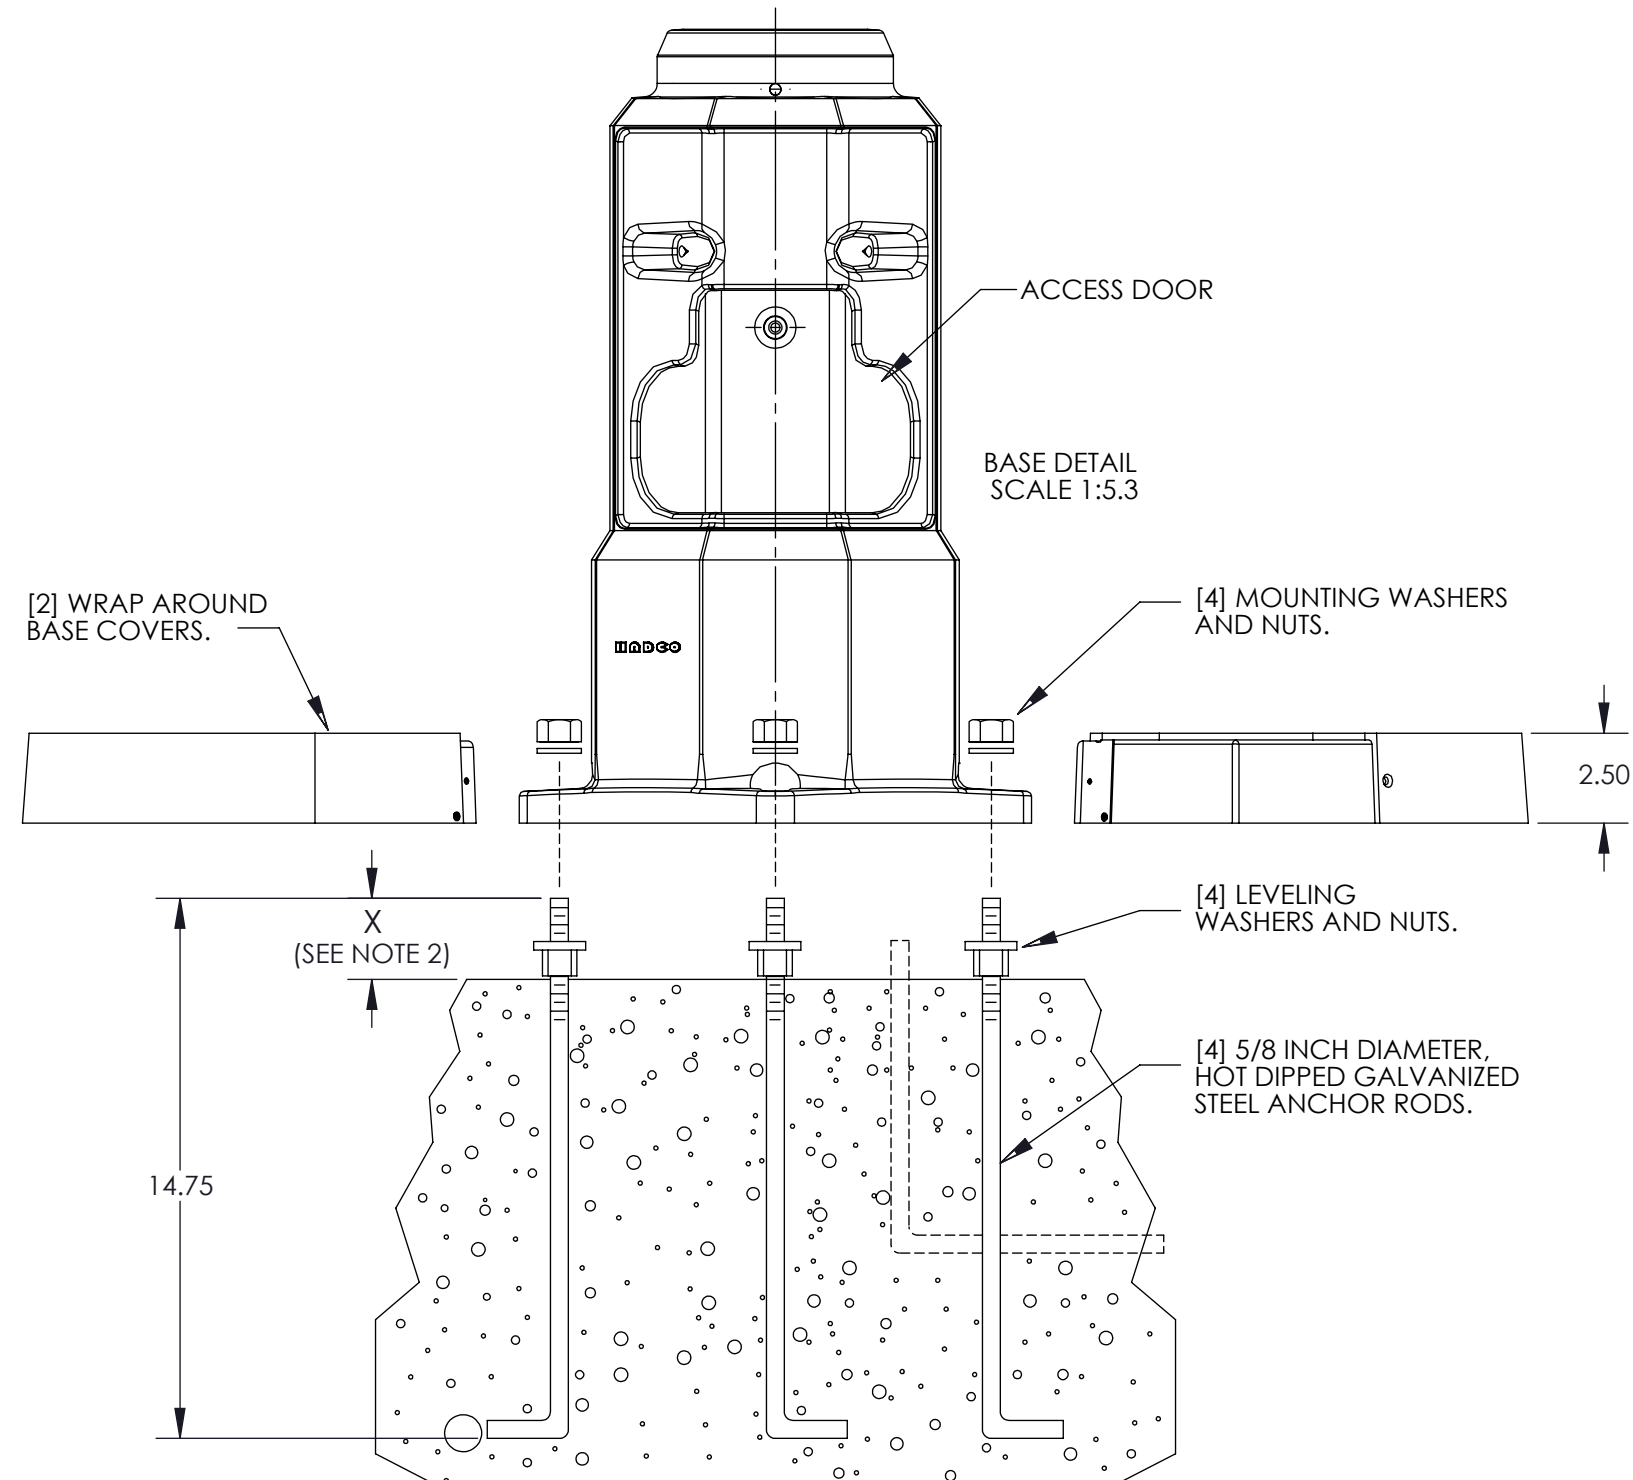

NOTES:

- 1 SUGGESTED BOLT CIRCLE; 12 INCH DIAMETER
MAXIMUM BOLT CIRCLE; 12 3/4 INCH DIAMETER
MINIMUM BOLT CIRCLE; 11 3/8 INCH DIAMETER
- 2 PHILIPS STRONGLY RECOMMENDS USING LEVELING NUTS TO MOUNT THE POST BASE. IF FOUNDATION IS NOT LEVEL, INCREASE "X" DIMENSION ACCORDINGLY WHEN USING LEVELING NUTS WITH WASHERS.

X = 2 5/8" INCHES WITH LEVELING NUTS.
WITH USE OF LEVELING NUTS, GAP BETWEEN BASE COVER AND CONCRETE COULD BE UP TO 5/8".
X = 2" INCHES WITHOUT LEVELING NUTS.
- 3 IF USING GROUTING TO CONCEAL GAP BETWEEN BASE AND FOUNDATION, ALLOW FOR WATER DRAINAGE.
- 4 BASE COVER DIMENSIONS:
2 3/8 INCH HIGH [INTERNALLY].
11 3/4 INCH SQUARE.
16 5/8 INCH ACROSS CORNERS.

WARNING
NOT TO SCALE
CONSULT FACTORY FOR
FULL SIZE TEMPLATE.

PHILIPS 100 Craftway, P.O. Box 128 Littletown, Pennsylvania 17340-0128		CONFIDENTIAL: This drawing is confidential and proprietary to Philips and may not be reproduced in whole or in part without the express written consent of Philips. All rights reserved. © 2011 by Philips Electronics.		TITLE: TEMP_AR_P1700 SERIES, NEW
UNLESS OTHERWISE SPECIFIED: * ALL DIMENSIONS ARE IN INCHES. * ALL THREADS ARE UNC-2B OR UNF-2B AFTER COATING. * ALL THREADS ARE TO BE VERIFIED WITH A THREAD GAGE.	DRAWN BY: J. WOJTKOWIAK CHECKED BY: B. DORON APPR BY: M. S. PRESSEL	DATE: 9/23/02 DATE: 8/4/09 DATE: 10/2/02	DRW SIZE: D	MATERIAL: 17 X 22 WHITE BOND PAPER.
* DO NOT SCALE THIS DRAWING *		EF-04-01-11 Rev.09	SCALE 1:1	SHEET 1 OF 1
PART NO:		101000552		