

# CHLORIDE

by  Signify



## Exit/Emergency


CE series

Edge-lit LED exit sign



Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat.No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

### Example: CEE1RWADA

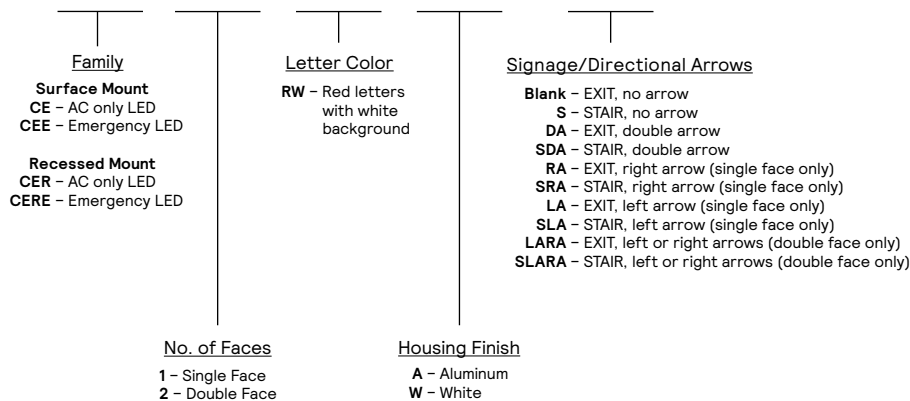

### codes and standards

- UL listed to standard 924
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code)
- OSHA standards
- City of Chicago codes
- UL listed for damp locations 32°F (0°C) to 122°F (50°C)

### construction

- Premium-grade, extruded aluminum housing.
- Recessed housing is easily detached from below, allowing easy access for service or maintenance.
- Panels are UV stable, silk screened acrylic which provides consistent, uniform illumination.
- Housings are available in a white finish or aluminum finish.
- Panels are supplied with red letters on white backgrounds.
- Signs available as single or double faced.

### installation

- Surface mounted signs are provided with a die-cast aluminum mounting canopy for universal ceiling, end or wall mounting.
- Recessed mounted signs are drywall, drop-thru ceiling mounted.
- Recessed units cannot be end mounted.

### electronics

- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Low Voltage Battery Disconnect protects the battery from being severely damaged by deep discharge during prolonged power failures.
- Emergency exit signs feature a fully automatic charger designed to recharge the battery within 24 hours.
- 120/277V dual input.
- Power Consumption:  
AC Models: 120 Volt Max. Watts 4.3W, Max. Amps 0.04A; 277 Volt Max. Watts 4.7W, Max. Amps 0.02A.  
Emergency Models: 120 Volt Max. Watts 4.5W, Max. Amps 0.04A; 277 Volt Max. Watts 4.5W, Max. Amps 0.02A.

### LED

- Exit face illumination is provided by an ultra-bright, energy efficient, long lasting white LEDs that provide uniform illumination.
- Uniform 6" letter illumination (3/4" stroke).

### battery

- Maintenance free sealed nickel cadmium battery.
- Provides a minimum of 90 minutes emergency illumination while in the emergency mode.



### warranty

- Five year warranty.





# CE Edge-lit LED exit sign

## Surface Mount

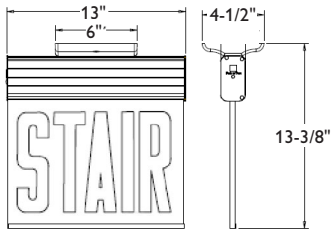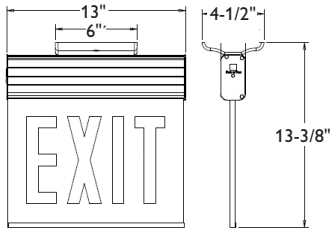

## Recessed Mount

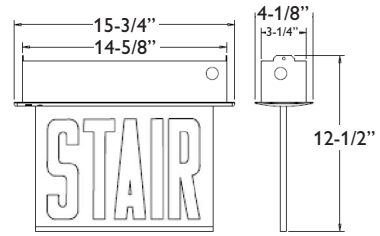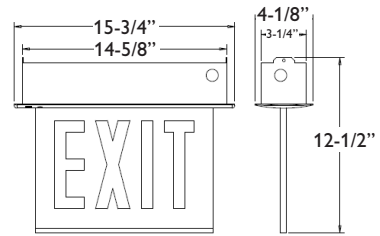

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

