Downlighting


LIGHTOLIER

by (s) ignify

Lytecaster Low Voltage 3 3/4"

2022LV MR16 Eyeball Trim

Project:		
Location:		
Cat.No:		
Туре:		
Lamps:	Qty:	
Notes:		

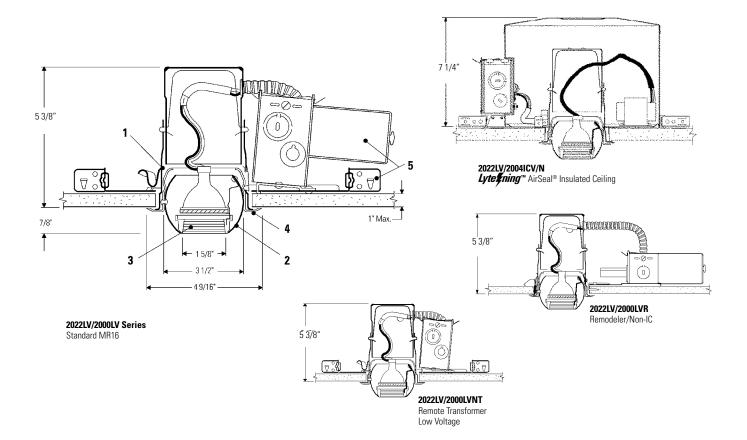

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets Low Voltage				
	Frame-In Kit	Installation Type	Lamping	Height	
2022LV Matte White	2000LV	Standard Non-IC		5 3/8"	
w/Black Baffle	2000LVR	Remodeler Non-IC		5 3/8"	
	2000LVRE1	Remodeler Non-IC		5 3/8"	
	2000LVE1	Electronic Low Voltage Non-IC 120V	20W-50W MR16	5 3/8"	
	2000LVE2	Electronic Low Voltage Non-IC 277V		5 3/8"	
	2004ICV/N	Lytening AirSeal® IC	20W-37W MR16	7 1/4"	
	2000LVNT	Low Voltage Remote Transformer	20W-42W MR16	5 3/8"	
	2000AICV	AirSeal® IC	20W-35W MR16	7 5/16"	
	I	T. Control of the Con	l .		

2022LV Lytecaster Low Voltage 3 3/4"

MR16 Eyeball Trim

Features

- 1. Housing: Hydroformed aluminum, .040" thick (18 ga.).
- Eyeball Housing: Die-formed, one piece, aluminum, .040" thick (18 ga.). Provides 358'horizontal rotation and 0° to 45° vertical adjustment; matte white or polished brass finish
- Step Baffle: Die-cast aluminum with stepped conical surface for low brightness; precision-fitted into eyeball housing; matte black finish.
- Trim Flange: Die-formed, aluminum .040" thick (18 ga.). Matte white or polished brass finish.
- Frame-In Kit: (2000LV standard frame shown) Other frames shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

Retaining Clips: 1955 - For Installing in Existing Ceiling

Labels

UL (Suitable for Damp Locations), I.B.E.W

