




Dimensions







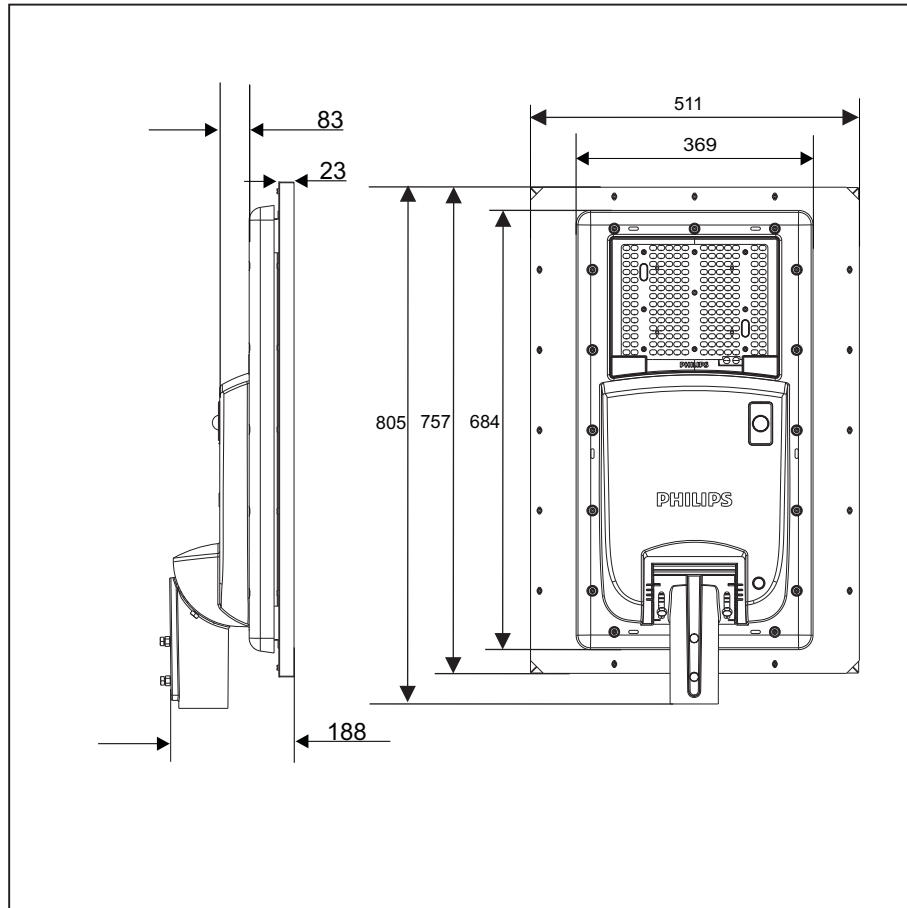


Solar Street Luminaire

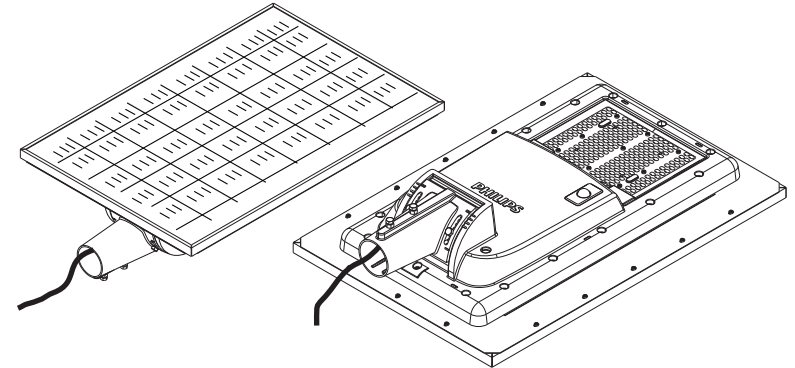

4415 109 22980

Type	: BRP710
Lamp	: LED (4500, 6000 Lumen)
Voltage	: 12.8 V DC
IP Classification	: IP 65
Net Weight	: 19 Kg
Max. Projected Area	: 0.411 m ²
Application	: Solar Street Light

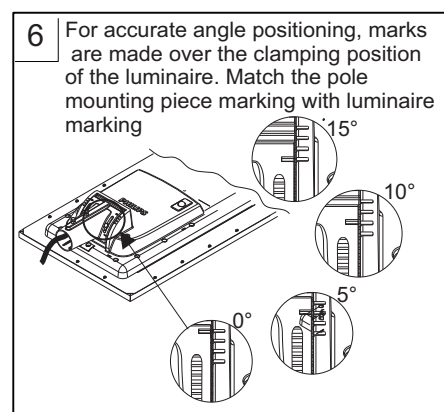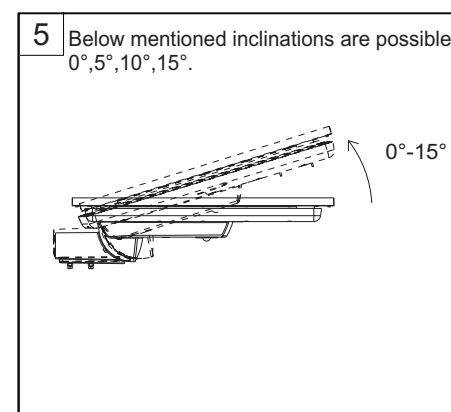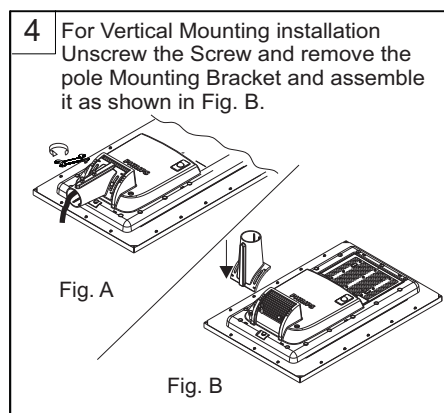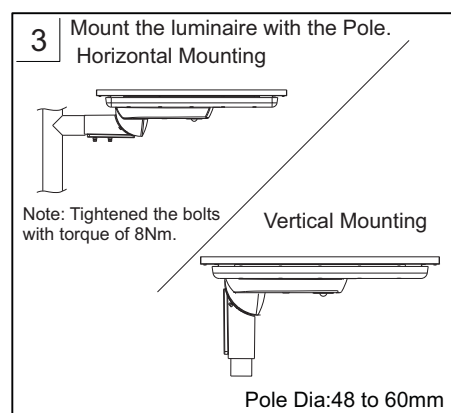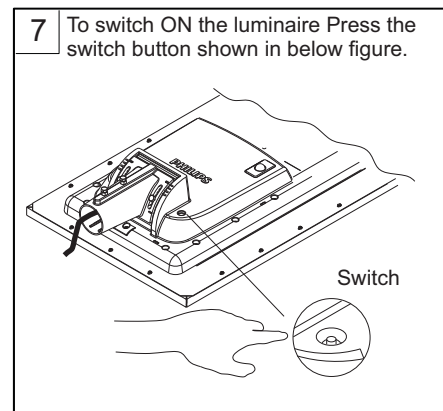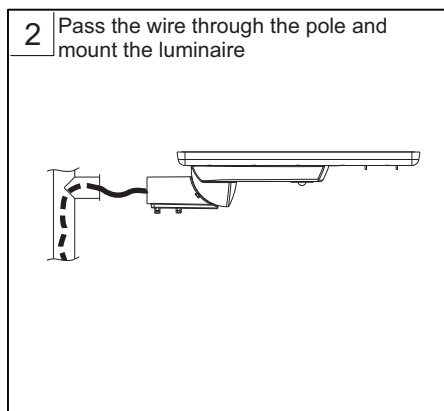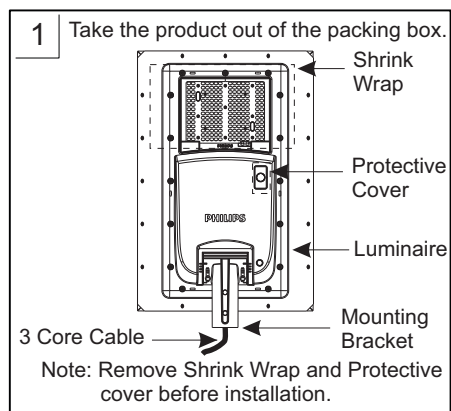

Precaution:

1. This luminaire will not operate below 0 degree ambient.
2. Maximum installation height is 5m.
3. Before installation check the luminaire by pressing the switch and make sure that it is glowing.
4. After three months of manufacturing it is necessary to check the glowing of the luminaire, if it is not working then contact to customer care.
5. After installation and during commissioning of luminaire, first press the switch to switch it ON and then connect AC 230Vrms input to the luminaire.
6. If two red and orange colour LED's start blinking then first remove AC input connections and press the switch to switch off the luminaire and wait for min two minutes. Subsequently follow same commissioning sequence as per point no. 5
7. The Light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

* Note - Representation product images and actual product may vary based on versions