

Installation Instructions

PHILIPS

Only for any servicing work
Diffuser frame can be opened (but not recommended)



FULL GLOW Rc380 G5
Recessed

IEC
60598

IP20




 **THIS LUMINAIRE MUST BE EARTHED**

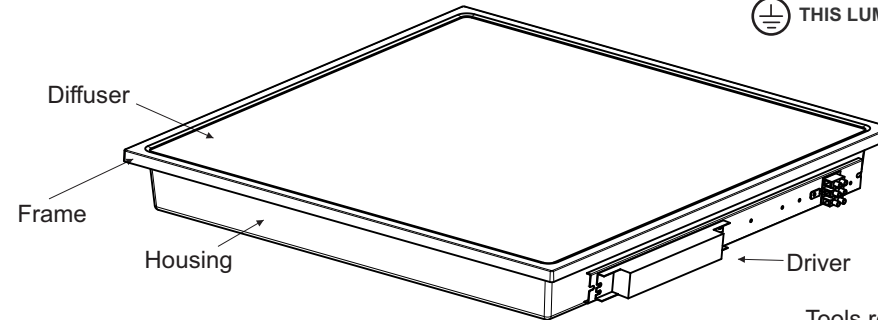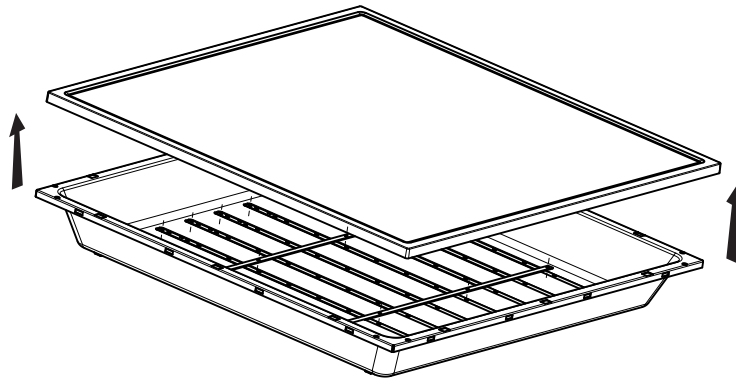


Tools required for installation :
1-Screw Driver

Open Snap Locks from Diffuser Frame
to open the Fitting for access.

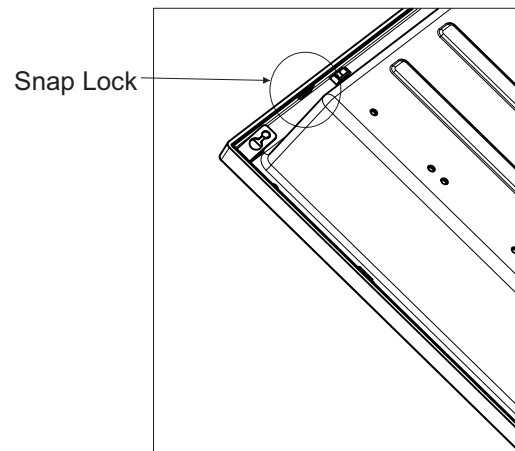

Pull Snap Locks from all positions to Open Frame

Product Dimensions

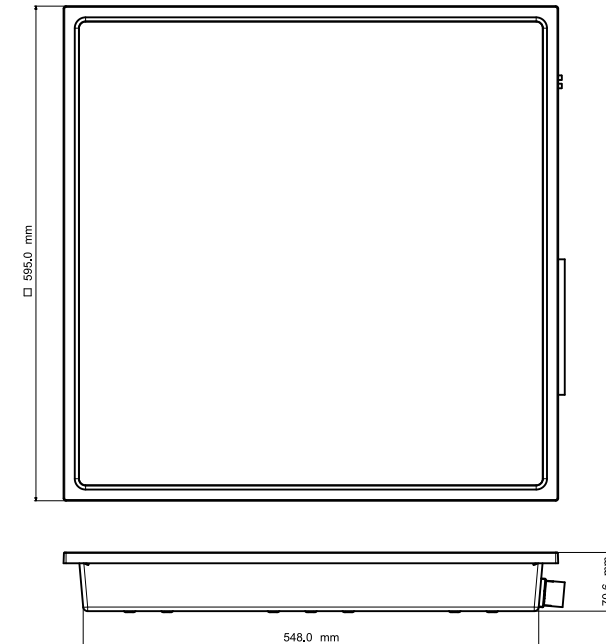


4415 109 24390




ATTENTION: Install in accordance with national and local building and electrical codes.

1

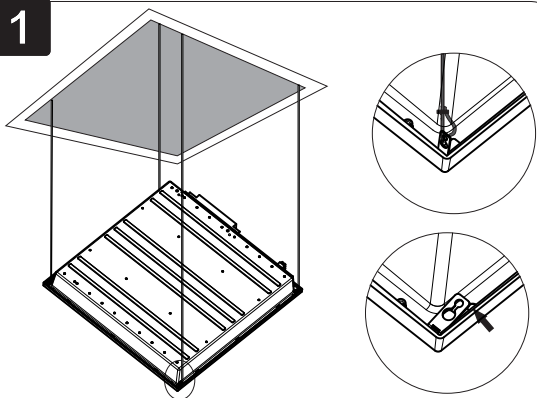


Open hanging hook,
then engage safety chain.


2

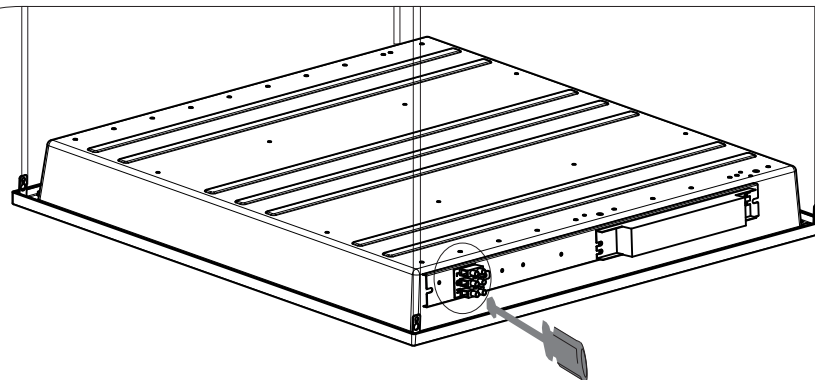

Wire Stripping



3

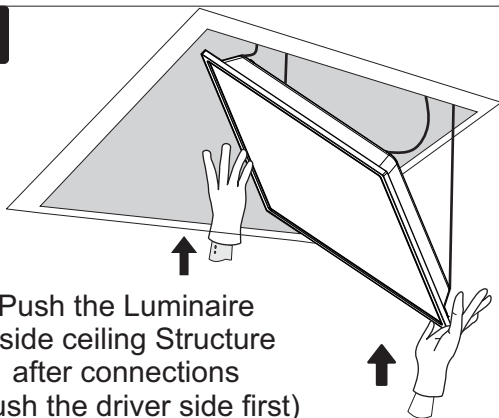

Push the Luminaire
inside ceiling Structure
after connections
(Push the driver side first)

LED DRIVER




Insert 3 wires L, N, & E in 3 Pin Terminal connector.

NOTE: DO NOT OPEN ANY SCREWS

Mains


4

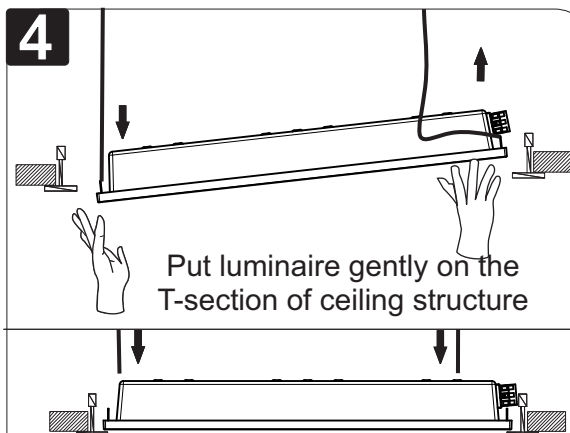


Put luminaire gently on the
T-section of ceiling structure

5


Luminaire is ready for operation.

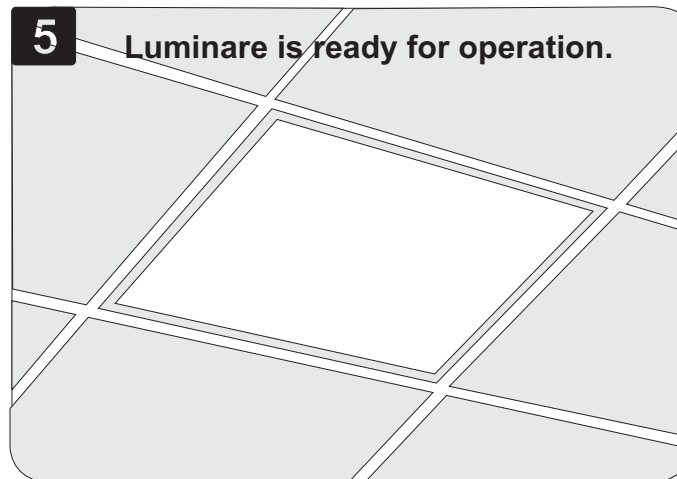

!



The Luminaire shall, under no circumstances,
be covered with any insulating material.
It will harm the system

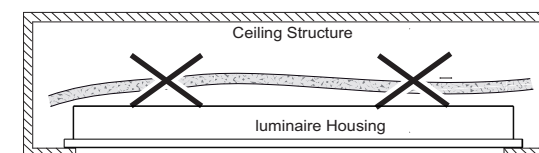

PHILIPS