

SceneSwitch LED spot

7178651



Switch light settings without switching spots

Some situations call for cool light, others benefit from the ambiance of a warm cozy glow. With Philips SceneSwitch LEDspot, you can have different light settings from just one spot. And you don't need a dimmer! Optimize your lighting for relaxing, hobbies, recreation or working. Simply at the flick of a switch. And that's your existing switch! No extra installation is required.

Benefits

- Create your own scene with one lamp simply using your existing light switch
- No dimmer or additional installation needed
- Auto memory: recall your last setting automatically

Applications

- Indoor applications in open luminaires (with an open/free air gap of min. 10 mm)
- Accent and general lighting (e.g. hotels, shops and offices)

Features


- Multiple light settings in one lamp
- Plug and play
- Built-in memory chip

Versions



CorePro LEDspot MV 25W
 GU10 830 36D

Dimensional drawing

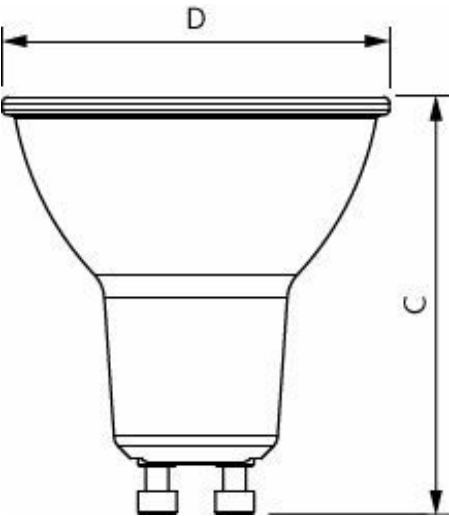

Product	D	C
LED SSW 50W GU10 WW 36D RF ND SRT4	50 mm	54 mm

General Information

Cap-Base	GU10
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Rated Lifetime (Hours)	15,000 hour(s)

Light Technical

Color Code	827/825/822 [CCT of 2700K/2500K/2200K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	355 lm
Luminous Intensity (Nom)	600 cd
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical

Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	4.8 W
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s

Temperature

T-Case Maximum (Nom)	75 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	PAR16

Approval and Application

Energy Consumption kWh/1000 h	5 kWh
-------------------------------	-------

Light Technical

Order Code	Full Product Name	Correlated Color Temperature (Nom)
30778000	LED SceneSwitch 50W GU10 WW 36D RF ND SRT4	2700 K 2500 K 2200 K