



# EB-T electronic ballasts for TL-D lamps

## EB-T Electronic ballasts for TL-D lamps (India)

Compact, lightweight, high-frequency electronic standard ballasts for TL-D 36 W/ TL40 lamps

### Benefits

- The combination of EB-T ballast and TL-D/TL5 lamps offers a standard professional lighting system that fulfills all international norms
- 25% energy saving compared with standard electromagnetic ballast system
- Protection against excessive mains voltage and incorrect terminal communications (e.g. output short)

### Features

- Flicker-free pre-heat (rapid-start) lamp ignition enables the lamps to be switched on and off without reducing useful life
- Offers low mains-current harmonic distortion of <10%
- End-of-life protection
- High power factor of 0.98
- Switching cycle 6500 times

### Application

- Areas with long hours of usage, e.g. industrial premises, airports and railway stations
- Retail and hospitality
- Office buildings and hospitals

# EB-T Electronic ballasts for TL-D lamps (India)

## Versions




GPPR\_INEFLU01\_0009-Product photo

GPPR\_INEFLU01\_0010-Product photo

GPPR INEFLU01 0011

## Dimensional drawing

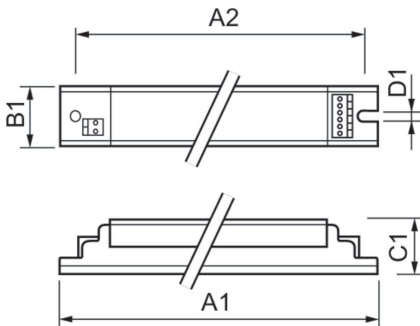

Product	D1	C1	A1	A2	B1
EBT 136 TLD	4.0 mm	30.0 mm	210.0 mm	200.0 mm	40.0 mm
EBT 218 TLD	4.0 mm	30.0 mm	210.0 mm	200.0 mm	40.0 mm
EBT 236 TLD	4.0 mm	30.0 mm	210.0 mm	200.0 mm	40.0 mm

