

PHILIPS

Lighting



Product Description

PAR38

Pressed-glass 121 mm diameter reflector lamps of high luminous intensity

Benefits

- Produces the same useful light as conventional PAR lamps at 20% lower energy
- Produces the same useful light as conventional PAR lamps at 20% lower energy

Features


- Spot versions have a stippled front reflector producing a narrow, homogeneous beam
- Spot versions have a stippled front reflector producing a narrow, homogeneous beam
- Flood versions have a front refractor composed of prismatic elements
- Flood versions have a front refractor composed of prismatic elements

PAR38

Application

- Can be used indoors and outdoors, or wherever blown-bulb reflector lamps would be too vulnerable
- Can be used indoors and outdoors, or wherever blown-bulb reflector lamps would be too vulnerable
- Indoors: shops, window displays, homes, hotels, restaurants, theatres, museums, exhibitions and buildings
- Indoors: shops, window displays, homes, hotels, restaurants, theatres, museums, exhibitions and buildings
- Outdoors: floodlighting, advertising signs, buildings, statues, podiums, sports grounds, parks and gardens
- Outdoors: floodlighting, advertising signs, buildings, statues, podiums, sports grounds, parks and gardens
- Can be installed outdoors without any protection, provided they are used in a watertight lampholder
- Can be installed outdoors without any protection, provided they are used in a watertight lampholder
- For outdoor use, a heat-resistant rubber ring must be fitted between the lamp and the lampholder
- For outdoor use, a heat-resistant rubber ring must be fitted between the lamp and the lampholder

Dimensional drawing

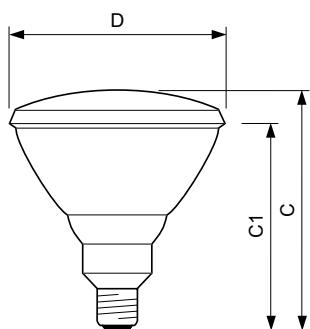

Product	D	C (max)	C1
PAR38 120W E27/51 220-240V PAR38 12D 1CT	121 mm	137 mm	123 mm
PAR38 120W E27/51 220-240V PAR38 30D 1CT	121 mm	137 mm	123 mm
PAR38 80W E27 230V PAR38 FL 30D 1CT/12	123 mm	137 mm	

General Information	
Rated Lifetime (Hours)	2,000 hour(s)
Nominal lifetime	2,000 hour(s)
Operating Position	UNIVERSAL
Light Technical	
Color rendering index (CRI)	100
Operating and Electrical	
Starting Time (Nom)	0.0 s
Mechanical and Housing	
Bulb Shape	PAR38

General Information

PAR38

Order Code	Full Product Name	Cap-Base	Switching Cycle
923810544296	PAR38 80W E27 230V PAR38 FL 30D	E27	8,000
	1CT/12		
923815343301	PAR38 120W E27/51 220-240V PAR38 12D	E27/51	-
	1CT		

Light Technical

Order Code	Full Product Name	Correlated Color		
		Beam Angle	Temperature	Luminous Flux
923810544296	PAR38 80W E27 230V	30 degree(s)	2700 K	-
	PAR38 FL 30D 1CT/12			
923815343301	PAR38 120W E27/51	12 degree(s)	-	1,150 lm
	220-240V PAR38 12D			
	1CT			

Operating and Electrical


Order Code	Full Product Name	Warm-up		
		time to 60% light	Voltage (Nom)	Power Consumption
923810544296	PAR38 80W E27 230V	instant full	230 V	80.0 W
	PAR38 FL 30D 1CT/12	light s		
923815343301	PAR38 120W E27/51	-	220-240 V	120 W
	220-240V PAR38 12D			
	1CT			

Controls and Dimming

Order Code	Full Product Name	Dimmable
923810544296	PAR38 80W E27 230V PAR38 FL 30D 1CT/12	Yes
923815343301	PAR38 120W E27/51 220-240V PAR38 12D 1CT	-

Approval and Application


Order Code	Full Product Name	Energy Consumption	
		kWh/1000 h	
923810544296	PAR38 80W E27 230V PAR38 FL 30D 1CT/12	80 kWh	
923815343301	PAR38 120W E27/51 220-240V PAR38 12D	-	
	1CT		
923815643301	PAR38 120W E27/51 220-240V PAR38 30D	-	
	1CT		

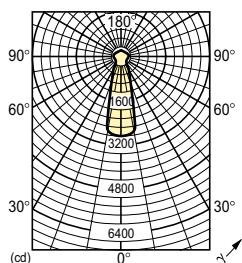

Order Code	Full Product Name	Cap-Base	Switching Cycle
923815643301	PAR38 120W E27/51 220-240V PAR38 30D	E27/51	-
	1CT		


Order Code	Full Product Name	Correlated Color		
		Beam Angle	Temperature	Luminous Flux
923815643301	PAR38 120W E27/51	30 degree(s)	-	1,150 lm
	220-240V PAR38 30D			
	1CT			

Order Code	Full Product Name	Warm-up		
		time to 60% light	Voltage (Nom)	Power Consumption
923815643301	PAR38 120W E27/51	-	220-240 V	120 W
	220-240V PAR38 30D			
	1CT			

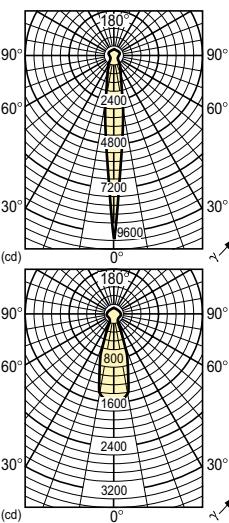


PAR38


Accent Diagrams

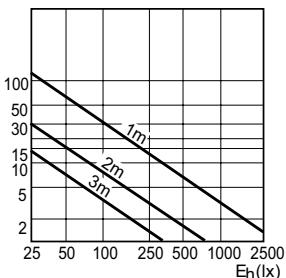

Accent Diagram - PAR38 120W E27/51
220-240V PAR38 30D 1CT

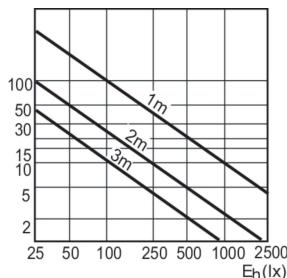


Accent Diagram - PAR38 120W E27/51
220-240V PAR38 12D 1CT

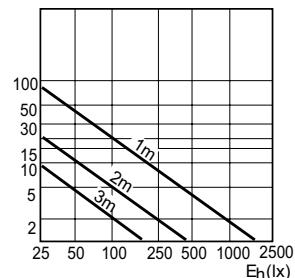


Accent Diagram - PAR38 80W E27 230V PAR38
FL 30D 1CT/12


Beam Diagrams

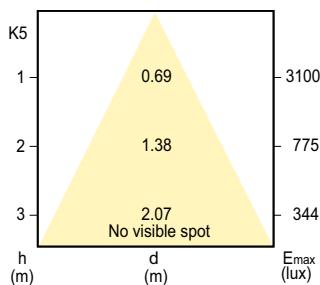

Beam diagram - PAR38 120W E27/51 220-240V
PAR38 30D 1CT

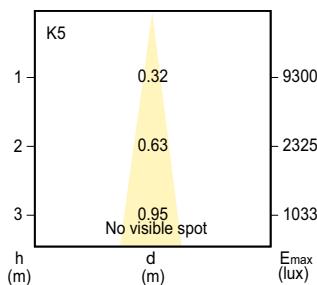

Beam diagram - PAR38 120W E27/51 220-240V
PAR38 12D 1CT

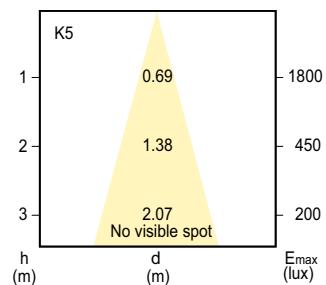

Beam diagram - PAR38 80W E27 230V PAR38
FL 30D 1CT/12

