



# Install smarter, finish sooner Choose long-lasting reliability and performance

## CoreLine Panel gen6

Philips CoreLine panel Gen6 delivers on the CoreLine promise of innovation, easy installation, and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative All-in feature offers a choice of three lumen packages and three-color temperatures in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing the CoreLine RC132V LED panel is quick and easy, using the product's quick connector or flywire. The CoreLine range includes Interact Ready luminaires with integrated wireless communications, ready to be used with Interact gateways, sensors, and software.

### Benefits

- Low-risk, reliable products
- Work faster with these easy-to-install products
- No confusion with easy product selection
- Stay relevant by joining IoT / connected lighting systems

# CoreLine Panel gen6



## Features

- L90@50K hrs/ L80@100K hrs with 5-year warranty
- Quick connector (green/white, Flywire, WAGO, and Schuko)
- High lumen office-compliant and non-office compliant versions
- CRI 80/CRI 90 at SDCM <3
- CRI 80 4000 K 140 lm/Wand 3000 K > 130 lm/W, CRI 90 >115 lm/W
- UltraEfficient 4000 K >160 lm/W
- All-in: multiple lumen packages and color temperatures in one luminaire



## Application

- Offices
- Healthcare
- Municipal buildings
- Education

## Versions

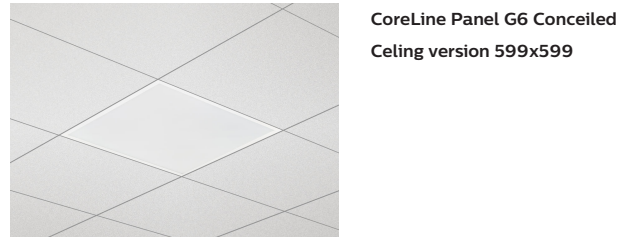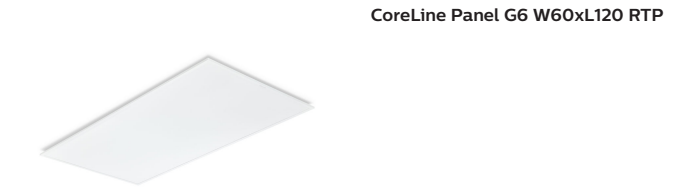


## Dimensional drawing

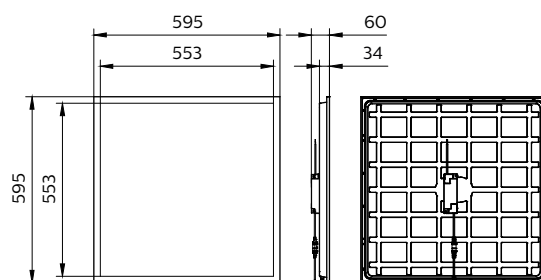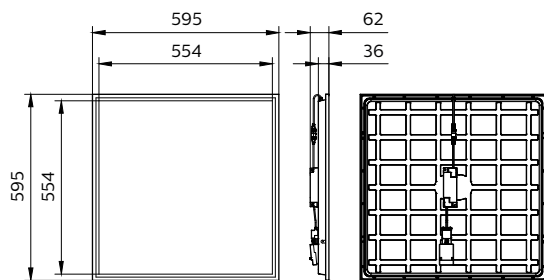










# CoreLine Panel gen6

## Dimensional drawing

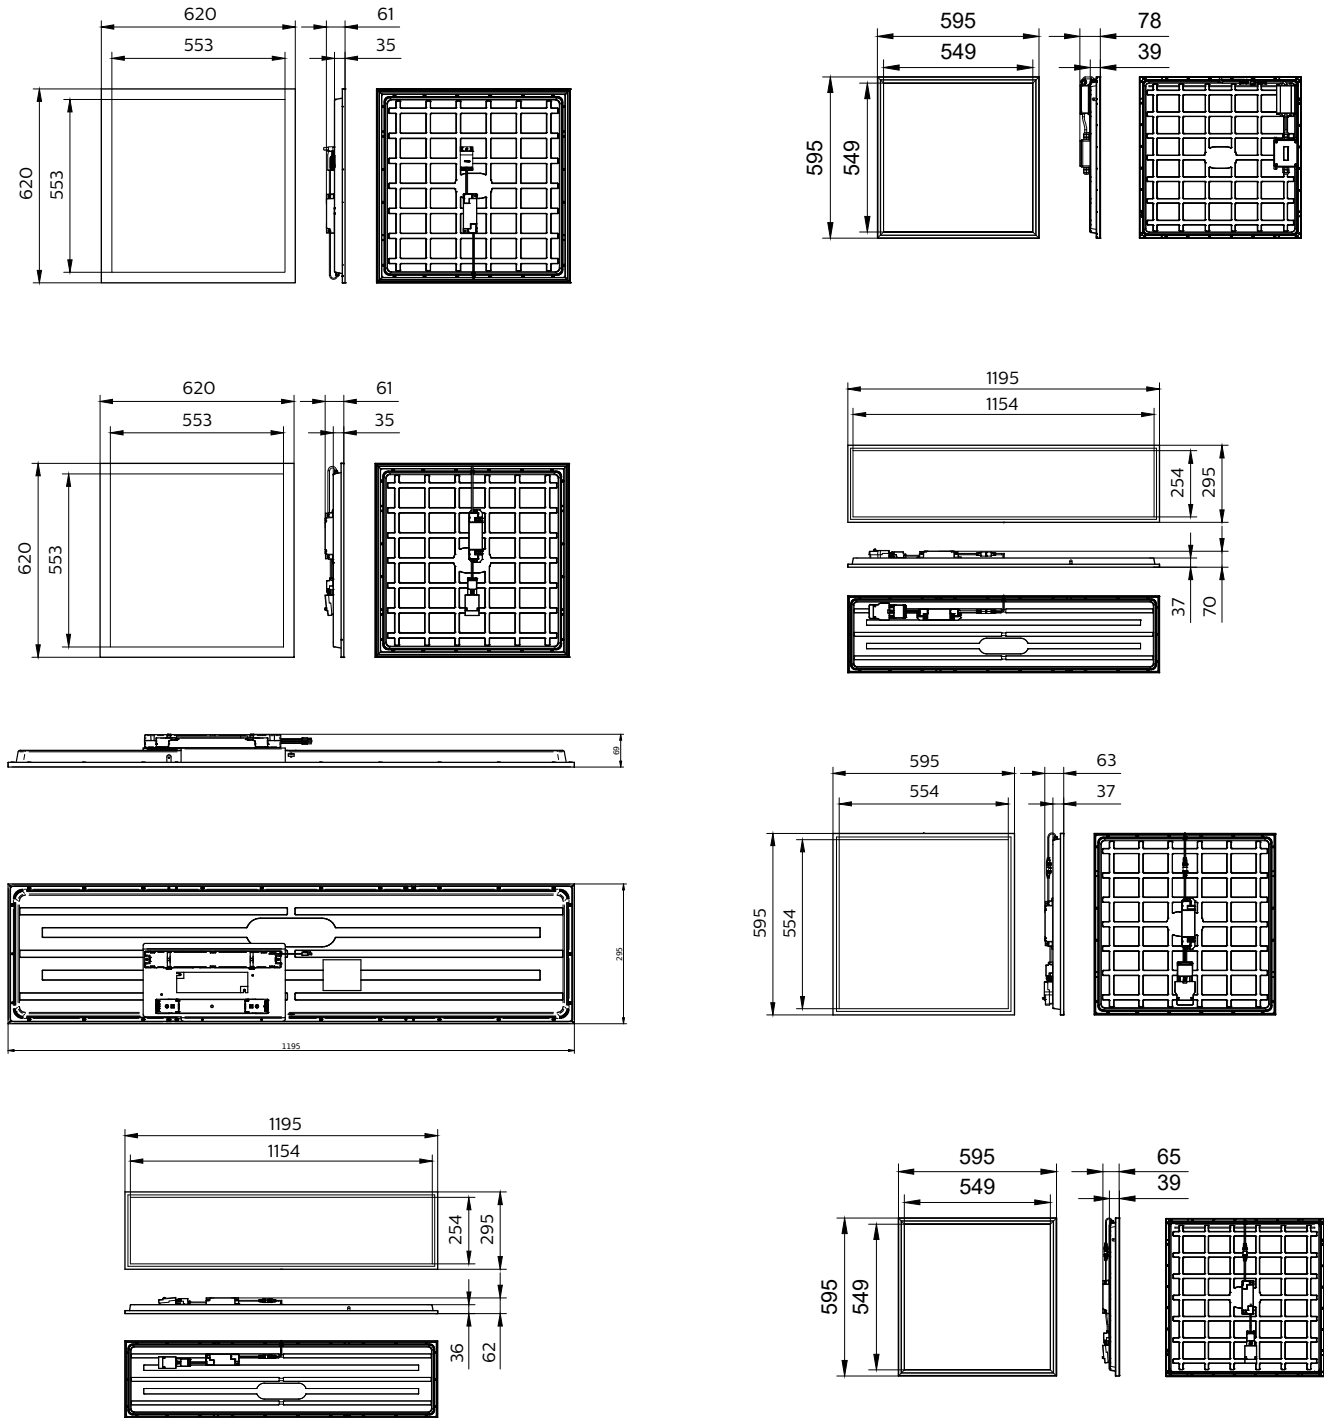









# CoreLine Panel gen6

## Dimensional drawing

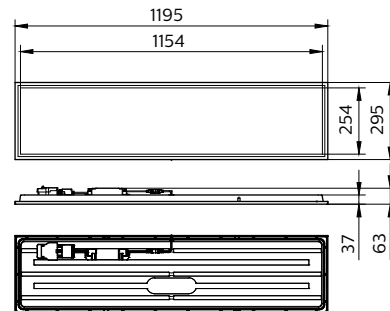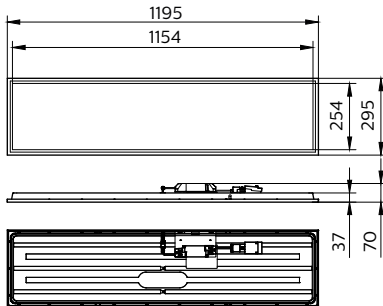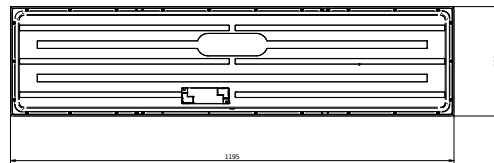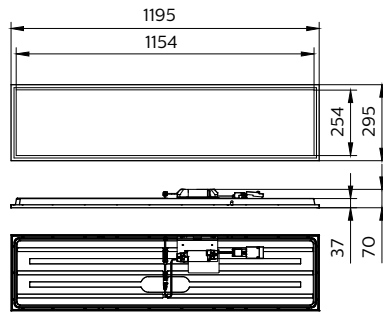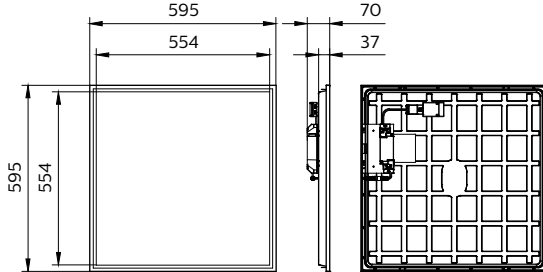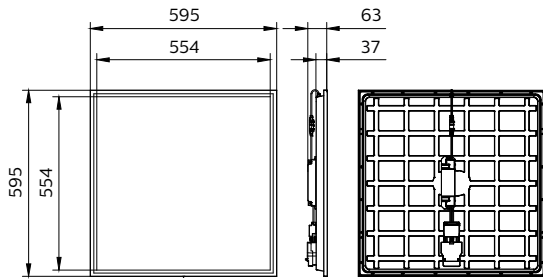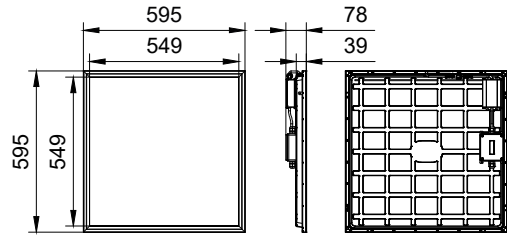












# CoreLine Panel gen6

## Dimensional drawing

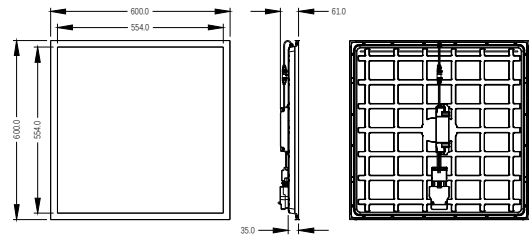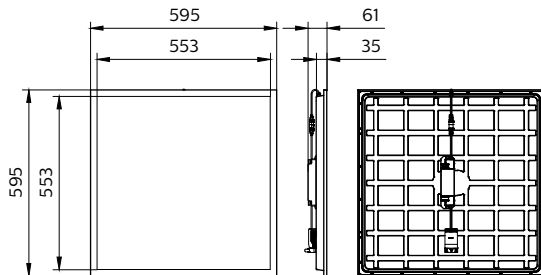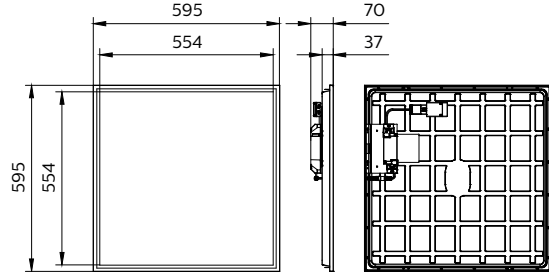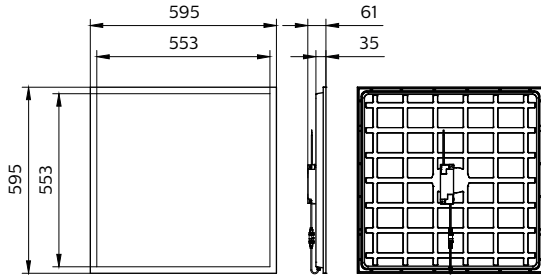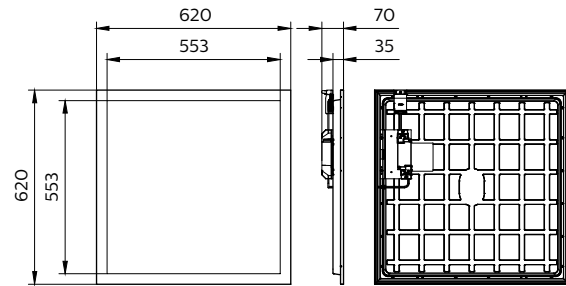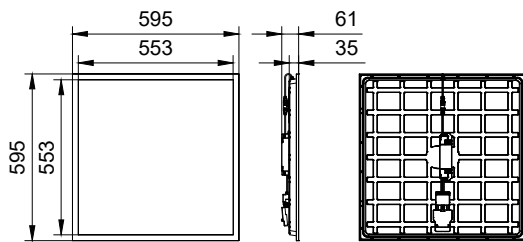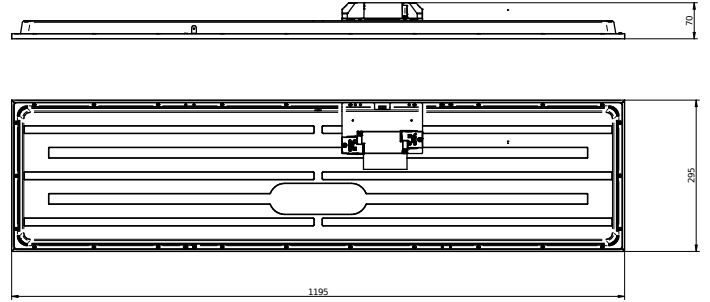









# CoreLine Panel gen6

## Dimensional drawing

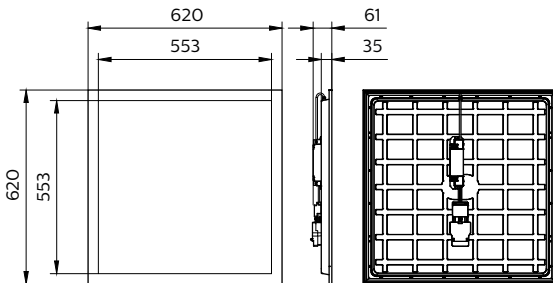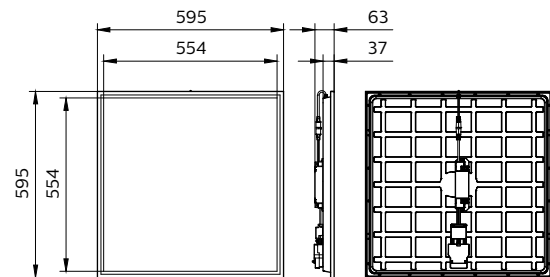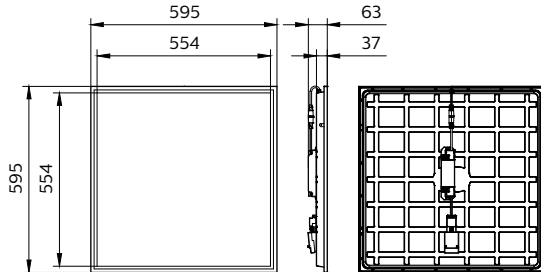

# CoreLine Panel gen6

## Dimensional drawing

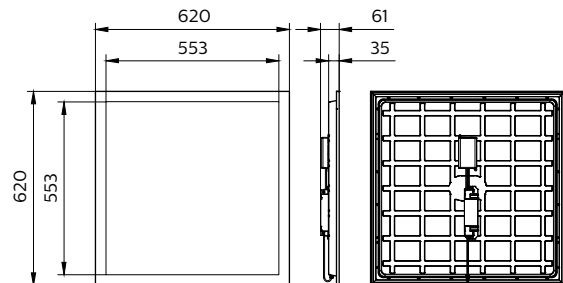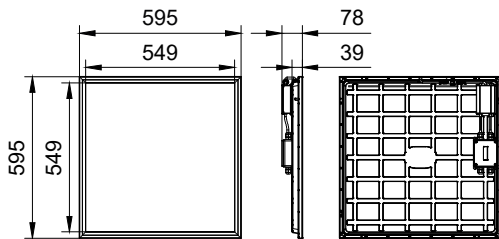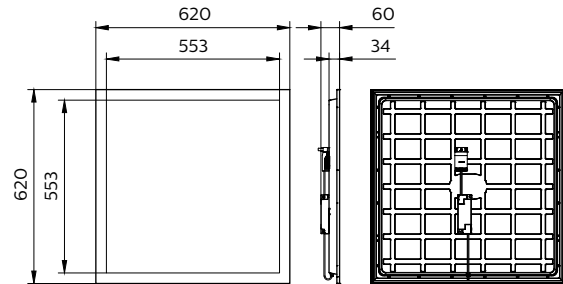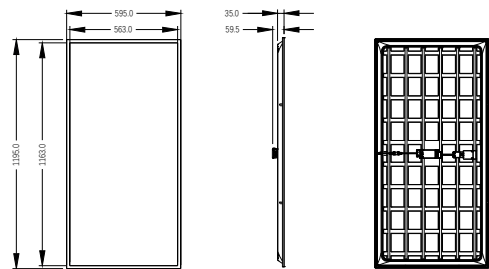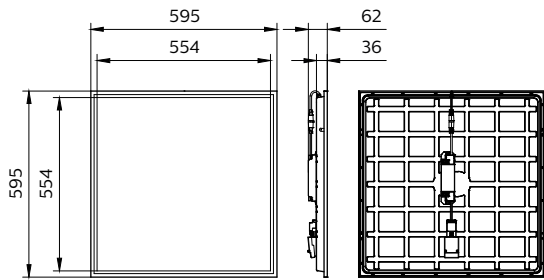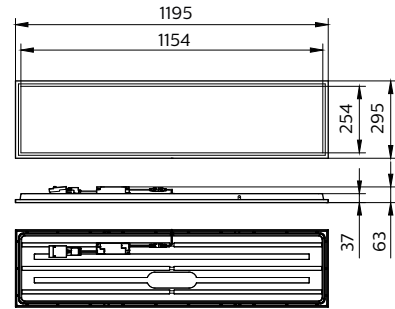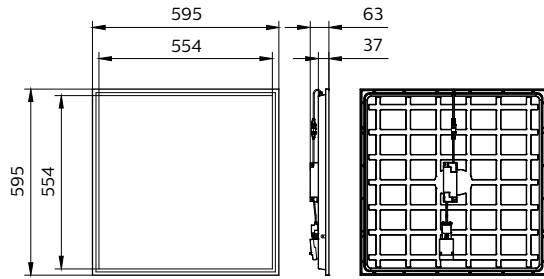

# CoreLine Panel gen6

## Product details



CoreLine panel G6 PSU Green  
connector fits Wieland W3  
connector



CoreLine connector Wago WA3




CoreLine panel G6 PSU W60L60  
back side DPP



CoreLine panel G6 IP65 PSU driver



CoreLine panel G6 PSU W30L120  
SIA Sensor back side DPP



CoreLine panel G6 PSU driver DPP



CoreLine panel G6 WIA back side  
DPP



CoreLine panel G6 W62L62 OC  
Optical window DPP

# CoreLine Panel gen6

## Product details

CoreLine panel G6 WIA W62L62  
back side DPP




CoreLine panel G6 PSU W30L120  
back side DPP



CoreLine panel G6 PSD W30L120  
back side DPP



CoreLine panel G6 PSD driver  
open DPP



CoreLine Panel G6 Concealed  
Ceiling version 599x599 detail  
frontside

CoreLine panel G6 PSD All in  
W60L60 back side DPP



CoreLine Panel RC132V IK03 ELR  
Optic



CoreLine panel G6 IP65 PSD driver



CoreLine panel G6 side angle DPP



# CoreLine Panel gen6

## Product details

CoreLine panel G6 back side IP65  
IP20



CoreLine connector wago WA5



CoreLine panel G6 WIA driver DPP



CoreLine panel G6 NOC Optical  
window DPP




CoreLine panel G6 All in driver  
open DPP



CoreLine panel G6 All in driver  
DPP



CoreLine panel G6 PSU driver  
open DPP



CoreLine panel G6 PSD W60L60  
back side DPP



CoreLine connector Schuko CCE



CoreLine Panel G6 Concealed  
Celing version 599x599 backside  
closed brackets



# CoreLine Panel gen6

## Product details



CoreLine Panel G6 Concealed  
Ceiling version 599x599 detail  
backside



CoreLine Panel G6 Concealed  
Ceiling version 599x599 backside  
open brackets



CoreLine panel G6 IP65 PSD back  
side



CoreLine Panel RC132V IK03 ELR  
Backplate




CoreLine panel G6 W60L60 OC  
Optical window DPP



CoreLine panel G6 IP65 PSU back  
side



CoreLine panel G6 PSU W62L62  
back side DPP



CoreLine panel G6 PSD driver DPP

# CoreLine Panel gen6

## General Information

Driver included	Yes
Number of gear units	1 unit
Service tag	Yes

## Operating and Electrical

Protection class IEC	Safety class II
----------------------	-----------------

## Mechanical and Housing

Explosion hazard class	-
------------------------	---

## Approval and Application

CE mark	Yes
ENEC mark	ENEC mark
Stroboscopic effect visibility measure (SVM)	0.4

## Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%
-------------------------	-------------

## Light Technical (1/2)

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	-	90 degree(s)	4000 K	>80
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	-	90 degree(s)	3000 K	>80
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	All-in, Multi Color Temperature	90 degree(s)	4000 K	>80
911401802887	RC132V G6 36S/840 WIA W30L120 OC	-	90 degree(s)	4000 K	>80
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-	120 degree(s)	4000 K	>80
911401890785	RC132V G6 36S/840 PSU W30L120 OC	-	90 degree(s)	4000 K	>80
911401891085	RC132V G6 36S/840 PSD W30L120 OC	-	90 degree(s)	4000 K	>80
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	120 degree(s)	4000 K	>90
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-	90 degree(s)	4000 K	>90
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-	90 degree(s)	4000 K	>90
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	120 degree(s)	4000 K	>80
911401888287	RC132V 60S/840 PSU W60L120 OC	-	-	4000 K	>80
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
911401800087	RC132V G6 36S/UEB40 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80

## CoreLine Panel gen6

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
911401800387	RC132V G6 50S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-	90 degree(s)	4000 K	>80
911401802187	RC132V G6 34S/830 WIA W60L60 OC	-	90 degree(s)	3000 K	>80
911401802287	RC132V G6 36S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
911401802487	RC132V G6 43S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	-	120 degree(s)	4000 K	>80
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-	120 degree(s)	3000 K	>80
911401807687	RC132V G6 34S/830 PSU W60L60 OC	-	90 degree(s)	3000 K	>80
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	All-in, Multi Lumen	-	4000 K	>80
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80
911401890585	RC132V G6 36S/840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
910505102804	RC133V G6 36S/840 PSED W62L62 OC	-	90 degree(s)	4000 K	>80
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-	90 degree(s)	4000 K	>80
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-	120 degree(s)	4000 K	>80
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-	90 degree(s)	4000 K	>80
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-	90 degree(s)	4000 K	>80
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	4000 K	>90

## CoreLine Panel gen6

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OOCUKI	All-in, Multi Lumen	90 degree(s)	4000 K	>80
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	-	90 degree(s)	4000 K	>80
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	-	90 degree(s)	3000 K	>80
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	All-in, Multi Lumen	120 degree(s)	3000 K	>80
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	-	-	4000 K	>80

### Light Technical (2/2)

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	135 lm/W	4,300 lm	Beam angle 90°	910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	136 lm/W	2,900 lm	Beam angle 90°
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	126 lm/W	4,000 lm	Beam angle 90°	910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	136 lm/W	2,900 lm	Beam angle 90°

## CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	135 lm/W	4,300 lm	Beam angle 90°
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	135 lm/W	4,300 lm	Beam angle 90°
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	140 lm/W	2,900 lm	Beam angle 90°
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	140 lm/W	4,000 lm	Beam angle 90°
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
911401802887	RC132V G6 36S/840 WIA W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	140 lm/W	3,600 lm	Beam angle 120°
911401890785	RC132V G6 36S/840 PSU W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
911401891085	RC132V G6 36S/840 PSD W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	110 lm/W	5,000 lm	Beam angle 120°
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	105 lm/W	4,800 lm	Beam angle 90°
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	105 lm/W	4,800 lm	Beam angle 90°
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	140 lm/W	3,600 lm	Beam angle 120°
911401888287	RC132V 60S/840 PSU W60L120 OC	140 lm/W	6,000 lm	Beam angle 90°
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	160 lm/W	3,600 lm	Beam angle 120°
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	160 lm/W	3,600 lm	Beam angle 90°
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
911401800387	RC132V G6 50S/840 PSD W60L60 OC	130 lm/W	5,000 lm	Beam angle 90°
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	140 lm/W	3,600 lm	Beam angle 90°
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	140 lm/W	3,600 lm	Beam angle 90°
911401802187	RC132V G6 34S/830 WIA W60L60 OC	130 lm/W	3,400 lm	Beam angle 90°
911401802287	RC132V G6 36S/840 WIA W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°
911401802487	RC132V G6 43S/840 WIA W60L60 OC	140 lm/W	4,300 lm	Beam angle 90°
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	140 lm/W	4,300 lm	Beam angle 90°
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	140 lm/W	4,300 lm	Beam angle 120°
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	130 lm/W	5,000 lm	Beam angle 90°
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	130 lm/W	3,400 lm	Beam angle 120°
911401807687	RC132V G6 34S/830 PSU W60L60 OC	130 lm/W	3,400 lm	Beam angle 90°

## CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)			Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)			Optic type
		Luminous Flux	Luminous Flux	Luminous Flux				Luminous Flux	Luminous Flux	Luminous Flux	
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	140 lm/W	3,100 lm		Beam angle 90°	911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	140 lm/W	2,900 lm		Beam angle 90°
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	140 lm/W	3,600 lm		Beam angle 120°	911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	140 lm/W	2,900 lm		Beam angle 90°
911401890585	RC132V G6 36S/840 PSU W60L60 OC	140 lm/W	3,600 lm		Beam angle 90°	910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	136 lm/W	2,900 lm		Beam angle 90°
911401890885	RC132V G6 36S/840 PSD W60L60 OC	140 lm/W	3,600 lm		Beam angle 90°	910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	136 lm/W	2,900 lm		Beam angle 90°
910505102804	RC133V G6 36S/840 PSED W62L62 OC	134 lm/W	3,600 lm		Beam angle 90°	910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	135 lm/W	4,300 lm		Beam angle 90°
911401802687	RC133V G6 36S/840 WIA W62L62 OC	140 lm/W	3,600 lm		Beam angle 90°	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	135 lm/W	4,300 lm		Beam angle 90°
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	140 lm/W	3,600 lm		Beam angle 120°	910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	135 lm/W	4,300 lm		Beam angle 90°
911401890685	RC133V G6 36S/840 PSU W62L62 OC	140 lm/W	3,600 lm		Beam angle 90°	911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	140 lm/W	2,900 lm		Beam angle 120°
911401890985	RC133V G6 36S/840 PSD W62L62 OC	140 lm/W	3,600 lm		Beam angle 90°	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	140 lm/W	4,000 lm		Beam angle 90°
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	115 lm/W	3,100 lm		Beam angle 90°	911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	140 lm/W	2,900 lm		Beam angle 90°
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	140 lm/W	3,100 lm		Beam angle 90°	911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	140 lm/W	2,900 lm		Beam angle 90°
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	135 lm/W	4,300 lm		Beam angle 90°	911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	153 lm/W	3,600 lm		Beam angle 90°
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	126 lm/W	4,000 lm		Beam angle 90°						

### Operating and Electrical

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching		Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching	
					for random switching	for random switching						for random switching	for random switching
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	220-240 V	50 to 60 Hz	32 W	No		910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	220-240 V	50 to 60 Hz	32 W	No	

# CoreLine Panel gen6

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching			Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching		
					No	Yes	Not applicable						No	Yes	Not applicable
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	220-240 V	50 to 60 Hz	32 W	No	Yes	Not applicable	911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	220 to 240 V	50 or 60 Hz	26 W	No	Yes	Not applicable
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	220-240 V	50 to 60 Hz	32 W	No	Yes	Not applicable	911401802187	RC132V G6 34S/830 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	No	Yes	Not applicable
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	220-240 V	50 to 60 Hz	32 W	No	Yes	Not applicable	911401802287	RC132V G6 36S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	No	Yes	Not applicable
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	220-240 V	50 to 60 Hz	32 W	No	Yes	Not applicable	911401802487	RC132V G6 43S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	No	Yes	Not applicable
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable	911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable	911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	220-240 V	50 to 60 Hz	27 W	No	Yes	Not applicable	911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	38 W	No	Yes	Not applicable
911401802887	RC132V G6 36S/840 WIA W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable	911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable	Yes	Not applicable
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable	911401807587	RC132V G6 34S/830 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
911401890785	RC132V G6 36S/840 PSU W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable	911401807687	RC132V G6 34S/830 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
911401891085	RC132V G6 36S/840 PSD W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable	911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable	Yes	Not applicable	911401890285	RC132V G6 36S/840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable	Yes	Not applicable	911401890585	RC132V G6 36S/840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable	Yes	Not applicable	911401890885	RC132V G6 36S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable	910505102804	RC133V G6 36S/840 PSED W62L62 OC	220-240 V	50 to 60 Hz	27 W	No	Yes	Not applicable
911401888287	RC132V 60S/840 PSU W60L120 OC	220 to 240 V	50 or 60 Hz	43 W	Not applicable	Yes	Not applicable	911401802687	RC133V G6 36S/840 WIA W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No	Yes	Not applicable	911401890385	RC133V G6 36S/840 PSU W62L62 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No	Yes	Not applicable	911401890685	RC133V G6 36S/840 PSU W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No	Yes	Not applicable	911401890985	RC133V G6 36S/840 PSD W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable	Yes	Not applicable	911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable	Yes	Not applicable
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable	Yes	Not applicable	911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable	Yes	Not applicable	910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	220-240 V	50 to 60 Hz	32 W	No	Yes	Not applicable
911401800387	RC132V G6 50S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable	Yes	Not applicable	910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	220-240 V	50 to 60 Hz	32 W	No	Yes	Not applicable
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	26 W	Not applicable	Yes	Not applicable	911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	Yes	Not applicable

# CoreLine Panel gen6

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching			Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching		
					Not applicable	No	No						Not applicable	No	No
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable			911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	220 to 240 V	50 or 60 Hz	31 W	Not applicable		
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	220-240 V	50 to 60 Hz	32 W	No			911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable		
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	220-240 V	50 to 60 Hz	32 W	No			911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable		
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	220-240 V	50 to 60 Hz	32 W	No			911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable		
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	220-240 V	50 to 60 Hz	32 W	No			911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable		
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	220-240 V	50 to 60 Hz	32 W	No										

## Controls and Dimming

Order Code	Full Product Name	Dimmable	Embedded control		Maximum dim level	Order Code	Full Product Name	Dimmable	Embedded control		Maximum dim level
			Interact	sensor					Interact	sensor	
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	Yes	Interact	SC200 sensor	10%	911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	Yes	-	1%	
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	Yes	Interact	SC200 sensor	10%	911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	Not applicable	
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	No	-	-	Not applicable	911401888287	RC132V 60S/840 PSU W60L120 OC	No	-	Not applicable	
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	-	Not applicable	910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	-	Not applicable	
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	Yes	-	-	10%	910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	Yes	-	10%	
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	Yes	-	-	10%	910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	Yes	-	10%	
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	Yes	-	-	1%	911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	No	-	Not applicable	
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	Yes	-	-	1%	911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	Not applicable	
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	-	-	Not applicable	911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	Yes	-	1%	
911401802887	RC132V G6 36S/840 WIA W30L120 OC	Yes	-	-	1%	911401800387	RC132V G6 50S/840 PSD W60L60 OC	Yes	-	1%	
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	No	-	-	Not applicable	911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	Not applicable	
911401890785	RC132V G6 36S/840 PSU W30L120 OC	No	-	-	Not applicable	911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	Not applicable	
911401891085	RC132V G6 36S/840 PSD W30L120 OC	Yes	-	-	1%	911401802187	RC132V G6 34S/830 WIA W60L60 OC	Yes	-	1%	
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	-	Not applicable	911401802287	RC132V G6 36S/840 WIA W60L60 OC	Yes	-	1%	
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	-	Not applicable	911401802487	RC132V G6 43S/840 WIA W60L60 OC	Yes	-	1%	
						911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	Not applicable	

## CoreLine Panel gen6

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	No	-	Not applicable
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	Not applicable
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	Yes	-	1%
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	No	-	Not applicable
911401807687	RC132V G6 34S/830 PSU W60L60 OC	No	-	Not applicable
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	No	-	-
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	No	-	Not applicable
911401890585	RC132V G6 36S/840 PSU W60L60 OC	No	-	Not applicable
911401890885	RC132V G6 36S/840 PSD W60L60 OC	Yes	-	1%
910505102804	RC133V G6 36S/840 PSED W62L62 OC	Yes	-	10%
911401802687	RC133V G6 36S/840 WIA W62L62 OC	Yes	-	1%
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	No	-	Not applicable
911401890685	RC133V G6 36S/840 PSU W62L62 OC	No	-	Not applicable
911401890985	RC133V G6 36S/840 PSD W62L62 OC	Yes	-	1%
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	Yes	-	1%
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	No	-	Not applicable

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	Yes	Interact SC200 sensor	10%
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	Yes	Interact SC200 sensor	10%
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	No	-	Not applicable
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	Yes	-	1%
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	Not applicable
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	Not applicable
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	Yes	-	10%
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	Yes	-	10%
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	Yes	-	10%
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	No	-	Not applicable
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	Yes	-	1%
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	No	-	Not applicable
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	Yes	-	1%
911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	Yes	-	1%

### Mechanical and Housing

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	White	IK02	IP20
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	White	IK02	IP20
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	White	IK02	IP20/44
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	White	IK02	IP20/44
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	White	IK02	IP20/44
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	White	IK02	IP20/44

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	White	IK02	IP20/44
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	White	IK02	IP20/44
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	White	IK03	IP20/44
911401802887	RC132V G6 36S/840 WIA W30L120 OC	White	IK02	IP20/44
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	White	IK03	IP20/44
911401890785	RC132V G6 36S/840 PSU W30L120 OC	White	IK02	IP20/44

## CoreLine Panel gen6

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
911401891085	RC132V G6 36S/840 PSD W30L120 OC	White	IK02	IP20/44
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	White	IK03	IP65
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	White	IK03	IP65
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	White	IK03	IP65
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	White	IK03	IP20/65
911401888287	RC132V 60S/840 PSU W60L120 OC	White	IK03	IP20(IP44 front)
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	White	IK03	IP20/44
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	White	IK03	IP20/44
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	White	IK03	IP20/44
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	White	IK03	IP20/44
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	White	IK02	IP20/44
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	White	IK02	IP20/44
911401800387	RC132V G6 50S/840 PSD W60L60 OC	White	IK02	IP20/44
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	White	IK02	IP20/40
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	White	IK02	IP20/40
911401802187	RC132V G6 34S/830 WIA W60L60 OC	White	IK02	IP20/44
911401802287	RC132V G6 36S/840 WIA W60L60 OC	White	IK02	IP20/44
911401802487	RC132V G6 43S/840 WIA W60L60 OC	White	IK02	IP20/44
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	White	IK02	IP20/40
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	White	IK03	IP20/40
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	White	IK02	IP20/40
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	White	IK02	IP20/44
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	White	IK03	IP20/44
911401807687	RC132V G6 34S/830 PSU W60L60 OC	White	IK02	IP20/44
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	White RAL 9003	IK03	IP20/40

Order Code	Full Product Name	Housing Color	Mech. impact protection code	Ingress protection code
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	White	IK03	IP20/44
911401890585	RC132V G6 36S/840 PSU W60L60 OC	White	IK02	IP20/44
911401890885	RC132V G6 36S/840 PSD W60L60 OC	White	IK02	IP20/44
910505102804	RC133V G6 36S/840 PSED W62L62 OC	White	IK03	IP20/40
911401802687	RC133V G6 36S/840 WIA W62L62 OC	White	IK02	IP20/40
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	White	IK03	IP20/40
911401890685	RC133V G6 36S/840 PSU W62L62 OC	White	IK02	IP20/40
911401890985	RC133V G6 36S/840 PSD W62L62 OC	White	IK02	IP20/40
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	White	IK02	IP20/44
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	White	IK02	IP20/40
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	White	IK02	IP20
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	White	IK02	IP20
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	White	IK02	IP20/40
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	White	IK02	IP20/40
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	White	IK02	IP20/44
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	White	IK02	IP20/44
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	White	IK02	IP20/44
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	White	IK02	IP20/44
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	White	IK02	IP20/44
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	White	IK03	IP20/44
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	White	IK02	IP20/44
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	White	IK02	IP20/44
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	White	IK02	IP20/44
911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	White	IK02	IP20(front IP40)

# CoreLine Panel gen6

## Emergency Operation (1/2)

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	No	-	-	-				compatible battery kit accessory		
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	No	-	-	-	910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	No	-	-	-						
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	-	-						
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	No	-	-	-	910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	No	-	-	-						
911401801187	RC132V G6 29_36_43S/ 830_40 PSDW30L120OC	No	-	-	-	910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	No	-	-	-						
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium	911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-
911401802887	RC132V G6 36S/840 WIA W30L120 OC	No	-	-	-						
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	-	-
						911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	No	-	-	-
						911401800387	RC132V G6 50S/840 PSD W60L60 OC	No	-	-	-
911401890785	RC132V G6 36S/840 PSU W30L120 OC	No	-	-	-	911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	-	-
911401891085	RC132V G6 36S/840 PSD W30L120 OC	No	-	-	-	911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	-	-
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	-	-	911401802187	RC132V G6 34S/830 WIA W60L60 OC	No	-	-	-
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	-	-	911401802287	RC132V G6 36S/840 WIA W60L60 OC	No	-	-	-
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	No	-	-	-	911401802487	RC132V G6 43S/840 WIA W60L60 OC	No	-	-	-
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	-	-	911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	-	-
911401888287	RC132V 60S/840 PSU W60L120 OC	No	Self-contained emergency lighting is possible when used with a	380 lm	-	911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	No	Self-contained emergency lighting is possible when	380 lm	-

# CoreLine Panel gen6

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Typ em light bat	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery
			used with a compatible battery kit accessory						possible when used with a compatible battery kit accessory		
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	-	-	911401890685	RC133V G6 36S/840 PSU W62L62 OC	No	-	-	-
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	No	-	-	-	911401890985	RC133V G6 36S/840 PSD W62L62 OC	No	-	-	-
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	No	-	-	-
						911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	No	-	-	-
						910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	No	-	-	-
						910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	No	-	-	-
911401807687	RC132V G6 34S/830 PSU W60L60 OC	No	-	-	-	911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	No	-	-	-
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	No	-	-	-
						910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	-	-
						910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	-	-
						910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	No	-	-	-
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	No	-	-	-
						910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	No	-	-	-
						911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-
911401890585	RC132V G6 36S/840 PSU W60L60 OC	No	-	-	-						
911401890885	RC132V G6 36S/840 PSD W60L60 OC	No	-	-	-						
910505102804	RC133V G6 36S/840 PSED W62L62 OC	Yes	DC operated central emergency lighting	540 lm	-	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	No	-	-	-
						911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	No	-	-	-
911401802687	RC133V G6 36S/840 WIA W62L62 OC	No	-	-	-	911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	No	-	-	-
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	No	Self-contained emergency lighting is	380 lm	-	911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	-	-	-	-

## Emergency Operation (2/2)

## CoreLine Panel gen6

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	-	-
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	-	-
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	-	-
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	-	-
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	-	-
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	-	-
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-	-
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	-	-
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	2 W	3 hour(s)
911401802887	RC132V G6 36S/840 WIA W30L120 OC	-	-
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-	-
911401890785	RC132V G6 36S/840 PSU W30L120 OC	-	-
911401891085	RC132V G6 36S/840 PSD W30L120 OC	-	-
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	-
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-	-
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-	-
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	-
911401888287	RC132V 60S/840 PSU W60L120 OC	-	-
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	2 W	3 hour(s)
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	2 W	3 hour(s)
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	2 W	3 hour(s)
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	-	-
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-	-
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-	-
911401800387	RC132V G6 50S/840 PSD W60L60 OC	-	-
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-	-
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-	-
911401802187	RC132V G6 34S/830 WIA W60L60 OC	-	-
911401802287	RC132V G6 36S/840 WIA W60L60 OC	-	-
911401802487	RC132V G6 43S/840 WIA W60L60 OC	-	-

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-	-
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	-	-
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	-	-
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	-	-
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-	-
911401807687	RC132V G6 34S/830 PSU W60L60 OC	-	-
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	-	-
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-	-
911401890585	RC132V G6 36S/840 PSU W60L60 OC	-	-
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-	-
910505102804	RC133V G6 36S/840 PSED W62L62 OC	-	-
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-	-
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-	-
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-	-
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-	-
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	-	-
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-	-
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	-	-
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	-	-
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-	-
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-	-
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	-	-
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	-	-
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	-	-
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCE	-	-
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	-	-
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-	-
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	-	-

# CoreLine Panel gen6

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-	-

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-	-
911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	-	-

## Approval and Application

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Fl	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Fl	Flickering value (PstLM) - Flickering value as per EN 61000-3
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s	1	
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401802887	RC132V G6 36S/840 WIA W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401890785	RC132V G6 36S/840 PSU W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401891085	RC132V G6 36S/840 PSD W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	

# CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flammability (F) value (PstLM) Flickering value as per EN 61000-3	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flammability (F) value (PstLM) Flickering value as per EN 61000-3
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401802287	RC132V G6 36S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401888287	RC132V 60S/840 PSU W60L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401802487	RC132V G6 43S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s	1	911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s	1	911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s	1	911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401807687	RC132V G6 34S/830 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401800387	RC132V G6 50S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401890585	RC132V G6 36S/840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401802187	RC132V G6 34S/830 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1						

# CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flammability (F) value (PstLM) Flickering value as per EN 61000-3	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flammability (F) value (PstLM) Flickering value as per EN 61000-3
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
910505102804	RC133V G6 36S/840 PSED W62L62 OC	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1	911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1

## Initial Performance (IEC Compliant)

# CoreLine Panel gen6

Order Code	Full Product Name	Initial chromaticity
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	(0.38, 0.38) SDCM ≤3
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	(0.43, 0.40) SDCM <3
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	(0.38, 0.38) SDCM ≤3
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	(0.38, 0.38) SDCM ≤3
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	(0.38, 0.38) SDCM ≤3
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	(0.38, 0.38) SDCM ≤3
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	(0.38, 0.38) SDCM ≤3
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	(0.38, 0.38) SDCM ≤3
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	(0.38, 0.38) SDCM ≤3
911401802887	RC132V G6 36S/840 WIA W30L120 OC	(0.38, 0.38) SDCM ≤3
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	(0.38, 0.38) SDCM ≤3
911401890785	RC132V G6 36S/840 PSU W30L120 OC	(0.38, 0.38) SDCM ≤3
911401891085	RC132V G6 36S/840 PSD W30L120 OC	(0.38, 0.38) SDCM ≤3
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	(0.38, 0.38) SDCM ≤3
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	(0.38, 0.38) SDCM ≤3
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	(0.38, 0.38) SDCM ≤3
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	(0.38, 0.38) SDCM ≤3
911401888287	RC132V 60S/840 PSU W60L120 OC	(0.38, 0.38) SDCM ≤3
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401800387	RC132V G6 50S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	(0.38, 0.38) SDCM ≤3
911401802187	RC132V G6 34S/830 WIA W60L60 OC	(0.43, 0.40) SDCM ≤3
911401802287	RC132V G6 36S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401802487	RC132V G6 43S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	(0.38, 0.38) SDCM ≤3

Order Code	Full Product Name	Initial chromaticity
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	(0.43, 0.40) SDCM ≤3
911401807687	RC132V G6 34S/830 PSU W60L60 OC	(0.43, 0.40) SDCM ≤3
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	(0.38, 0.38) SDCM ≤3
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
911401890585	RC132V G6 36S/840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401890885	RC132V G6 36S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
910505102804	RC133V G6 36S/840 PSED W62L62 OC	(0.38, 0.38) SDCM ≤3
911401802687	RC133V G6 36S/840 WIA W62L62 OC	(0.38, 0.38) SDCM ≤3
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	(0.38, 0.38) SDCM ≤3
911401890685	RC133V G6 36S/840 PSU W62L62 OC	(0.38, 0.38) SDCM ≤3
911401890985	RC133V G6 36S/840 PSD W62L62 OC	(0.38, 0.38) SDCM ≤3
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	(0.38, 0.38) SDCM ≤3
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	(0.38, 0.38) SDCM ≤3
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	(0.43, 0.40) SDCM <3
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	(0.38, 0.38) SDCM ≤3
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	(0.38, 0.38) SDCM ≤3
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	(0.38, 0.38) SDCM ≤3
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	(0.38, 0.38) SDCM ≤3
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	(0.38, 0.38) SDCM ≤3
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OCCE	(0.38, 0.38) SDCM ≤3
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	(0.38, 0.38) SDCM ≤3
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	(0.38, 0.38) SDCM ≤3
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	(0.38, 0.38) SDCM ≤3
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	(0.38, 0.38) SDCM ≤3

## Product Data

Order Code	Full Product Name	Product family code
910505102802	RC132V G6 43S/840 SIA W60L60 OC IA4	RC132V
910505102803	RC132V G6 40S/830 SIA W60L60 OC IA4	RC132V
910505102822	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	RC132V
910505102825	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	RC132V
910505102826	RC132V G6 43S/830_40 PSD W30L120 OC WA5	RC132V
910505102830	RC132V G6 43S/830_40 WIA W30L120 OCWA3	RC132V
911401801187	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-
911401807487	RC132V G6 40_43S/830_40 WIA 30x120 OC	-
910505102819	RC132V G6 36S/840 PSU W30L120 OC ELB3	RC132V
911401802887	RC132V G6 36S/840 WIA W30L120 OC	-
911401890485	RC132V G6 36S/840 PSU W30L120 NOC	-
911401890785	RC132V G6 36S/840 PSU W30L120 OC	-
911401891085	RC132V G6 36S/840 PSD W30L120 OC	-


Order Code	Full Product Name	Product family code
911401891685	RC132V G6 50S/940 PSU W60L60 NOC IP65	-
911401891785	RC132V G6 48S/940 PSU W60L60 OC IP65	-
911401891885	RC132V G6 48S/940 PSD W60L60 OC IP65	-
911401891585	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-
911401888287	RC132V 60S/840 PSU W60L120 OC	-
910505102816	RC132V G6 36S/840 PSU W60L60 OC ELB3	RC132V
910505102817	RC132V G6 36S/840 PSD W60L60 OC ELB3	RC132V
910505102818	RC132V G6 36S/840 WIA W60L60 OC ELB3	RC132V
911401800087	RC132V G6 36S/UE840 PSU W60L60 NOC	-
911401800187	RC132V G6 36S/UE840 PSU W60L60 OC	-
911401800287	RC132V G6 36S/UE840 PSD W60L60 OC	-
911401800387	RC132V G6 50S/840 PSD W60L60 OC	-
911401800687	RC132V G6 36S/840 PSU W60L60 OC BN	-

# CoreLine Panel gen6


Order Code	Full Product Name	Product family code
911401800887	RC132V G6 36S/840 PSU W60L60 OC BN6	-
911401802187	RC132V G6 34S/830 WIA W60L60 OC	-
911401802287	RC132V G6 36S/840 WIA W60L60 OC	-
911401802487	RC132V G6 43S/840 WIA W60L60 OC	-
911401806987	RC132V G6 43S/840 PSU W60L60 OC BN	-
911401807087	RC132V G6 43S/840 PSU W60L60 NOC BN	-
911401807187	RC132V G6 50S/840 PSU W60L60 OC BN	-
911401807287	RC132V G6 36S/UE840 WIA W60L60 OC	-
911401807587	RC132V G6 34S/830 PSU W60L60 NOC	-
911401807687	RC132V G6 34S/830 PSU W60L60 OC	-
911401830488	RC132V G6 31_43S/840 PSU ELR IK03 60x60	-
911401890285	RC132V G6 36S/840 PSU W60L60 NOC	-
911401890585	RC132V G6 36S/840 PSU W60L60 OC	-
911401890885	RC132V G6 36S/840 PSD W60L60 OC	-
910505102804	RC133V G6 36S/840 PSED W62L62 OC	RC132V
911401802687	RC133V G6 36S/840 WIA W62L62 OC	-
911401890385	RC133V G6 36S/840 PSU W62L62 NOC	-
911401890685	RC133V G6 36S/840 PSU W62L62 OC	-

Order Code	Full Product Name	Product family code
911401890985	RC133V G6 36S/840 PSD W62L62 OC	-
911401801787	RC132V G6 31_36_43S/940 PSD W60L60 OC	-
911401818787	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-
910505104636	RC132V G6 43S/840 SIA W30L120 OC IA4	RC132V
910505104637	RC132V G6 40S/830 SIA W30L120 OC IA4	RC132V
911401801387	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-
911401801487	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-
910505102821	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	RC132V
910505102823	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	RC132V
910505102824	RC132V G6 43S/830_40 PSD W60L60 OC WA5	RC132V
910505102828	RC132V G6 40/43S/830_840 WIAW60L60OC CCE	RC132V
910505102829	RC132V G6 43S/830_40 WIA W60L60 OC WA3	RC132V
911401801287	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-
911401807387	RC132V G6 40_43S/830_40 WIA 60x60 OC	-
911401891185	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-
911401891285	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-
911401888487	RC132V G6 36S/UE840 PSD 599x599SQ OC CPC	-


## Polar Wide Diagrams

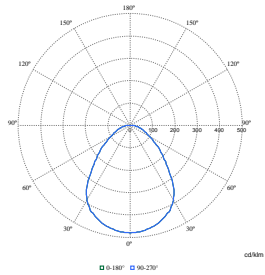


Polar Normal (separate) - RC132VI - 910505102804




Polar Normal (separate) - RC132VI - 910505102803




Polar Normal (separate) - RC132VI - 910505102818



Polar Normal (separate) - RC132VI - 910505102817




Polar Normal (separate) - RC132VI - 910505102829




Polar Normal (separate) - RC132VI - 910505102830


## Polar Wide Diagrams




Polar Normal (separate) - RC132VI - 910505102825




Polar Normal (separate) - RC132VI - 910505102821




Polar Normal (separate) - RC132VI - 910505102822




Polar Normal (separate) - RC132VI - 910505102824




Polar Normal (separate) - RC132VI - 910505102819




Polar Normal (separate) - RC132VI - 910505102826



Polar Normal (separate) - RC132VI - 910505102802





Polar Normal (separate) - RC132VI - 910505102816




Polar Normal (separate) - RC132VI - 910505102828

## Polar Wide Diagrams

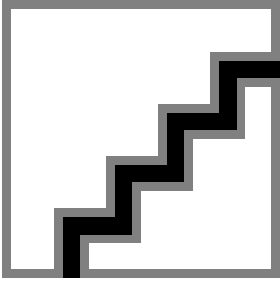


Polar Normal (separate) - RC132VI - 910505102823




Polar Normal (separate) - 911401891085


Polar Normal (separate) - 911401890385

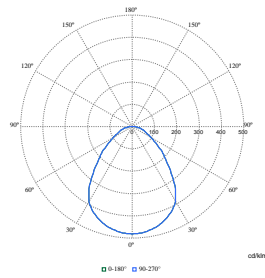


Polar Normal (separate) - 911401890685

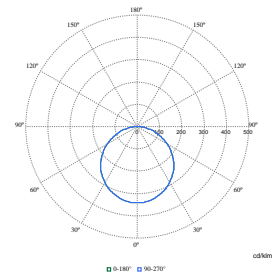


Polar Normal (separate) - 911401890485

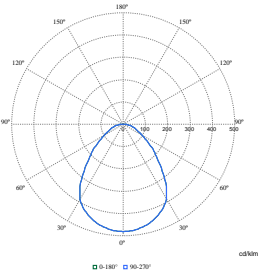


Polar Normal (separate) - 911401890985

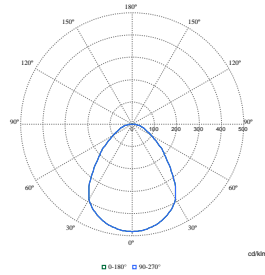


Polar Normal (separate) - 911401890785

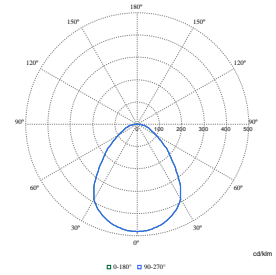


Polar Normal (separate) - 911401890885

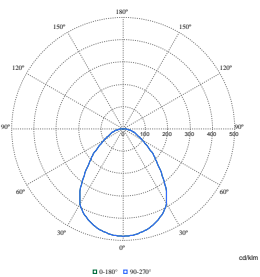

Polar Normal (separate) - 911401891285

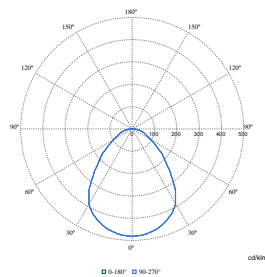

Polar Normal (separate) - 911401890585



Polar Normal (separate) - 911401891185







## CoreLine Panel gen6

