



Install smarter, finish sooner Choose long-lasting reliability and performance

CoreLine Panel gen6

Philips CoreLine panel Gen6 delivers on the CoreLine promise of innovation, easy installation, and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative All-in feature offers a choice of three lumen packages and three-color temperatures in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing the CoreLine RC132V LED panel is quick and easy, using the product's quick connector or flywire. The CoreLine range includes Interact Ready luminaires with integrated wireless communications, ready to be used with Interact gateways, sensors, and software.

Benefits

- Low-risk, reliable products
- Work faster with these easy-to-install products
- No confusion with easy product selection
- Stay relevant by joining IoT / connected lighting systems

CoreLine Panel gen6

Features

- L90@50K hrs/ L80@100K hrs with 5-year warranty
- Quick connector (green/white, Flywire, WAGO, and Schuko)
- High lumen office-compliant and non-office compliant versions
- CRI 80/CRI 90 at SDCM <3
- CRI 80 4000 K 140 lm/Wand 3000 K > 130 lm/W, CRI 90 >115 lm/W
- UltraEfficient 4000 K >160 lm/W
- All-in: multiple lumen packages and color temperatures in one luminaire

Application


- Offices
- Healthcare
- Municipal buildings
- Education

Versions










CoreLine panel G6 W60L60 IP65-IP20

Dimensional drawing

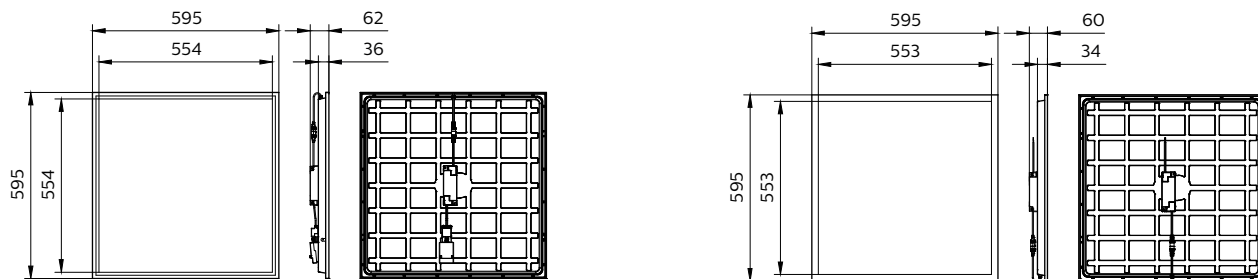


CoreLine Panel gen6

Dimensional drawing

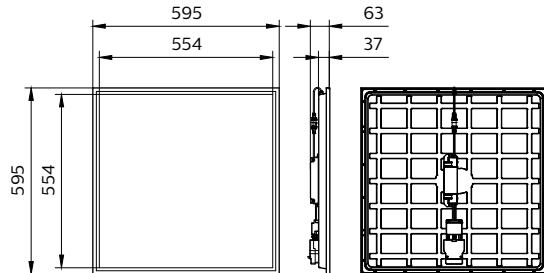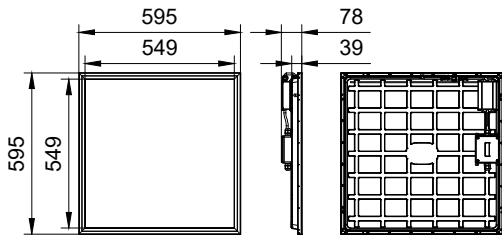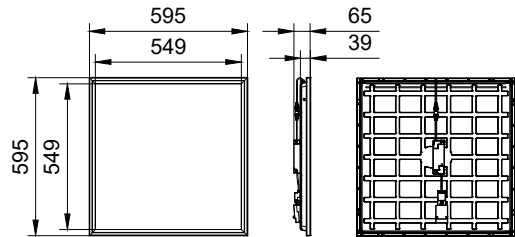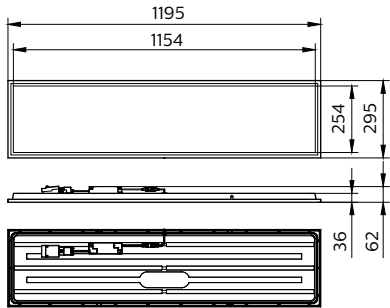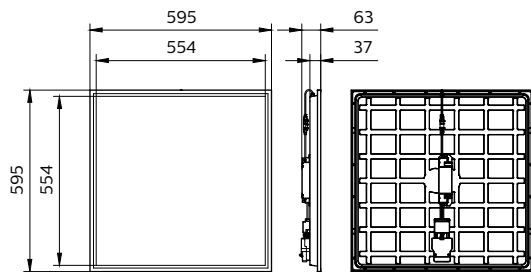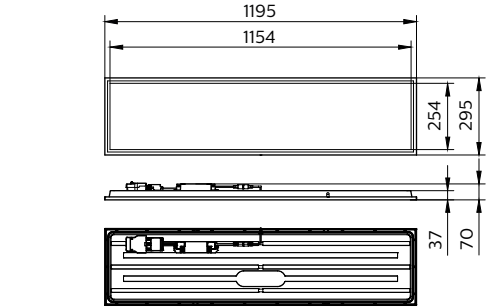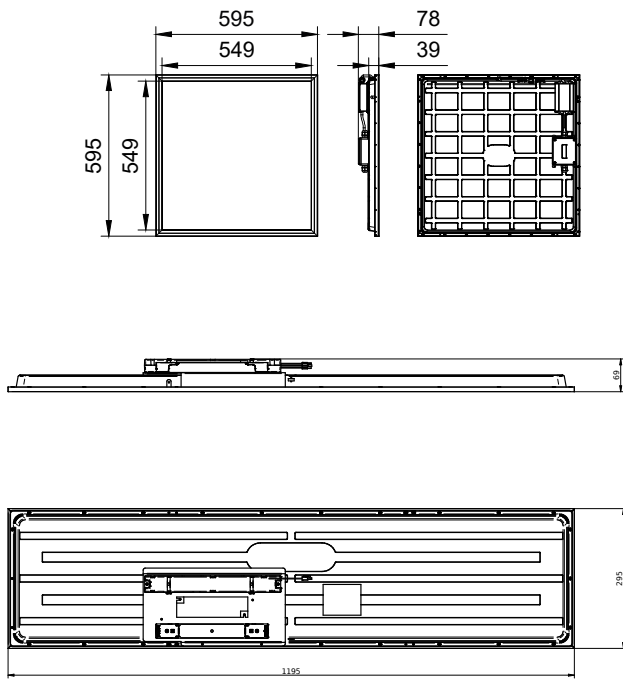


CoreLine Panel gen6

Dimensional drawing

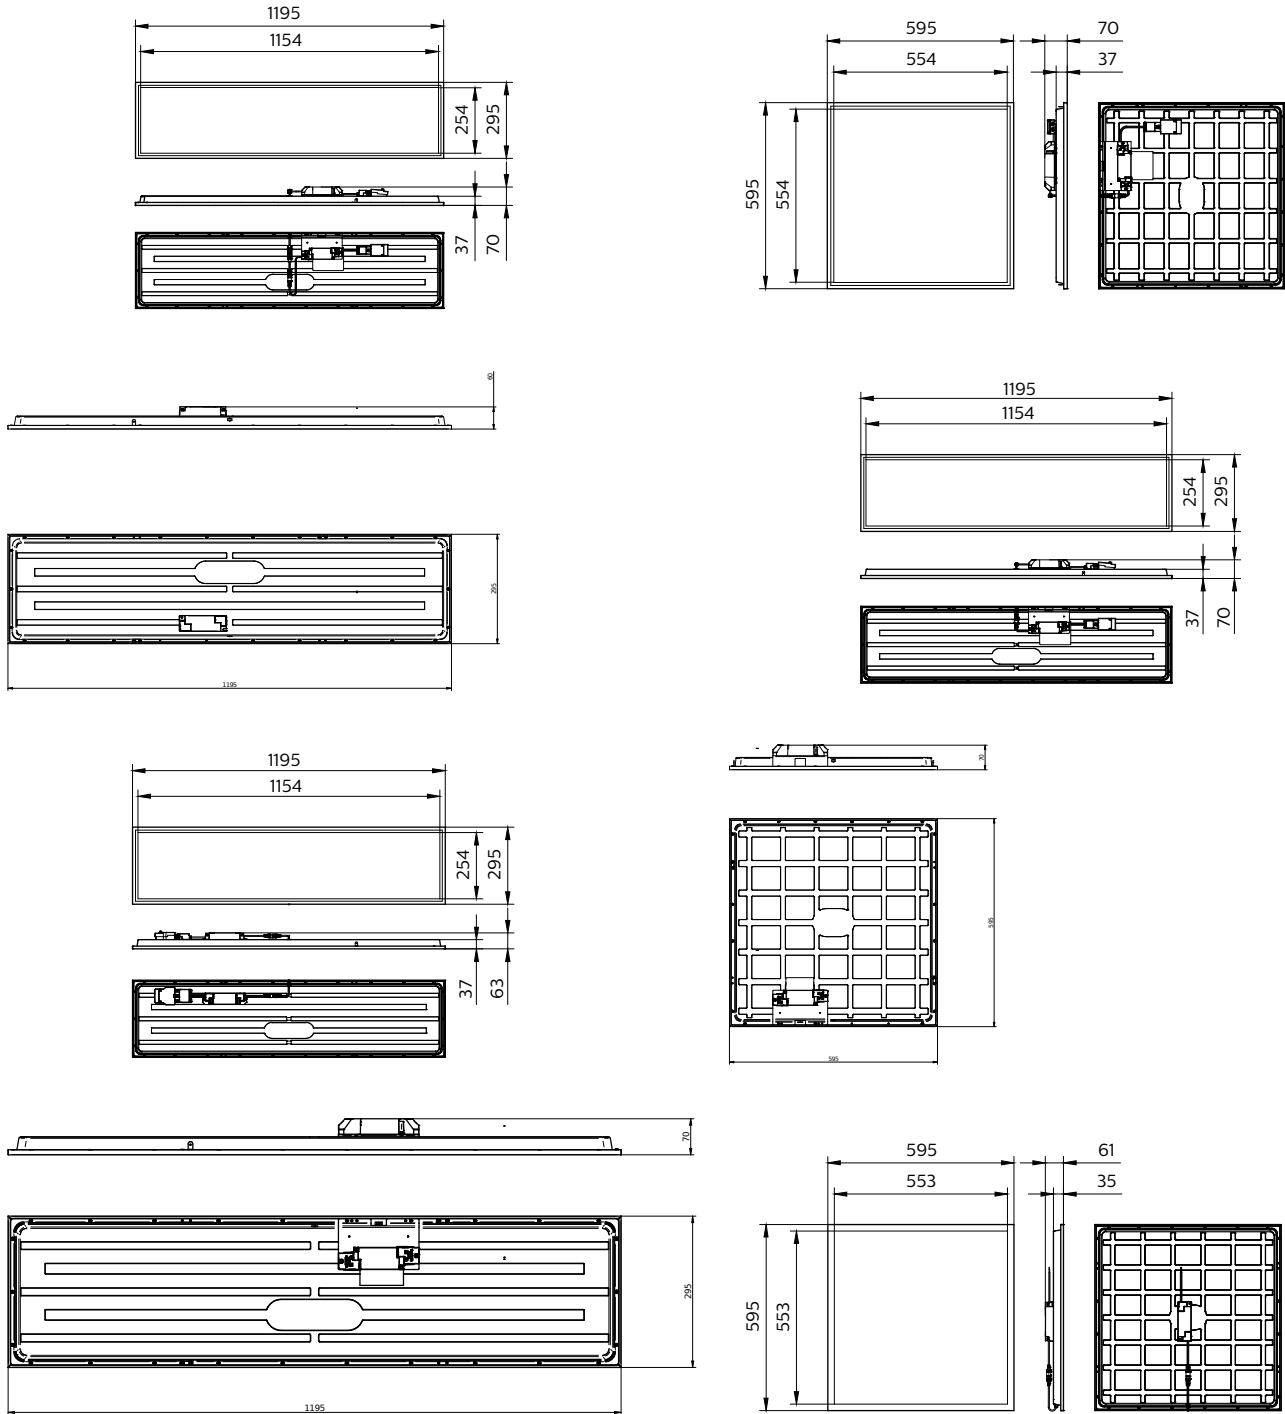






CoreLine Panel gen6

Dimensional drawing

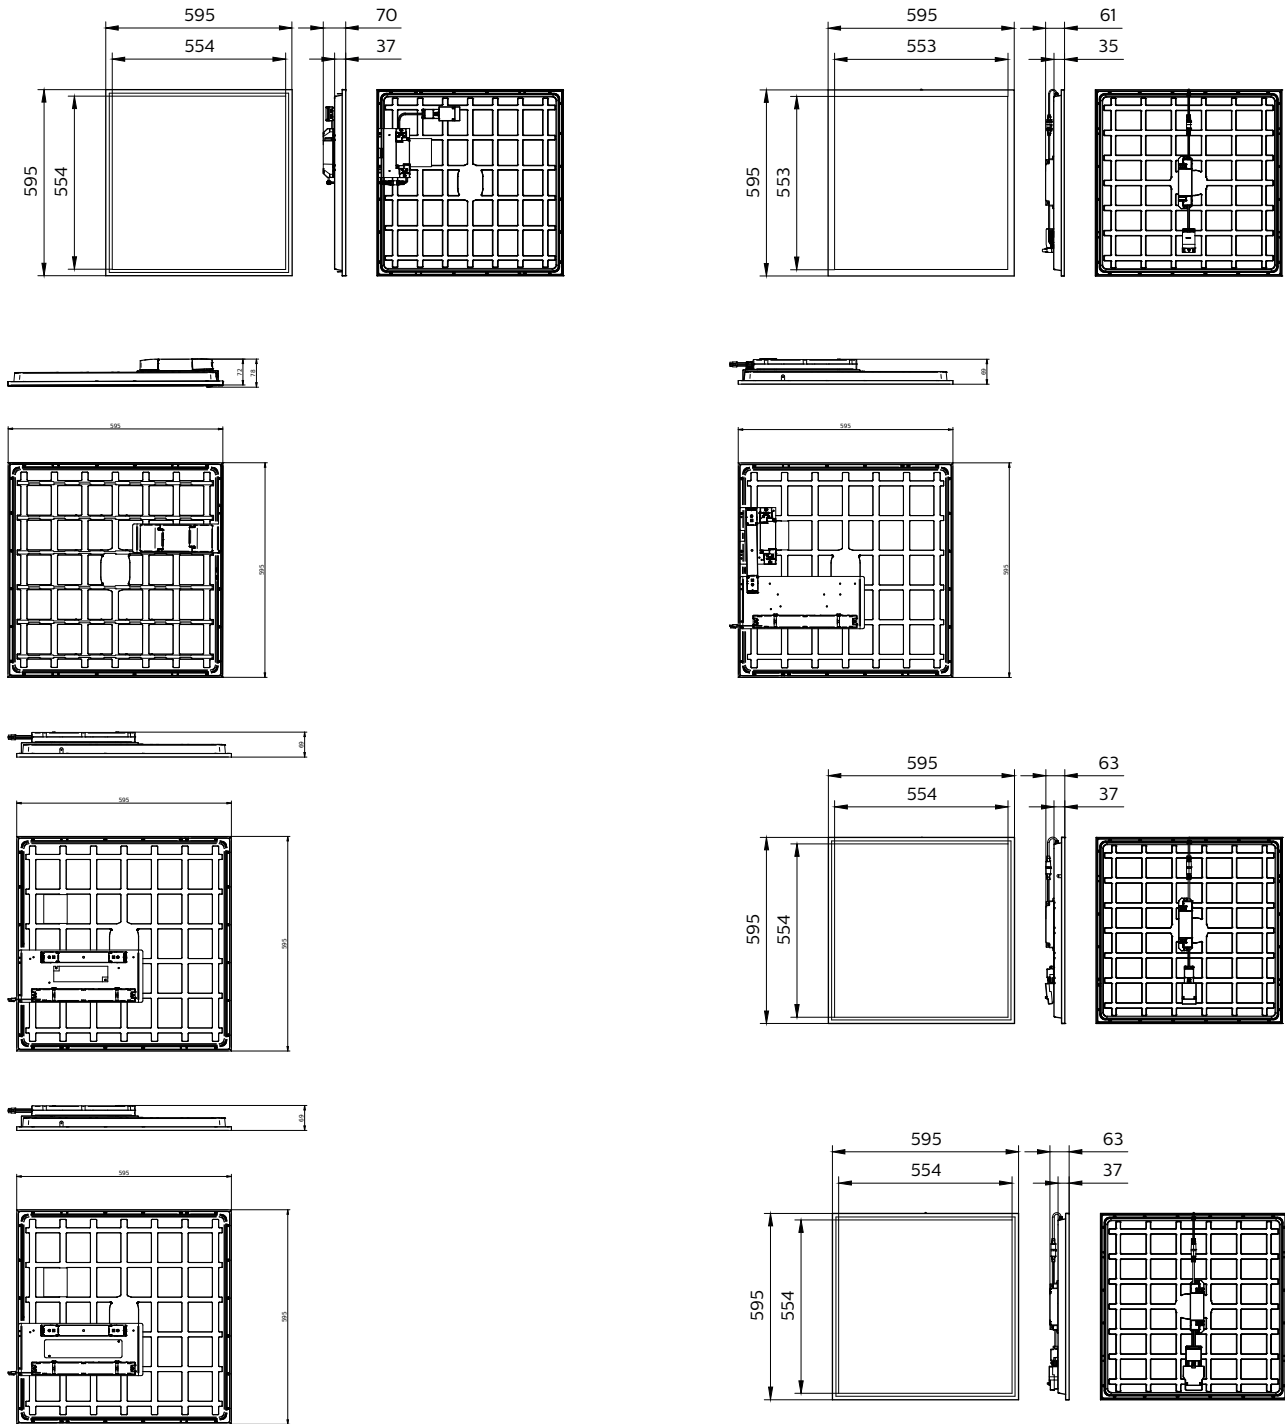

CoreLine Panel gen6

Dimensional drawing

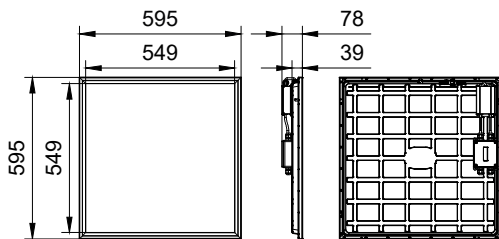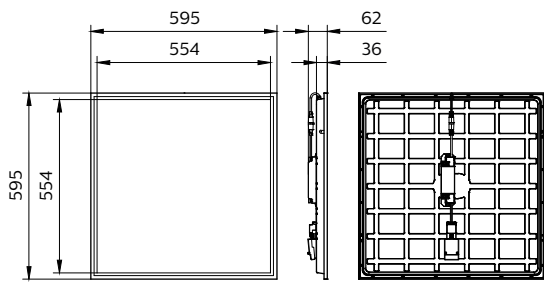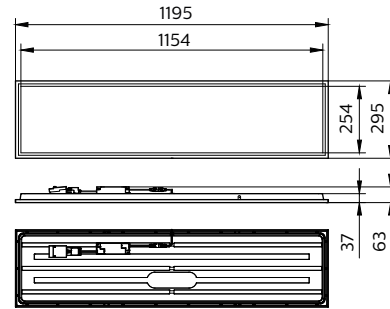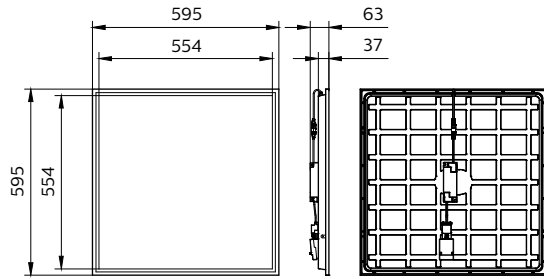

Product details

CoreLine panel G6 PSU Green
connector fits Wieland W3
connector



CoreLine connector Wago WA3



CoreLine Panel gen6


Product details



CoreLine panel G6 PSU W60L60
back side DPP



CoreLine panel G6 IP65 PSU driver



CoreLine panel G6 PSU driver DPP




CoreLine panel G6 WIA back side
DPP



CoreLine panel G6 PSU W30L120
back side DPP



CoreLine panel G6 PSD W30L120
back side DPP




CoreLine panel G6 PSD driver
open DPP



CoreLine panel G6 PSD All in
W60L60 back side DPP



CoreLine panel G6 IP65 PSD driver



CoreLine panel G6 side angle DPP

CoreLine Panel gen6

Product details


CoreLine panel G6 back side IP65
IP20



CoreLine connector wago WA5



CoreLine panel G6 WIA driver DPP

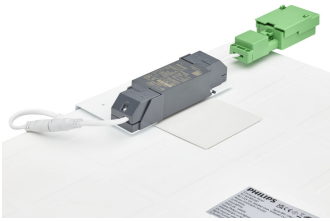

CoreLine panel G6 NOC Optical
window DPP




CoreLine panel G6 All in driver
open DPP



CoreLine panel G6 All in driver
DPP



CoreLine panel G6 PSU driver
open DPP



CoreLine panel G6 PSD W60L60
back side DPP



CoreLine connector Schuko CCE



CoreLine panel G6 IP65 PSD back
side



CoreLine Panel gen6


Product details



CoreLine panel G6 W60L60 OC
Optical window DPP



CoreLine panel G6 IP65 PSU back
side



CoreLine panel G6 PSD driver DPP

General Information

Driver included	Yes
Number of gear units	1 unit
Service tag	Yes

Operating and Electrical

Protection class IEC	Safety class II
----------------------	-----------------

Mechanical and Housing

Explosion hazard class	-
Housing Color	White

Emergency Operation

Central Emergency	No
-------------------	----

Approval and Application

CE mark	Yes
ENEC mark	ENEC mark
Stroboscopic effect visibility measure (SVM)	0.4

Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%
-------------------------	-------------

Light Technical (1/2)

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	-	90 degree(s)	4000 K	>80
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	-	90 degree(s)	3000 K	>80
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	All-in, Multi Color Temperature	90 degree(s)	4000 K	>80
75006799	RC132V G6 36S/840 WIA W30L120 OC	-	90 degree(s)	4000 K	>80
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-	120 degree(s)	4000 K	>80

CoreLine Panel gen6

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
73514999	RC132V G6 36S/840 PSU W30L120 OC	-	90 degree(s)	4000 K	>80
73517099	RC132V G6 36S/840 PSD W30L120 OC	-	90 degree(s)	4000 K	>80
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	120 degree(s)	4000 K	>90
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-	90 degree(s)	4000 K	>90
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-	90 degree(s)	4000 K	>90
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	120 degree(s)	4000 K	>80
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
74984999	RC132V G6 50S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-	90 degree(s)	4000 K	>80
74999399	RC132V G6 34S/830 WIA W60L60 OC	-	90 degree(s)	3000 K	>80
75000599	RC132V G6 36S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
75002999	RC132V G6 43S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-	120 degree(s)	4000 K	>80
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
75133099	RC132V G6 34S/830 PSU W60L60 NOC	-	120 degree(s)	3000 K	>80
75134799	RC132V G6 34S/830 PSU W60L60 OC	-	90 degree(s)	3000 K	>80

CoreLine Panel gen6

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
73509599	RC132V G6 36S/840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80
73512599	RC132V G6 36S/840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80
73515699	RC132V G6 36S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	4000 K	>80
75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	All-in, Multi Lumen	90 degree(s)	4000 K	>80
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	All-in, Multi Lumen	120 degree(s)	3000 K	>80
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80

Light Technical (2/2)

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	135 lm/W	4,300 lm	Beam angle 90°	58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	136 lm/W	2,900 lm	Beam angle 90°
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	126 lm/W	4,000 lm	Beam angle 90°	58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	135 lm/W	4,300 lm	Beam angle 90°
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	136 lm/W	2,900 lm	Beam angle 90°	58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	135 lm/W	4,300 lm	Beam angle 90°

CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	140 lm/W	2,900 lm	Beam angle 90°
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	140 lm/W	4,000 lm	Beam angle 90°
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
75006799	RC132V G6 36S/840 WIA W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
73511899	RC132V G6 36S/840 PSU W30L120 NOC	140 lm/W	3,600 lm	Beam angle 120°
73514999	RC132V G6 36S/840 PSU W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
73517099	RC132V G6 36S/840 PSD W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	110 lm/W	5,000 lm	Beam angle 120°
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	105 lm/W	4,800 lm	Beam angle 90°
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	105 lm/W	4,800 lm	Beam angle 90°
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	140 lm/W	3,600 lm	Beam angle 120°
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	160 lm/W	3,600 lm	Beam angle 120°
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	160 lm/W	3,600 lm	Beam angle 90°

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
74984999	RC132V G6 50S/840 PSD W60L60 OC	130 lm/W	5,000 lm	Beam angle 90°
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	140 lm/W	3,600 lm	Beam angle 90°
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	140 lm/W	3,600 lm	Beam angle 90°
74999399	RC132V G6 34S/830 WIA W60L60 OC	130 lm/W	3,400 lm	Beam angle 90°
75000599	RC132V G6 36S/840 WIA W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°
75002999	RC132V G6 43S/840 WIA W60L60 OC	140 lm/W	4,300 lm	Beam angle 90°
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	140 lm/W	4,300 lm	Beam angle 90°
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	140 lm/W	4,300 lm	Beam angle 120°
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	130 lm/W	5,000 lm	Beam angle 90°
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
75133099	RC132V G6 34S/830 PSU W60L60 NOC	130 lm/W	3,400 lm	Beam angle 120°
75134799	RC132V G6 34S/830 PSU W60L60 OC	130 lm/W	3,400 lm	Beam angle 90°
73509599	RC132V G6 36S/840 PSU W60L60 NOC	140 lm/W	3,600 lm	Beam angle 120°
73512599	RC132V G6 36S/840 PSU W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°
73515699	RC132V G6 36S/840 PSD W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°

CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)			Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)			Optic type
		Luminous Flux						Luminous Flux			
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	115 lm/W	3,100 lm		Beam angle 90°	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	135 lm/W	4,300 lm		Beam angle 90°
75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	140 lm/W	3,100 lm		Beam angle 90°	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	140 lm/W	2,900 lm		Beam angle 120°
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	136 lm/W	2,900 lm		Beam angle 90°	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	140 lm/W	4,000 lm		Beam angle 90°
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	136 lm/W	2,900 lm		Beam angle 90°	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	140 lm/W	2,900 lm		Beam angle 90°
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	135 lm/W	4,300 lm		Beam angle 90°	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	140 lm/W	2,900 lm		Beam angle 90°
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	135 lm/W	4,300 lm		Beam angle 90°						

Operating and Electrical

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching	Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	220-240 V	50 to 60 Hz	32 W	No	73517099	RC132V G6 36S/840 PSD W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	220-240 V	50 to 60 Hz	32 W	No	73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable
58879000	RC132VG6 29_36_43/830_40 PSU 30x120OCCCE	220-240 V	50 to 60 Hz	32 W	No	73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable
58882000	RC132VG6 29_36_43/830_40 PSU 30x120OCWA3	220-240 V	50 to 60 Hz	32 W	No	73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	220-240 V	50 to 60 Hz	32 W	No	73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	220 to 240 V	50 or 60 Hz	26 W	Not applicable
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	220-240 V	50 to 60 Hz	32 W	No	58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	220-240 V	50 to 60 Hz	27 W	No	74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable
75006799	RC132V G6 36S/840 WIA W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74982599	RC132V G6 36S/UE840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable
73511899	RC132V G6 36S/840 PSU W30L120 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74983299	RC132V G6 36S/UE840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable
73514999	RC132V G6 36S/840 PSU W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74984999	RC132V G6 50S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable

CoreLine Panel gen6

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching	Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	26 W	Not applicable	73515699	RC132V G6 36S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable
74999399	RC132V G6 34S/830 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	220 to 240 V	50 or 60 Hz	31 W	Not applicable
75000599	RC132V G6 36S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	220-240 V	50 to 60 Hz	32 W	No
75002999	RC132V G6 43S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	220-240 V	50 to 60 Hz	32 W	No
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	220-240 V	50 to 60 Hz	32 W	No
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	220-240 V	50 to 60 Hz	32 W	No
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	38 W	Not applicable	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	220-240 V	50 to 60 Hz	32 W	No
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
75133099	RC132V G6 34S/830 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
75134799	RC132V G6 34S/830 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
73509599	RC132V G6 36S/840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
73512599	RC132V G6 36S/840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable						

Controls and Dimming

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level	Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	Yes	Interact SC200 sensor	10%	58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	-	Not applicable
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	Yes	Interact SC200 sensor	10%	75006799	RC132V G6 36S/840 WIA W30L120 OC	Yes	-	1%
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	No	-	Not applicable	73511899	RC132V G6 36S/840 PSU W30L120 NOC	No	-	Not applicable
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	Not applicable	73514999	RC132V G6 36S/840 PSU W30L120 OC	No	-	Not applicable
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	Yes	-	10%	73517099	RC132V G6 36S/840 PSD W30L120 OC	Yes	-	1%
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	Yes	-	10%	73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	Not applicable
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	Yes	-	1%	73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	Not applicable
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	Yes	-	1%	73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	Yes	-	1%
					73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	Not applicable

CoreLine Panel gen6

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	-	Not applicable
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	Yes	-	10%
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	Yes	-	10%
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	No	-	Not applicable
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	Not applicable
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	Yes	-	1%
74984999	RC132V G6 50S/840 PSD W60L60 OC	Yes	-	1%
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	Not applicable
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	Not applicable
74999399	RC132V G6 34S/830 WIA W60L60 OC	Yes	-	1%
75000599	RC132V G6 36S/840 WIA W60L60 OC	Yes	-	1%
75002999	RC132V G6 43S/840 WIA W60L60 OC	Yes	-	1%
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	Not applicable
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	No	-	Not applicable
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	Not applicable
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	Yes	-	1%

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
75133099	RC132V G6 34S/830 PSU W60L60 NOC	No	-	Not applicable
75134799	RC132V G6 34S/830 PSU W60L60 OC	No	-	Not applicable
73509599	RC132V G6 36S/840 PSU W60L60 NOC	No	-	Not applicable
73512599	RC132V G6 36S/840 PSU W60L60 OC	No	-	Not applicable
73515699	RC132V G6 36S/840 PSD W60L60 OC	Yes	-	1%
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	Yes	-	1%
75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	No	-	Not applicable
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	Not applicable
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	Not applicable
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	Yes	-	10%
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	Yes	-	10%
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	Yes	-	10%
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	No	-	Not applicable
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	Yes	-	1%
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	No	-	Not applicable
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	Yes	-	1%

Mechanical and Housing

Order Code	Full Product Name	Mech. impact protection code	Ingress protection code
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	IK02	IP20
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	IK02	IP20
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	IK02	IP20/44
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	IK02	IP20/44
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	IK02	IP20/44
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	IK02	IP20/44
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	IK02	IP20/44

Order Code	Full Product Name	Mech. impact protection code	Ingress protection code
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	IK02	IP20/44
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	IK03	IP20/44
75006799	RC132V G6 36S/840 WIA W30L120 OC	IK02	IP20/44
73511899	RC132V G6 36S/840 PSU W30L120 NOC	IK03	IP20/44
73514999	RC132V G6 36S/840 PSU W30L120 OC	IK02	IP20/44
73517099	RC132V G6 36S/840 PSD W30L120 OC	IK02	IP20/44
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	IK03	IP65
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	IK03	IP65
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	IK03	IP65
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	IK03	IP20/65
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	IK03	IP20/44

CoreLine Panel gen6

Order Code	Full Product Name	Mech. impact protection code	Ingress protection code
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	IK03	IP20/44
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	IK03	IP20/44
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	IK03	IP20/44
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	IK02	IP20/44
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	IK02	IP20/44
74984999	RC132V G6 50S/840 PSD W60L60 OC	IK02	IP20/44
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	IK02	IP20/40
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	IK02	IP20/40
74999399	RC132V G6 34S/830 WIA W60L60 OC	IK02	IP20/44
75000599	RC132V G6 36S/840 WIA W60L60 OC	IK02	IP20/44
75002999	RC132V G6 43S/840 WIA W60L60 OC	IK02	IP20/44
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	IK02	IP20/40
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	IK03	IP20/40
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	IK02	IP20/40
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	IK02	IP20/44
75133099	RC132V G6 34S/830 PSU W60L60 NOC	IK03	IP20/44
75134799	RC132V G6 34S/830 PSU W60L60 OC	IK02	IP20/44
73509599	RC132V G6 36S/840 PSU W60L60 NOC	IK03	IP20/44
73512599	RC132V G6 36S/840 PSU W60L60 OC	IK02	IP20/44
73515699	RC132V G6 36S/840 PSD W60L60 OC	IK02	IP20/44

Order Code	Full Product Name	Mech. impact protection code	Ingress protection code
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	IK02	IP20/44
75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	IK02	IP20/40
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	IK02	IP20/44
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	IK02	IP20/44
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	IK02	IP20/44
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	IK02	IP20/44
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	IK02	IP20/44
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	IK03	IP20/44
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	IK02	IP20/44
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	IK02	IP20/44
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	IK02	IP20/44

Emergency Operation (1/2)

Order Code	Full Product Name	Emergency lighting	Emergency flux	Type of emergency lighting battery	Power consum during emerge mode	Order Code	Full Product Name	Emergency lighting	Emergency flux	Type of emergency lighting battery	Power consumption during emerge mode
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	-	-	-	-			duration basic version			
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	-	-	-	-	75006799	RC132V G6 36S/840 WIA W30L120 OC	-	-	-	-
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	-	-	-	-	73511899	RC132V G6 36S/840 PSU W30L120 NOC	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	-
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	-	-	-	-						
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	-	-	-	-						
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	-	-	-	-						
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-	-	-	-	73514999	RC132V G6 36S/840 PSU W30L120 OC	-	-	-	-
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-	-	-	-	73517099	RC132V G6 36S/840 PSD W30L120 OC	-	-	-	-
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	Emergency lighting 3 hours	250 lm	Lithium	2 W	73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	-	-	-
						73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-	-	-	-

CoreLine Panel gen6

Order Code	Full Product Name	Emergency lighting	Emergency flux	Type of emergency lighting battery	Power consumption during emergency mode	Order Code	Full Product Name	Emergency lighting	Emergency flux	Type of emergency lighting battery	Power consumption during emergency mode
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-	-	-	-			lighting is possible when used with a compatible battery kit accessory			
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	-	-	-						
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	Emergency lighting 3 hours duration basic version	250 lm	Lithium	2 W	75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-	-	-	-
						75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-	-	-	-
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	Emergency lighting 3 hours duration basic version	250 lm	Lithium	2 W	75133099	RC132V G6 34S/830 PSU W60L60 NOC	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	-
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	Emergency lighting 3 hours duration basic version	250 lm	Lithium	2 W	75134799	RC132V G6 34S/830 PSU W60L60 OC	-	-	-	-
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	-	73509599	RC132V G6 36S/840 PSU W60L60 NOC	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	-
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-	-	-	-	73512599	RC132V G6 36S/840 PSU W60L60 OC	-	-	-	-
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-	-	-	-	73515699	RC132V G6 36S/840 PSD W60L60 OC	-	-	-	-
74984999	RC132V G6 50S/840 PSD W60L60 OC	-	-	-	-	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-	-	-	-
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-	-	-	-	75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-	-	-	-
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-	-	-	-	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	-	-	-	-
74999399	RC132V G6 34S/830 WIA W60L60 OC	-	-	-	-	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	-	-	-	-
75000599	RC132V G6 36S/840 WIA W60L60 OC	-	-	-	-	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	-	-	-	-
75002999	RC132V G6 43S/840 WIA W60L60 OC	-	-	-	-	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	-	-	-	-
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-	-	-	-	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	-	-	-	-
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	Self-contained emergency	380 lm	-	-						

CoreLine Panel gen6

Order Code	Full Product Name	Emergency lighting	Emergency flux	Type of emergency lighting battery	Power consumption during emergency mode	Order Code	Full Product Name	Emergency lighting	Emergency flux	Type of emergency lighting battery	Power consumption during emergency mode
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	Self-contained emergency lighting is possible when used with a compatible	380 lm	-	-			battery kit accessory			
						75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-	-	-	-
						73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-	-	-	-
						73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-	-	-	-

Emergency Operation (2/2)

Order Code	Full Product Name	Rated duration of the emergency lighting (when fully charged)	Order Code	Full Product Name	Rated duration of the emergency lighting (when fully charged)
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	-	75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	-	74999399	RC132V G6 34S/830 WIA W60L60 OC	-
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	-	75000599	RC132V G6 36S/840 WIA W60L60 OC	-
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	-	75002999	RC132V G6 43S/840 WIA W60L60 OC	-
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	-	75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	-	75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-	75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-	75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	3 hour(s)	75133099	RC132V G6 34S/830 PSU W60L60 NOC	-
75006799	RC132V G6 36S/840 WIA W30L120 OC	-	75134799	RC132V G6 34S/830 PSU W60L60 OC	-
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-	73509599	RC132V G6 36S/840 PSU W60L60 NOC	-
73514999	RC132V G6 36S/840 PSU W30L120 OC	-	73512599	RC132V G6 36S/840 PSU W60L60 OC	-
73517099	RC132V G6 36S/840 PSD W30L120 OC	-	73515699	RC132V G6 36S/840 PSD W60L60 OC	-
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-	75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	-
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	-
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	3 hour(s)	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	-
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	3 hour(s)	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCE	-
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	3 hour(s)	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	-
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-
74984999	RC132V G6 50S/840 PSD W60L60 OC	-	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-			

Approval and Application

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flicker value (PstLI) Flicker value per EI 61001	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flicker value (PstLM) - Flickering value as per EN 61000-3-3
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	0 °C to 35 °C	-	Temperature 1 650 °C, duration 30 s	1	73517099	RC132V G6 36S/840 PSD W30L120 OC	-10 to +35 °C	flammable surfaces	duration 30 s	1
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	0 °C to 35 °C	-	Temperature 1 650 °C, duration 30 s	1	73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-10 to +35 °C	flammable surfaces	duration 30 s	1
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	0 °C to 35 °C	-	Temperature 1 650 °C, duration 30 s	1	73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-10 to +35 °C	flammable surfaces	duration 30 s	1
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	0 °C to 35 °C	-	Temperature 1 650 °C, duration 30 s	1	73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-10 to +35 °C	flammable surfaces	duration 30 s	1
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	0 °C to 35 °C	-	Temperature 1 650 °C, duration 30 s	1	73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-10 to +35 °C	flammable surfaces	duration 30 s	1
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	0 °C to 35 °C	-	Temperature 1 650 °C, duration 30 s	1	58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 1 850 °C, duration 30 s	1
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 1 650 °C, duration 30 s	1	58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 1 850 °C, duration 30 s	1
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 1 650 °C, duration 30 s	1	58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 1 850 °C, duration 30 s	1
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	0 °C to 35 °C	-	Temperature 1 850 °C, duration 30 s	1	74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-10 to +35 °C	flammable surfaces	duration 30 s	1
75006799	RC132V G6 36S/840 WIA W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 1 650 °C, duration 30 s	1	74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-10 to +35 °C	flammable surfaces	duration 30 s	1
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 1 650 °C, duration 30 s	1	74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-10 to +35 °C	flammable surfaces	duration 30 s	1
73514999	RC132V G6 36S/840 PSU W30L120 OC	-10 to +35 °C	For mounting on normally	Temperature 1 650 °C,	1				flammable surfaces	duration 30 s	

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flicker value (PstLI) Flicker value per EI Order 61001	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flicker value (PstLM) - Flickering value as per EN 61000-3-3
74984999	RC132V G6 50S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	73509599	RC132V G6 36S/840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	73512599	RC132V G6 36S/840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	73515699	RC132V G6 36S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
74999399	RC132V G6 34S/830 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	0.5
75000599	RC132V G6 36S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
75002999	RC132V G6 43S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s	1
75133099	RC132V G6 34S/830 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1
75134799	RC132V G6 34S/830 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1						

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flicke value (PstLI)	Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test	Flickering value (PstLM) - Flickering value as
					per EI 61001						per EN 61000-3-3
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1						flammable surfaces duration 30 s
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s	1

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial chromaticity	Order Code	Full Product Name	Initial chromaticity
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	(0.38, 0.38) SDCM ≤3	75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	(0.38, 0.38) SDCM ≤3
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	(0.43, 0.40) SDCM <3	74999399	RC132V G6 34S/830 WIA W60L60 OC	(0.43, 0.40) SDCM ≤3
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	(0.38, 0.38) SDCM ≤3	75000599	RC132V G6 36S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	(0.38, 0.38) SDCM ≤3	75002999	RC132V G6 43S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	(0.38, 0.38) SDCM ≤3	75127999	RC132V G6 43S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	(0.38, 0.38) SDCM ≤3	75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	(0.38, 0.38) SDCM ≤3
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	(0.38, 0.38) SDCM ≤3	75129399	RC132V G6 50S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	(0.38, 0.38) SDCM ≤3	75130999	RC132V G6 36S/UE840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	(0.38, 0.38) SDCM ≤3	75133099	RC132V G6 34S/830 PSU W60L60 NOC	(0.43, 0.40) SDCM ≤3
75006799	RC132V G6 36S/840 WIA W30L120 OC	(0.38, 0.38) SDCM ≤3	75134799	RC132V G6 34S/830 PSU W60L60 OC	(0.43, 0.40) SDCM ≤3
73511899	RC132V G6 36S/840 PSU W30L120 NOC	(0.38, 0.38) SDCM ≤3	73509599	RC132V G6 36S/840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
73514999	RC132V G6 36S/840 PSU W30L120 OC	(0.38, 0.38) SDCM ≤3	73512599	RC132V G6 36S/840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
73517099	RC132V G6 36S/840 PSD W30L120 OC	(0.38, 0.38) SDCM ≤3	73515699	RC132V G6 36S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	(0.38, 0.38) SDCM ≤3	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	(0.38, 0.38) SDCM ≤3	75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	(0.38, 0.38) SDCM ≤3
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	(0.38, 0.38) SDCM ≤3	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	(0.38, 0.38) SDCM ≤3
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	(0.38, 0.38) SDCM ≤3	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	(0.38, 0.38) SDCM ≤3
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	(0.38, 0.38) SDCM ≤3
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCE	(0.38, 0.38) SDCM ≤3
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	(0.38, 0.38) SDCM ≤3
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	(0.38, 0.38) SDCM ≤3
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	(0.38, 0.38) SDCM ≤3
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
74984999	RC132V G6 50S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3			

Product Data


Order Code	Full Product Name	Product family code	Order Code	Full Product Name	Product family code
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	RC132V	74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	RC132V	75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	RC132V	58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	RC132V
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	RC132V	75006799	RC132V G6 36S/840 WIA W30L120 OC	-
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	RC132V	73511899	RC132V G6 36S/840 PSU W30L120 NOC	-
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	RC132V	73514999	RC132V G6 36S/840 PSU W30L120 OC	-

CoreLine Panel gen6


Order Code	Full Product Name	Product family code
73517099	RC132V G6 36S/840 PSD W30L120 OC	-
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	RC132V
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	RC132V
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	RC132V
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-
74984999	RC132V G6 50S/840 PSD W60L60 OC	-
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-
74999399	RC132V G6 34S/830 WIA W60L60 OC	-
75000599	RC132V G6 36S/840 WIA W60L60 OC	-
75002999	RC132V G6 43S/840 WIA W60L60 OC	-
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-

Order Code	Full Product Name	Product family code
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-
75133099	RC132V G6 34S/830 PSU W60L60 NOC	-
75134799	RC132V G6 34S/830 PSU W60L60 OC	-
73509599	RC132V G6 36S/840 PSU W60L60 NOC	-
73512599	RC132V G6 36S/840 PSU W60L60 OC	-
73515699	RC132V G6 36S/840 PSD W60L60 OC	-
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-
75509399	RC132V G6 31_36_43S/840 PSU W60L60OCUKI	-
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	RC132V
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	RC132V
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	RC132V
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCE	RC132V
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	RC132V
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-


Polar Wide Diagrams

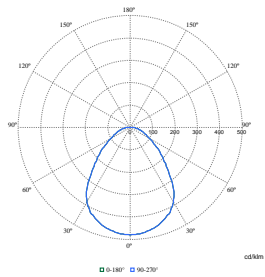


Polar Normal (separate) - RC132VI - 910505102803




Polar Normal (separate) - RC132VI - 910505102818




Polar Normal (separate) - RC132VI - 910505102817



Polar Normal (separate) - RC132VI - 910505102829




Polar Normal (separate) - RC132VI - 910505102830




Polar Normal (separate) - RC132VI - 910505102825


Polar Wide Diagrams




Polar Normal (separate) - RC132VI - 910505102821




Polar Normal (separate) - RC132VI - 910505102822




Polar Normal (separate) - RC132VI - 910505102824




Polar Normal (separate) - RC132VI - 910505102819




Polar Normal (separate) - RC132VI - 910505102826




Polar Normal (separate) - RC132VI - 910505102802




Polar Normal (separate) - RC132VI - 910505102816




Polar Normal (separate) - RC132VI - 910505102828




Polar Normal (separate) - RC132VI - 910505102823



Polar Normal (separate) - 911401891085




Polar Normal (separate) - 911401890485




Polar Normal (separate) - 911401890785

CoreLine Panel gen6


Polar Wide Diagrams




Polar Normal (separate) - 911401802287




Polar Normal (separate) - 911401800287

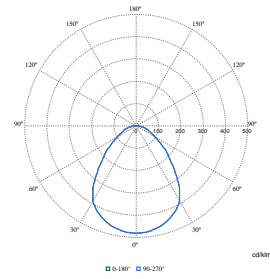


Polar Normal (separate) - 911401802487

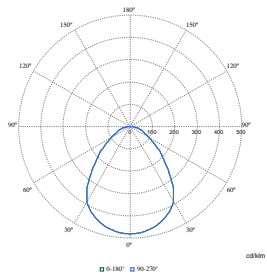


Polar Normal (separate) - 911401801187

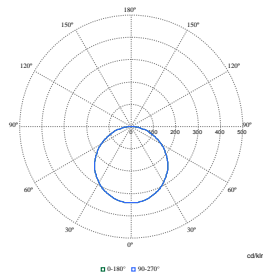


Polar Normal (separate) - 911401800087

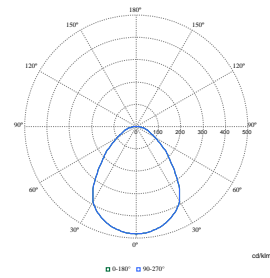


Polar Normal (separate) - 911401801787

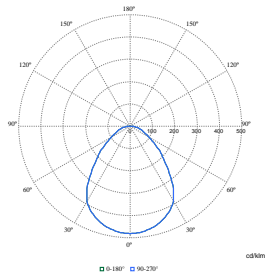


Polar Normal (separate) - 911401807687

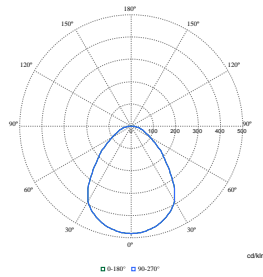


Polar Normal (separate) - 911401807287

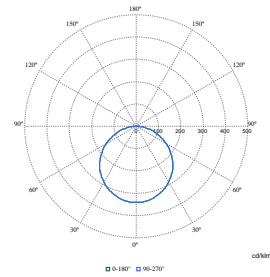


Polar Normal (separate) - 911401807587

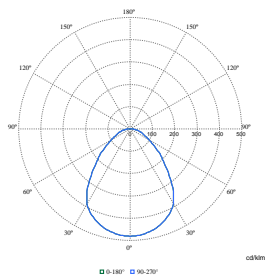

Polar Normal (separate) - 911401807387

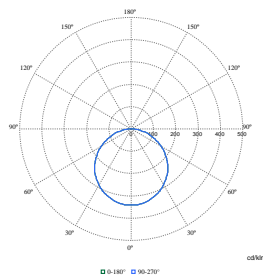


Polar Normal (separate) - 911401807087




Polar Normal (separate) - 911401807187

CoreLine Panel gen6


Polar Wide Diagrams

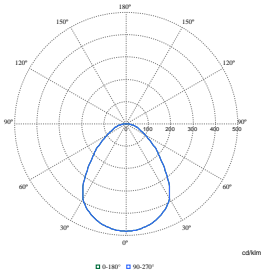


Polar Normal (separate) - 911401807487




Polar Normal (separate) - 911401806987

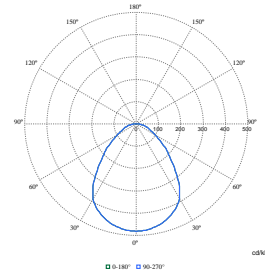


Polar Normal (separate) - 911401818787

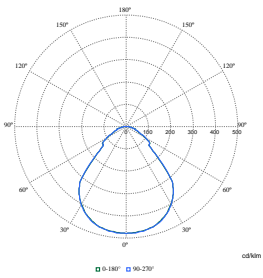


Polar Normal (separate) - 911401891685

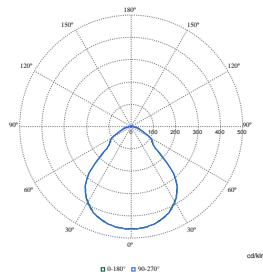

Polar Normal (separate) - 911401891785

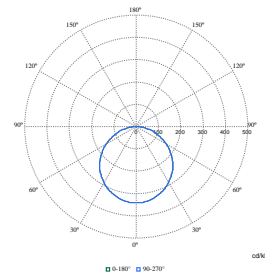

Polar Normal (separate) - 911401891585

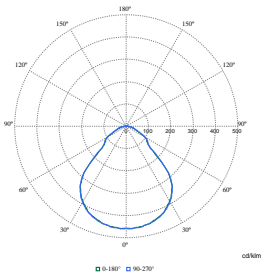

Polar Normal (separate) - 911401891885

