



Install smarter, finish sooner Choose long-lasting reliability and performance

CoreLine Panel gen6

Philips CoreLine panel Gen6 delivers on the CoreLine promise of innovation, easy installation, and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative All-in feature offers a choice of three lumen packages and three-color temperatures in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing the CoreLine RC132V LED panel is quick and easy, using the product's quick connector or flywire. The CoreLine range includes Interact Ready luminaires with integrated wireless communications, ready to be used with Interact gateways, sensors, and software.

Benefits

- Low-risk, reliable products
- Work faster with these easy-to-install products
- No confusion with easy product selection
- Stay relevant by joining IoT / connected lighting systems

CoreLine Panel gen6

Features

- L90@50K hrs/ L80@100K hrs with 5-year warranty
- Quick connector (green/white, Flywire, WAGO, and Schuko)
- High lumen office-compliant and non-office compliant versions
- CRI 80/CRI 90 at SDCM <3
- CRI 80 4000 K 140 lm/Wand 3000 K > 130 lm/W, CRI 90 >115 lm/W
- UltraEfficient 4000 K >160 lm/W
- All-in: multiple lumen packages and color temperatures in one luminaire

Application

- Offices
- Healthcare
- Municipal buildings
- Education

Versions



CoreLine panel G5 SIA with Sensor
front side



CoreLine panel G6 W60L60 IP65-
IP20



CoreLine Panel G6 W60xL120 RTP



CoreLine panel G6 W62L62 RTP











Philips CoreLine panel G6 All in
MultiLumen W60L60



CoreLine panel G6 PSU W30L120
SIA Sensor RTP


CoreLine Panel gen6

Dimensional drawing

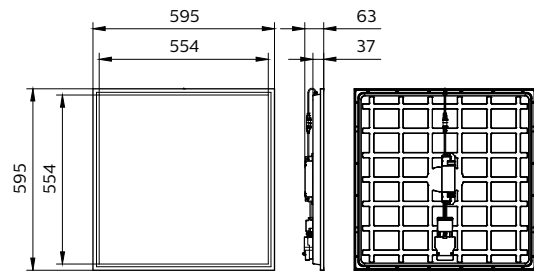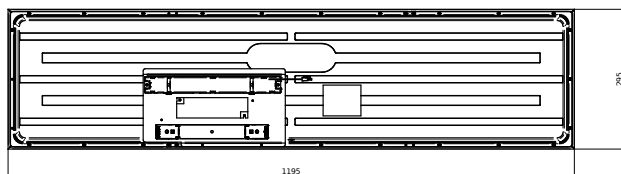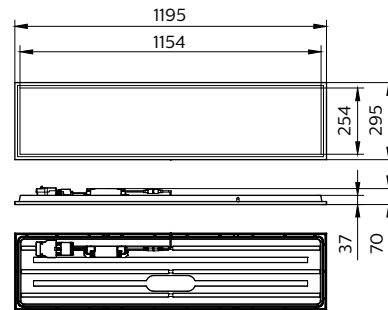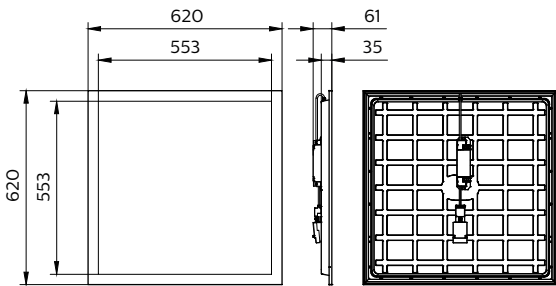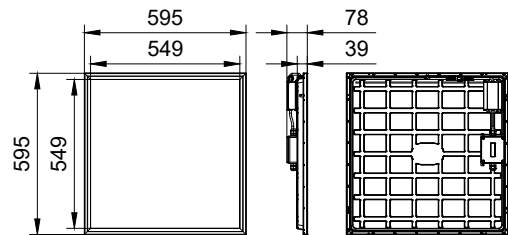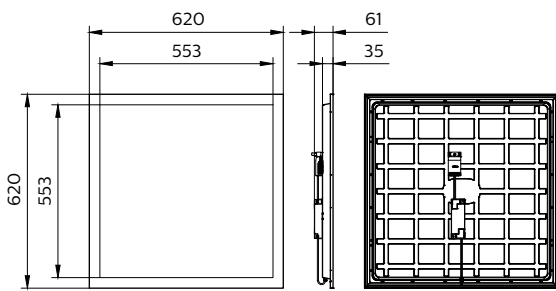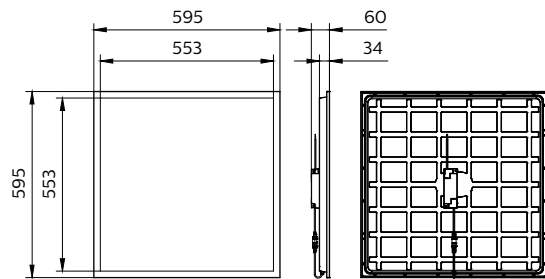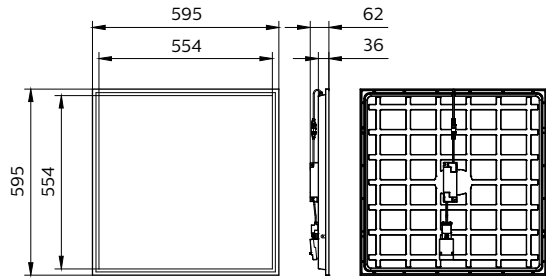


CoreLine Panel gen6

Dimensional drawing

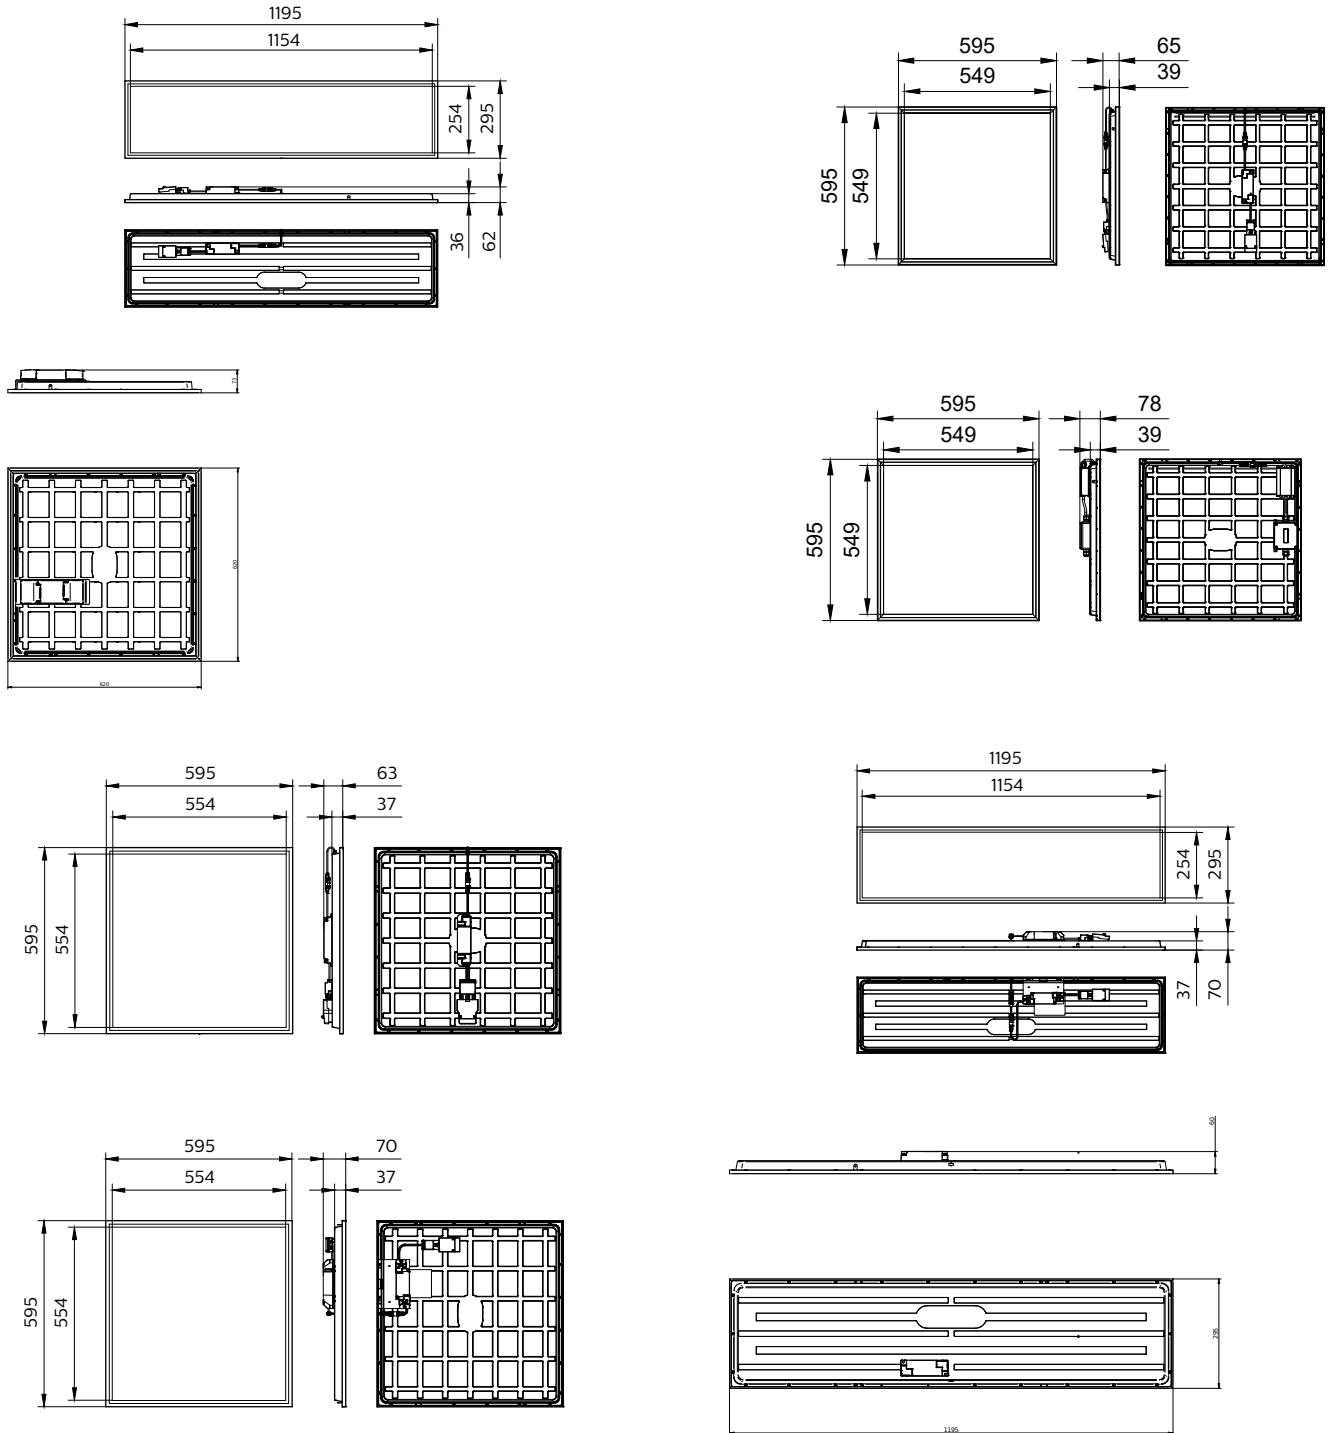









CoreLine Panel gen6

Dimensional drawing

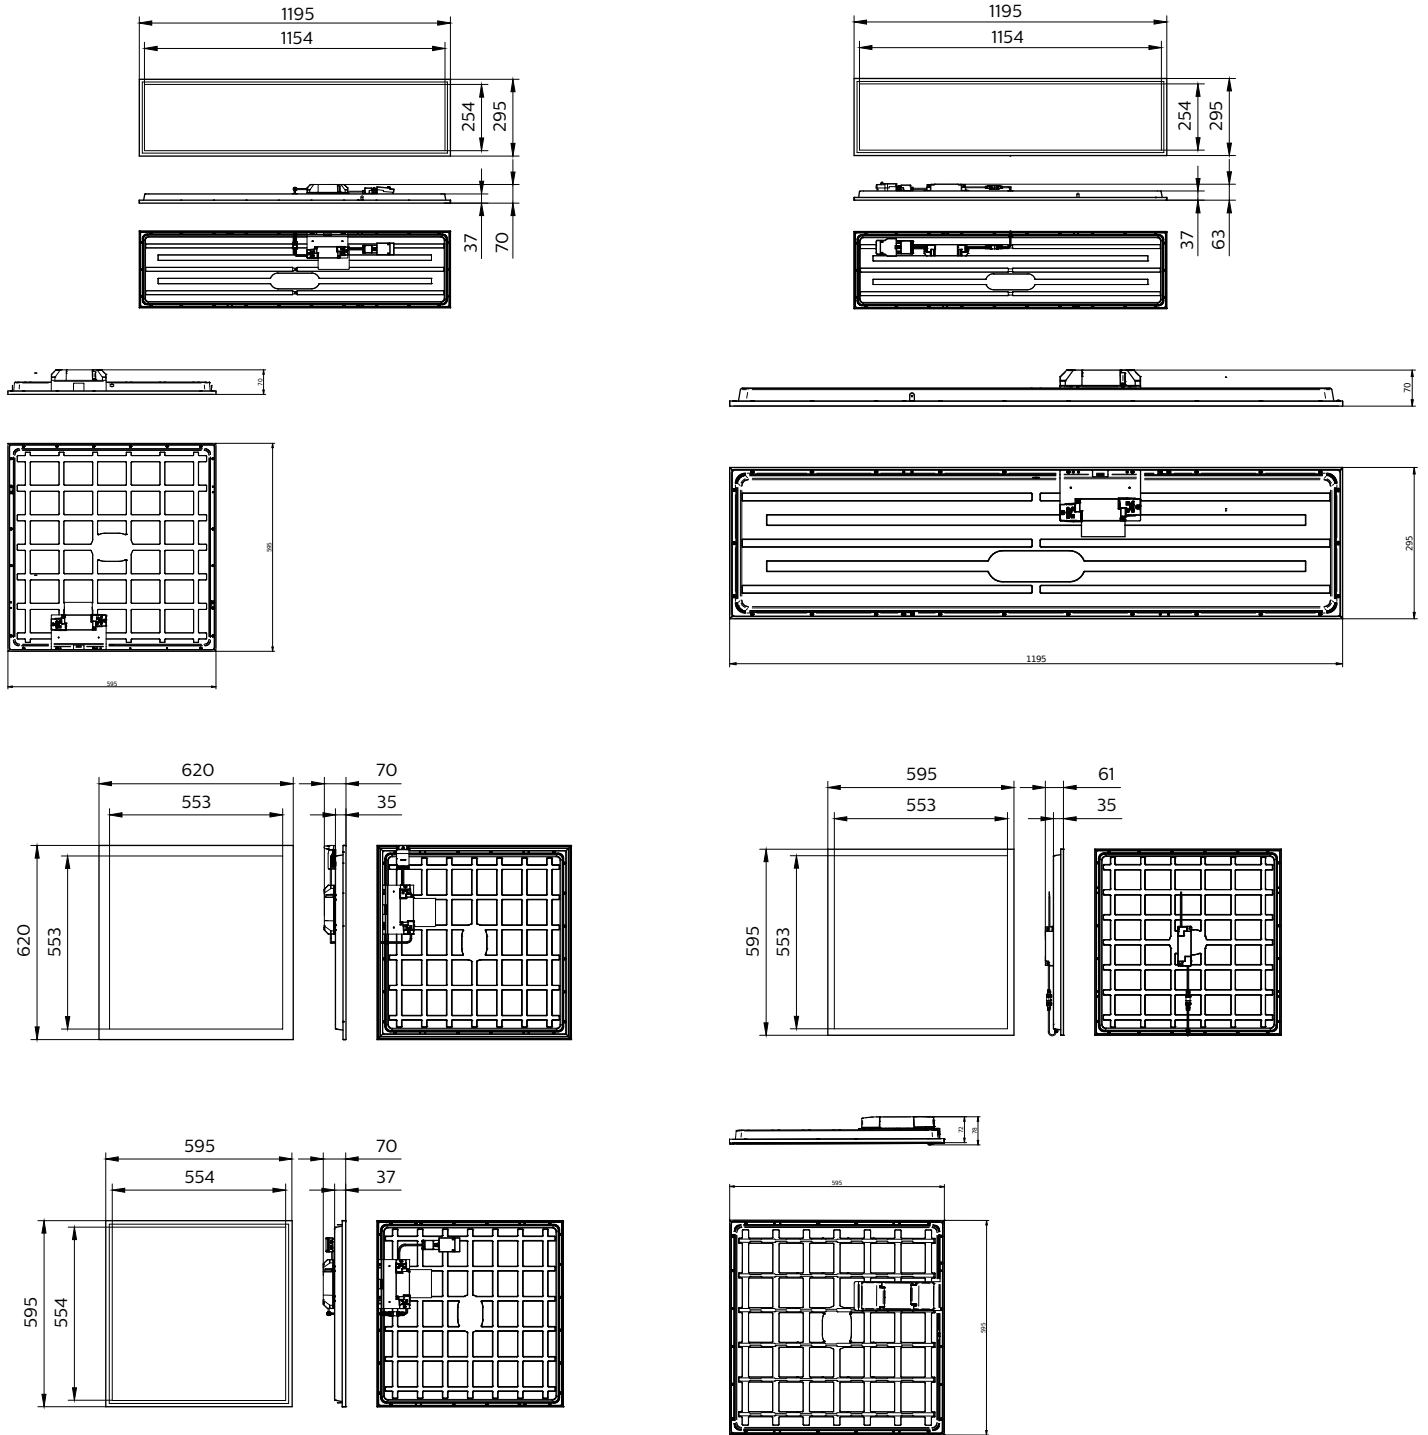







CoreLine Panel gen6

Dimensional drawing

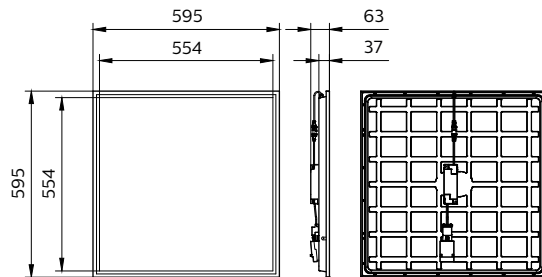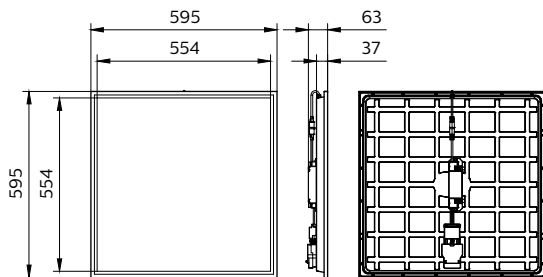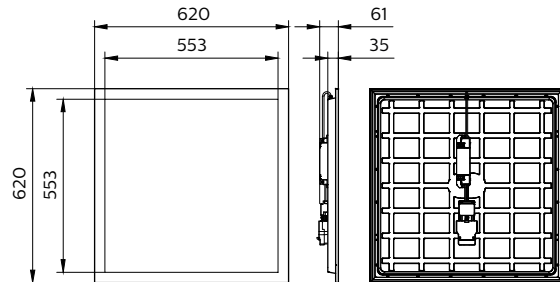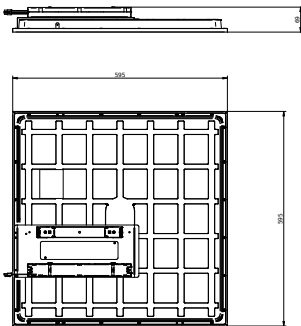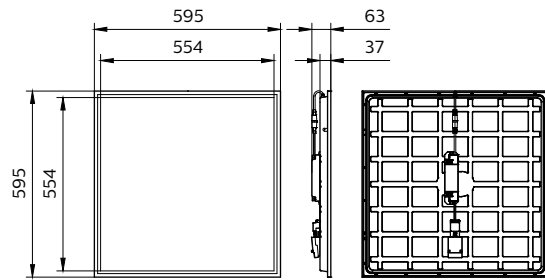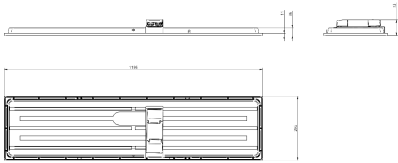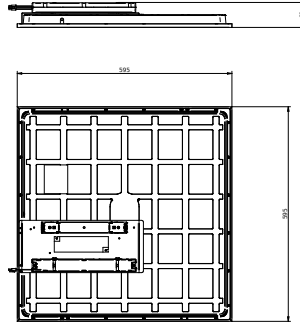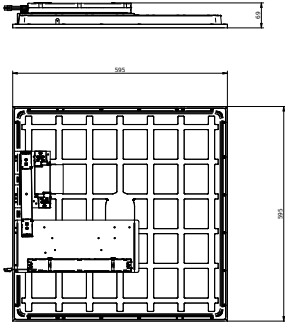

CoreLine Panel gen6

Dimensional drawing

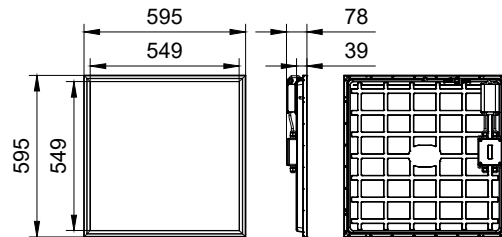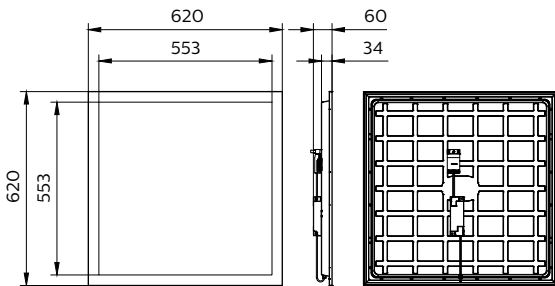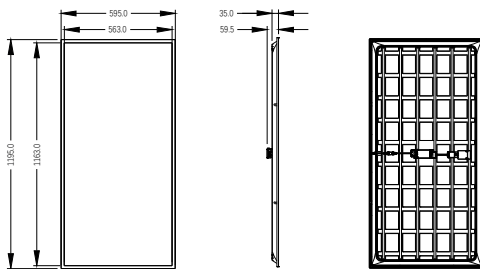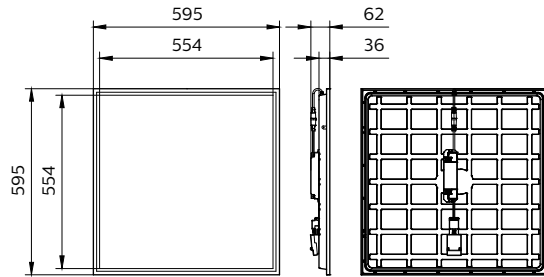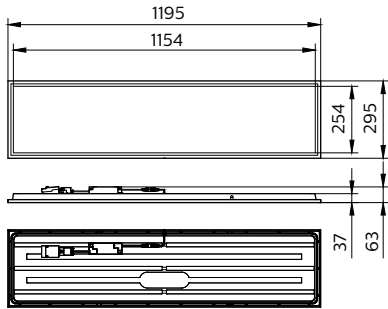

Product details

CoreLine panel G6 PSU Green
connector fits Wieland W3
connector



CoreLine connector Wago WA3



CoreLine Panel gen6

Product details




CoreLine panel G6 PSU W60L60
back side DPP



CoreLine panel G6 IP65 PSU driver



CoreLine panel G6 PSU W30L120
SIA Sensor back side DPP



CoreLine panel G6 PSU driver DPP



CoreLine panel G6 WIA back side
DPP



CoreLine panel G6 W62L62 OC
Optical window DPP



CoreLine panel G6 WIA W62L62
back side DPP



CoreLine panel G6 PSU W30L120
back side DPP



CoreLine panel G6 PSD W30L120
back side DPP



CoreLine panel G6 PSD driver
open DPP

CoreLine Panel gen6

Product details


CoreLine panel G6 PSD All in W60L60 back side DPP



CoreLine panel G6 IP65 PSD driver



CoreLine panel G6 side angle DPP



CoreLine panel G6 back side IP65 IP20



CoreLine connector wago WA5



CoreLine panel G6 WIA driver DPP



CoreLine panel G6 NOC Optical window DPP



CoreLine panel G6 All in driver open DPP




CoreLine panel G6 All in driver DPP



CoreLine Panel gen6

Product details



CoreLine panel G6 PSU driver
open DPP



CoreLine panel G6 PSD W60L60
back side DPP



CoreLine connector Schuko CCE



CoreLine panel G6 IP65 PSD back
side




CoreLine panel G6 W60L60 OC
Optical window DPP



CoreLine panel G6 IP65 PSU back
side



CoreLine panel G6 PSU W62L62
back side DPP



CoreLine panel G6 PSD driver DPP

CoreLine Panel gen6

General Information

Driver included	Yes
Number of gear units	1 unit

Operating and Electrical

Protection class IEC	Safety class II
----------------------	-----------------

Mechanical and Housing

Explosion hazard class	-
Housing Color	White

Approval and Application

CE mark	Yes
ENEC mark	ENEC mark
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4

Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%
-------------------------	-------------

General Information

Order Code	Full Product Name	Service tag
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	Yes
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	Yes
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	Yes
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	Yes
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	Yes
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	Yes
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	Yes
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	Yes
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	Yes
75006799	RC132V G6 36S/840 WIA W30L120 OC	Yes
73511899	RC132V G6 36S/840 PSU W30L120 NOC	Yes
73514999	RC132V G6 36S/840 PSU W30L120 OC	Yes
73517099	RC132V G6 36S/840 PSD W30L120 OC	Yes
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	Yes
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	Yes
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	Yes
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	Yes
31142999	RC132V 60S/840 PSU W60L120 OC	-
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	Yes
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	Yes
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	Yes
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	Yes
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	Yes
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	Yes
74984999	RC132V G6 50S/840 PSD W60L60 OC	Yes
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	Yes
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	Yes
74999399	RC132V G6 34S/830 WIA W60L60 OC	Yes
75000599	RC132V G6 36S/840 WIA W60L60 OC	Yes
75002999	RC132V G6 43S/840 WIA W60L60 OC	Yes
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	Yes
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	Yes
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	Yes
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	Yes
75133099	RC132V G6 34S/830 PSU W60L60 NOC	Yes
75134799	RC132V G6 34S/830 PSU W60L60 OC	Yes
73509599	RC132V G6 36S/840 PSU W60L60 NOC	Yes
73512599	RC132V G6 36S/840 PSU W60L60 OC	Yes
73515699	RC132V G6 36S/840 PSD W60L60 OC	Yes
58861500	RC133V G6 36S/840 PSED W62L62 OC	Yes
75004399	RC133V G6 36S/840 WIA W62L62 OC	Yes
73510199	RC133V G6 36S/840 PSU W62L62 NOC	Yes
73513299	RC133V G6 36S/840 PSU W62L62 OC	Yes
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	Yes
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	-
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	Yes
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	Yes
58878300	RC132VG6_29_36_43/830_40 PSU 60x60OC CCE	Yes
58880600	RC132VG6_29_36_43/830_40 PSU 60x60OC WA3	Yes
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	Yes
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCE	Yes

CoreLine Panel gen6

Order Code	Full Product Name	Service tag
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	Yes
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	Yes
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	Yes
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	Yes
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	Yes

Light Technical (1/2)

Order Code	Full Product Name	All-in Type	Beam	Correlated	Color	Order Code	Full Product Name	All-in Type	Beam	Correlated	Color
			angle of light source	Color Temperature (Nom)	index (CRI)				angle of light source	Color Temperature (Nom)	index (CRI)
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	-	90 degree(s)	4000 K	>80	58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	-	90 degree(s)	3000 K	>80	58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80	58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	-	90 degree(s)	4000 K	>80
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80	74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80	74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80
						74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80	74984999	RC132V G6 50S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80
						74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80	74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80	75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-	90 degree(s)	4000 K	>80
						74999399	RC132V G6 34S/830 WIA W60L60 OC	-	90 degree(s)	3000 K	>80
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	All-in, Multi Color Temperature	90 degree(s)	4000 K	>80	75000599	RC132V G6 36S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
						75002999	RC132V G6 43S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
75006799	RC132V G6 36S/840 WIA W30L120 OC	-	90 degree(s)	4000 K	>80	75002999	RC132V G6 43S/840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-	120 degree(s)	4000 K	>80	75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
73514999	RC132V G6 36S/840 PSU W30L120 OC	-	90 degree(s)	4000 K	>80	75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-	120 degree(s)	4000 K	>80
73517099	RC132V G6 36S/840 PSD W30L120 OC	-	90 degree(s)	4000 K	>80	75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-	90 degree(s)	4000 K	>80
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	120 degree(s)	4000 K	>90	75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-	90 degree(s)	4000 K	>80
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-	90 degree(s)	4000 K	>90	75133099	RC132V G6 34S/830 PSU W60L60 NOC	-	120 degree(s)	3000 K	>80
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-	90 degree(s)	4000 K	>90	75134799	RC132V G6 34S/830 PSU W60L60 OC	-	90 degree(s)	3000 K	>80
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	120 degree(s)	4000 K	>80	73509599	RC132V G6 36S/840 PSU W60L60 NOC	-	120 degree(s)	4000 K	>80
31142999	RC132V 60S/840 PSU W60L120 OC	-	-	4000 K	>80	73512599	RC132V G6 36S/840 PSU W60L60 OC	-	90 degree(s)	4000 K	>80

CoreLine Panel gen6

Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)	Order Code	Full Product Name	All-in Type	Beam angle of light source	Correlated Color Temperature (Nom)	Color rendering index (CRI)
73515699	RC132V G6 36S/840 PSD W60L60 OC	-	90 degree(s)	4000 K	>80	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	All-in, Multi Lumen	90 degree(s)	3000 K	>80
58861500	RC133V G6 36S/840 PSED W62L62 OC	-	90 degree(s)	4000 K	>80	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
75004399	RC133V G6 36S/840 WIA W62L62 OC	-	90 degree(s)	4000 K	>80	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
73510199	RC133V G6 36S/840 PSU W62L62 NOC	-	120 degree(s)	4000 K	>80	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
73513299	RC133V G6 36S/840 PSU W62L62 OC	-	90 degree(s)	4000 K	>80	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	All-in, Multi Lumen	120 degree(s)	3000 K	>80
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	4000 K	>90	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	All-in, Multi Color Temperature	90 degree(s)	3000 K	>80
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	-	90 degree(s)	4000 K	>80	73518799	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	All-in, Multi Lumen	90 degree(s)	3000 K	>80						
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	All-in, Multi Lumen	90 degree(s)	3000 K	>80						

Light Technical (2/2)

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	135 lm/W	4,300 lm	Beam angle 90°	75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	140 lm/W	4,000 lm	Beam angle 90°
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	126 lm/W	4,000 lm	Beam angle 90°	58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	136 lm/W	2,900 lm	Beam angle 90°	75006799	RC132V G6 36S/840 WIA W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	136 lm/W	2,900 lm	Beam angle 90°	73511899	RC132V G6 36S/840 PSU W30L120 NOC	140 lm/W	3,600 lm	Beam angle 120°
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	135 lm/W	4,300 lm	Beam angle 90°	73514999	RC132V G6 36S/840 PSU W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	135 lm/W	4,300 lm	Beam angle 90°	73517099	RC132V G6 36S/840 PSD W30L120 OC	140 lm/W	3,600 lm	Beam angle 90°
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	140 lm/W	2,900 lm	Beam angle 90°	73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	110 lm/W	5,000 lm	Beam angle 120°

CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	105 lm/W	4,800 lm	Beam angle 90°
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	105 lm/W	4,800 lm	Beam angle 90°
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	140 lm/W	3,600 lm	Beam angle 120°
31142999	RC132V 60S/840 PSU W60L120 OC	140 lm/W	6,000 lm	Beam angle 90°
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	133 lm/W	3,600 lm	Beam angle 90°
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	160 lm/W	3,600 lm	Beam angle 120°
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	160 lm/W	3,600 lm	Beam angle 90°
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
74984999	RC132V G6 50S/840 PSD W60L60 OC	130 lm/W	5,000 lm	Beam angle 90°
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	140 lm/W	3,600 lm	Beam angle 90°
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	140 lm/W	3,600 lm	Beam angle 90°
74999399	RC132V G6 34S/830 WIA W60L60 OC	130 lm/W	3,400 lm	Beam angle 90°
75000599	RC132V G6 36S/840 WIA W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°
75002999	RC132V G6 43S/840 WIA W60L60 OC	140 lm/W	4,300 lm	Beam angle 90°

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	140 lm/W	4,300 lm	Beam angle 90°
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	140 lm/W	4,300 lm	Beam angle 120°
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	130 lm/W	5,000 lm	Beam angle 90°
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	153 lm/W	3,600 lm	Beam angle 90°
75133099	RC132V G6 34S/830 PSU W60L60 NOC	130 lm/W	3,400 lm	Beam angle 120°
75134799	RC132V G6 34S/830 PSU W60L60 OC	130 lm/W	3,400 lm	Beam angle 90°
73509599	RC132V G6 36S/840 PSU W60L60 NOC	140 lm/W	3,600 lm	Beam angle 120°
73512599	RC132V G6 36S/840 PSU W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°
73515699	RC132V G6 36S/840 PSD W60L60 OC	140 lm/W	3,600 lm	Beam angle 90°
58861500	RC133V G6 36S/840 PSED W62L62 OC	134 lm/W	3,600 lm	Beam angle 90°
75004399	RC133V G6 36S/840 WIA W62L62 OC	140 lm/W	3,600 lm	Beam angle 90°
73510199	RC133V G6 36S/840 PSU W62L62 NOC	140 lm/W	3,600 lm	Beam angle 120°
73513299	RC133V G6 36S/840 PSU W62L62 OC	140 lm/W	3,600 lm	Beam angle 90°
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	115 lm/W	3,100 lm	Beam angle 90°
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	135 lm/W	4,300 lm	Beam angle 90°
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	140 lm/W	2,900 lm	Beam angle 90°

CoreLine Panel gen6

Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type	Order Code	Full Product Name	Luminous Efficacy (rated) (Nom)	Luminous Flux	Optic type
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	140 lm/W	2,900 lm	Beam angle 90°	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	135 lm/W	4,300 lm	Beam angle 90°
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	136 lm/W	2,900 lm	Beam angle 90°	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	140 lm/W	2,900 lm	Beam angle 120°
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	136 lm/W	2,900 lm	Beam angle 90°	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	140 lm/W	4,000 lm	Beam angle 90°
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	135 lm/W	4,300 lm	Beam angle 90°	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	140 lm/W	2,900 lm	Beam angle 90°
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	135 lm/W	4,300 lm	Beam angle 90°	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	140 lm/W	2,900 lm	Beam angle 90°

Operating and Electrical

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching	Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	220-240 V	50 to 60 Hz	32 W	No	73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	220-240 V	50 to 60 Hz	32 W	No	73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable
58879000	RC132VG6 29_36_43/830_40 PSU 30x120OCCCE	220-240 V	50 to 60 Hz	32 W	No	73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	220 to 240 V	50 or 60 Hz	45 W	Not applicable
58882000	RC132VG6 29_36_43/830_40 PSU 30x120OCWA3	220-240 V	50 to 60 Hz	32 W	No	73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	220 to 240 V	50 or 60 Hz	26 W	Not applicable
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	220-240 V	50 to 60 Hz	32 W	No	31142999	RC132V 60S/840 PSU W60L120 OC	220 to 240 V	50 or 60 Hz	43 W	Not applicable
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	220-240 V	50 to 60 Hz	32 W	No	58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	220-240 V	50 to 60 Hz	27 W	No
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	220-240 V	50 to 60 Hz	27 W	No	74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable
75006799	RC132V G6 36S/840 WIA W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74982599	RC132V G6 36S/UE840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	22.5 W	Not applicable
73511899	RC132V G6 36S/840 PSU W30L120 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74983299	RC132V G6 36S/UE840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable
73514999	RC132V G6 36S/840 PSU W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74984999	RC132V G6 50S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable
73517099	RC132V G6 36S/840 PSD W30L120 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74987099	RC132V G6 36S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	26 W	Not applicable

CoreLine Panel gen6

Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching	Order Code	Full Product Name	Input Voltage	Line Frequency	Power Consumption	Suitable for random switching
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	220 to 240 V	50 or 60 Hz	26 W	Not applicable	73510199	RC133V G6 36S/840 PSU W62L62 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable
74999399	RC132V G6 34S/830 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	73513299	RC133V G6 36S/840 PSU W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable
75000599	RC132V G6 36S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	38 W	Not applicable
75002999	RC132V G6 43S/840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable	83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	220-240 V	50 to 60 Hz	32 W	No
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	220 to 240 V	50 or 60 Hz	31 W	Not applicable	74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	220 to 240 V	50 or 60 Hz	38 W	Not applicable	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	220-240 V	50 to 60 Hz	32 W	No
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	220 to 240 V	50 or 60 Hz	23.5 W	Not applicable	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	220-240 V	50 to 60 Hz	32 W	No
75133099	RC132V G6 34S/830 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	220-240 V	50 to 60 Hz	32 W	No
75134799	RC132V G6 34S/830 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	220-240 V	50 to 60 Hz	32 W	No
73509599	RC132V G6 36S/840 PSU W60L60 NOC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	220-240 V	50 to 60 Hz	32 W	No
73512599	RC132V G6 36S/840 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
73515699	RC132V G6 36S/840 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
58861500	RC133V G6 36S/840 PSED W62L62 OC	220-240 V	50 to 60 Hz	27 W	No	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable
75004399	RC133V G6 36S/840 WIA W62L62 OC	220 to 240 V	50 or 60 Hz	26 W	Not applicable	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	220 to 240 V	50 or 60 Hz	31 W	Not applicable

Controls and Dimming

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level	Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	Yes	Interact SC200 sensor	10%	74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	Yes	-	1%
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	Yes	Interact SC200 sensor	10%	75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	Yes	-	1%
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	No	-	Not applicable	58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	-	Not applicable
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	Not applicable	75006799	RC132V G6 36S/840 WIA W30L120 OC	Yes	-	1%
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	Yes	-	10%	73511899	RC132V G6 36S/840 PSU W30L120 NOC	No	-	Not applicable
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	Yes	-	10%	73514999	RC132V G6 36S/840 PSU W30L120 OC	No	-	Not applicable
					73517099	RC132V G6 36S/840 PSD W30L120 OC	Yes	-	1%

CoreLine Panel gen6

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	Not applicable
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	Not applicable
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	Yes	-	1%
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	Not applicable
31142999	RC132V 60S/840 PSU W60L120 OC	No	-	Not applicable
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	-	Not applicable
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	Yes	-	10%
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	Yes	-	10%
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	No	-	Not applicable
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	Not applicable
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	Yes	-	1%
74984999	RC132V G6 50S/840 PSD W60L60 OC	Yes	-	1%
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	Not applicable
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	Not applicable
74999399	RC132V G6 34S/830 WIA W60L60 OC	Yes	-	1%
75000599	RC132V G6 36S/840 WIA W60L60 OC	Yes	-	1%
75002999	RC132V G6 43S/840 WIA W60L60 OC	Yes	-	1%
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	Not applicable
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	No	-	Not applicable
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	Not applicable
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	Yes	-	1%
75133099	RC132V G6 34S/830 PSU W60L60 NOC	No	-	Not applicable

Order Code	Full Product Name	Dimmable	Embedded control	Maximum dim level
75134799	RC132V G6 34S/830 PSU W60L60 OC	No	-	Not applicable
73509599	RC132V G6 36S/840 PSU W60L60 NOC	No	-	Not applicable
73512599	RC132V G6 36S/840 PSU W60L60 OC	No	-	Not applicable
73515699	RC132V G6 36S/840 PSD W60L60 OC	Yes	-	1%
58861500	RC133V G6 36S/840 PSED W62L62 OC	Yes	-	10%
75004399	RC133V G6 36S/840 WIA W62L62 OC	Yes	-	1%
73510199	RC133V G6 36S/840 PSU W62L62 NOC	No	-	Not applicable
73513299	RC133V G6 36S/840 PSU W62L62 OC	No	-	Not applicable
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	Yes	-	1%
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	Yes	Interact SC200 sensor	10%
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	No	-	Not applicable
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	Yes	-	1%
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	Not applicable
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	Not applicable
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	Yes	-	10%
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	Yes	-	10%
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	Yes	-	10%
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	No	-	Not applicable
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	Yes	-	1%
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	No	-	Not applicable
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	Yes	-	1%

Mechanical and Housing

CoreLine Panel gen6

Order Code	Full Product Name	Mech. impact protection code	Ingress protection code
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	IK02	IP20
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	IK02	IP20
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	IK02	IP20/44
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	IK02	IP20/44
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	IK02	IP20/44
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	IK02	IP20/44
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	IK02	IP20/44
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	IK02	IP20/44
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	IK03	IP20/44
75006799	RC132V G6 36S/840 WIA W30L120 OC	IK02	IP20/44
73511899	RC132V G6 36S/840 PSU W30L120 NOC	IK03	IP20/44
73514999	RC132V G6 36S/840 PSU W30L120 OC	IK02	IP20/44
73517099	RC132V G6 36S/840 PSD W30L120 OC	IK02	IP20/44
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	IK03	IP65
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	IK03	IP65
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	IK03	IP65
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	IK03	IP20/65
31142999	RC132V 60S/840 PSU W60L120 OC	IK03	IP20(IP44 front)
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	IK03	IP20/44
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	IK03	IP20/44
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	IK03	IP20/44
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	IK03	IP20/44
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	IK02	IP20/44
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	IK02	IP20/44
74984999	RC132V G6 50S/840 PSD W60L60 OC	IK02	IP20/44
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	IK02	IP20/40
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	IK02	IP20/40
74999399	RC132V G6 34S/830 WIA W60L60 OC	IK02	IP20/44
75000599	RC132V G6 36S/840 WIA W60L60 OC	IK02	IP20/44
75002999	RC132V G6 43S/840 WIA W60L60 OC	IK02	IP20/44

Order Code	Full Product Name	Mech. impact protection code	Ingress protection code
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	IK02	IP20/40
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	IK03	IP20/40
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	IK02	IP20/40
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	IK02	IP20/44
75133099	RC132V G6 34S/830 PSU W60L60 NOC	IK03	IP20/44
75134799	RC132V G6 34S/830 PSU W60L60 OC	IK02	IP20/44
73509599	RC132V G6 36S/840 PSU W60L60 NOC	IK03	IP20/44
73512599	RC132V G6 36S/840 PSU W60L60 OC	IK02	IP20/44
73515699	RC132V G6 36S/840 PSD W60L60 OC	IK02	IP20/44
58861500	RC133V G6 36S/840 PSED W62L62 OC	IK03	IP20/40
75004399	RC133V G6 36S/840 WIA W62L62 OC	IK02	IP20/40
73510199	RC133V G6 36S/840 PSU W62L62 NOC	IK03	IP20/40
73513299	RC133V G6 36S/840 PSU W62L62 OC	IK02	IP20/40
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	IK02	IP20/44
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	IK02	IP20
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	IK02	IP20/40
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	IK02	IP20/40
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	IK02	IP20/44
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	IK02	IP20/44
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	IK02	IP20/44
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	IK02	IP20/44
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	IK02	IP20/44
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	IK03	IP20/44
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	IK02	IP20/44
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	IK02	IP20/44
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	IK02	IP20/44

Emergency Operation (1/2)

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emerge lighting battery	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	No	-	-	-	58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	No	-	-	-
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	No	-	-	-	58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	No	-	-	-

CoreLine Panel gen6

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	No	-	-	-	58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	No	-	-	-						
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	No	-	-	-	58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	No	-	-	-						
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium	74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-
75006799	RC132V G6 36S/840 WIA W30L120 OC	No	-	-	-	74982599	RC132V G6 36S/UE840 PSU W60L60 OC	No	-	-	-
73511899	RC132V G6 36S/840 PSU W30L120 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	74983299	RC132V G6 36S/UE840 PSD W60L60 OC	No	-	-	-
						74984999	RC132V G6 50S/840 PSD W60L60 OC	No	-	-	-
73514999	RC132V G6 36S/840 PSU W30L120 OC	No	-	-	-	74987099	RC132V G6 36S/840 PSU W60L60 OC BN	No	-	-	-
73517099	RC132V G6 36S/840 PSD W30L120 OC	No	-	-	-	75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	No	-	-	-
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	No	-	-	-	74999399	RC132V G6 34S/830 WIA W60L60 OC	No	-	-	-
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	No	-	-	-	75000599	RC132V G6 36S/840 WIA W60L60 OC	No	-	-	-
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	No	-	-	-	75002999	RC132V G6 43S/840 WIA W60L60 OC	No	-	-	-
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	No	-	-	-	75127999	RC132V G6 43S/840 PSU W60L60 OC BN	No	-	-	-
31142999	RC132V 60S/840 PSU W60L120 OC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	No	Emergency lighting 3 hours duration basic version	250 lm	Lithium	75129399	RC132V G6 50S/840 PSU W60L60 OC BN	No	-	-	-
						75130999	RC132V G6 36S/UE840 WIA W60L60 OC	No	-	-	-

CoreLine Panel gen6

Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery	Order Code	Full Product Name	Central Emergency	Emergency lighting	Emergency flux	Type of emergency lighting battery
75133099	RC132V G6 34S/830 PSU W60L60 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-						battery kit accessory
						73513299	RC133V G6 36S/840 PSU W62L62 OC	No	-	-	-
						74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	No	-	-	-
						83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	No	-	-	-
75134799	RC132V G6 34S/830 PSU W60L60 OC	No	-	-	-	74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	No	-	-	-
73509599	RC132V G6 36S/840 PSU W60L60 NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-	74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	No	-	-	-
						58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	No	-	-	-
						58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	No	-	-	-
						58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	No	-	-	-
73512599	RC132V G6 36S/840 PSU W60L60 OC	No	-	-	-	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	No	-	-	-
73515699	RC132V G6 36S/840 PSD W60L60 OC	No	-	-	-	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	No	-	-	-
58861500	RC133V G6 36S/840 PSED W62L62 OC	Yes	DC operated central emergency lighting	540 lm	-	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	No	Self-contained emergency lighting is possible when used with a compatible battery kit accessory	380 lm	-
75004399	RC133V G6 36S/840 WIA W62L62 OC	No	-	-	-						
73510199	RC133V G6 36S/840 PSU W62L62 NOC	No	Self-contained emergency lighting is possible when used with a compatible	380 lm	-	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	No	-	-	-
						73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	No	-	-	-
						73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	No	-	-	-

Emergency Operation (2/2)

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)	Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	-	-	58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	-	-
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	-	-				

CoreLine Panel gen6

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	-	-
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	-	-
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	-	-
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-	-
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-	-
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	2 W	3 hour(s)
75006799	RC132V G6 36S/840 WIA W30L120 OC	-	-
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-	-
73514999	RC132V G6 36S/840 PSU W30L120 OC	-	-
73517099	RC132V G6 36S/840 PSD W30L120 OC	-	-
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	-
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-	-
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-	-
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	-
31142999	RC132V 60S/840 PSU W60L120 OC	-	-
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	2 W	3 hour(s)
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	2 W	3 hour(s)
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	2 W	3 hour(s)
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-	-
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-	-
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-	-
74984999	RC132V G6 50S/840 PSD W60L60 OC	-	-
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-	-
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-	-
74999399	RC132V G6 34S/830 WIA W60L60 OC	-	-
75000599	RC132V G6 36S/840 WIA W60L60 OC	-	-
75002999	RC132V G6 43S/840 WIA W60L60 OC	-	-

Order Code	Full Product Name	Power consumption during Central DC emergency mode	Rated duration of the emergency lighting (when fully charged)
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-	-
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-	-
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-	-
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-	-
75133099	RC132V G6 34S/830 PSU W60L60 NOC	-	-
75134799	RC132V G6 34S/830 PSU W60L60 OC	-	-
73509599	RC132V G6 36S/840 PSU W60L60 NOC	-	-
73512599	RC132V G6 36S/840 PSU W60L60 OC	-	-
73515699	RC132V G6 36S/840 PSD W60L60 OC	-	-
58861500	RC133V G6 36S/840 PSED W62L62 OC	-	-
75004399	RC133V G6 36S/840 WIA W62L62 OC	-	-
73510199	RC133V G6 36S/840 PSU W62L62 NOC	-	-
73513299	RC133V G6 36S/840 PSU W62L62 OC	-	-
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-	-
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	-	-
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-	-
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-	-
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	-	-
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	-	-
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	-	-
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	-	-
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	-	-
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-	-
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-	-
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-	-
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-	-

Approval and Application

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s
75006799	RC132V G6 36S/840 WIA W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73514999	RC132V G6 36S/840 PSU W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73517099	RC132V G6 36S/840 PSD W30L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
31142999	RC132V 60S/840 PSU W60L120 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	0 °C to 35 °C	-	Temperature 850 °C, duration 30 s
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
74984999	RC132V G6 50S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
74999399	RC132V G6 34S/830 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75000599	RC132V G6 36S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75002999	RC132V G6 43S/840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75133099	RC132V G6 34S/830 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
75134799	RC132V G6 34S/830 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73509599	RC132V G6 36S/840 PSU W60L60 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73512599	RC132V G6 36S/840 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73515699	RC132V G6 36S/840 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
58861500	RC133V G6 36S/840 PSED W62L62 OC	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
75004399	RC133V G6 36S/840 WIA W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73510199	RC133V G6 36S/840 PSU W62L62 NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73513299	RC133V G6 36S/840 PSU W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	0 °C to 35 °C	-	Temperature 650 °C, duration 30 s
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

CoreLine Panel gen6

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

Order Code	Full Product Name	Ambient temperature range	Flammability mark	Glow-wire test
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-10 to +35 °C	For mounting on normally flammable surfaces	Temperature 650 °C, duration 30 s

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial chromaticity
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	(0.38, 0.38) SDCM ≤3
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	(0.43, 0.40) SDCM <3
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	(0.38, 0.38) SDCM ≤3
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	(0.38, 0.38) SDCM ≤3
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	(0.38, 0.38) SDCM ≤3
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	(0.38, 0.38) SDCM ≤3
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	(0.38, 0.38) SDCM ≤3
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	(0.38, 0.38) SDCM ≤3
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	(0.38, 0.38) SDCM ≤3
75006799	RC132V G6 36S/840 WIA W30L120 OC	(0.38, 0.38) SDCM ≤3
73511899	RC132V G6 36S/840 PSU W30L120 NOC	(0.38, 0.38) SDCM ≤3
73514999	RC132V G6 36S/840 PSU W30L120 OC	(0.38, 0.38) SDCM ≤3
73517099	RC132V G6 36S/840 PSD W30L120 OC	(0.38, 0.38) SDCM ≤3
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	(0.38, 0.38) SDCM ≤3
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	(0.38, 0.38) SDCM ≤3
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	(0.38, 0.38) SDCM ≤3
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	(0.38, 0.38) SDCM ≤3
31142999	RC132V 60S/840 PSU W60L120 OC	(0.38, 0.38) SDCM ≤3
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	(0.38, 0.38) SDCM ≤3
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
74984999	RC132V G6 50S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	(0.38, 0.38) SDCM ≤3
74999399	RC132V G6 34S/830 WIA W60L60 OC	(0.43, 0.40) SDCM ≤3

Order Code	Full Product Name	Initial chromaticity
75000599	RC132V G6 36S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
75002999	RC132V G6 43S/840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	(0.38, 0.38) SDCM ≤3
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	(0.38, 0.38) SDCM ≤3
75130999	RC132V G6 36S/UE840 WIA W60L60 OC	(0.38, 0.38) SDCM ≤3
75133099	RC132V G6 34S/830 PSU W60L60 NOC	(0.43, 0.40) SDCM ≤3
75134799	RC132V G6 34S/830 PSU W60L60 OC	(0.43, 0.40) SDCM ≤3
73509599	RC132V G6 36S/840 PSU W60L60 NOC	(0.38, 0.38) SDCM ≤3
73512599	RC132V G6 36S/840 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
73515699	RC132V G6 36S/840 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
58861500	RC133V G6 36S/840 PSED W62L62 OC	(0.38, 0.38) SDCM ≤3
75004399	RC133V G6 36S/840 WIA W62L62 OC	(0.38, 0.38) SDCM ≤3
73510199	RC133V G6 36S/840 PSU W62L62 NOC	(0.38, 0.38) SDCM ≤3
73513299	RC133V G6 36S/840 PSU W62L62 OC	(0.38, 0.38) SDCM ≤3
74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3
83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	(0.38, 0.38) SDCM ≤3
74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	(0.38, 0.38) SDCM ≤3
74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	(0.38, 0.38) SDCM ≤3
58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	(0.38, 0.38) SDCM ≤3
58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	(0.38, 0.38) SDCM ≤3
58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	(0.38, 0.38) SDCM ≤3
58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	(0.38, 0.38) SDCM ≤3
58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	(0.38, 0.38) SDCM ≤3
74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	(0.38, 0.38) SDCM ≤3
75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	(0.38, 0.38) SDCM ≤3
73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	(0.38, 0.38) SDCM ≤3
73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	(0.38, 0.38) SDCM ≤3

Product Data


Order Code	Full Product Name	Product family code
58859200	RC132V G6 43S/840 SIA W60L60 OC IA4	RC132V
58860800	RC132V G6 40S/830 SIA W60L60 OC IA4	RC132V
58879000	RC132VG6_29_36_43/830_40 PSU 30x120OCCCE	RC132V
58882000	RC132VG6_29_36_43/830_40 PSU 30x120OCWA3	RC132V
58883700	RC132V G6 43S/830_40 PSD W30L120 OC WA5	RC132V

Order Code	Full Product Name	Product family code
58887500	RC132V G6 43S/830_40 WIA W30L120 OCWA3	RC132V
74989499	RC132V G6 29_36_43S/830_40 PSDW30L120OC	-
75132399	RC132V G6 40_43S/830_40 WIA 30x120 OC	-
58876900	RC132V G6 36S/840 PSU W30L120 OC ELB3	RC132V
75006799	RC132V G6 36S/840 WIA W30L120 OC	-


CoreLine Panel gen6

Order Code	Full Product Name	Product family code	Order Code	Full Product Name	Product family code
73511899	RC132V G6 36S/840 PSU W30L120 NOC	-	75130999	RC132V G6 36S/UE840 WIA W60L60 OC	-
73514999	RC132V G6 36S/840 PSU W30L120 OC	-	75133099	RC132V G6 34S/830 PSU W60L60 NOC	-
73517099	RC132V G6 36S/840 PSD W30L120 OC	-	75134799	RC132V G6 34S/830 PSU W60L60 OC	-
73523199	RC132V G6 50S/940 PSU W60L60 NOC IP65	-	73509599	RC132V G6 36S/840 PSU W60L60 NOC	-
73561399	RC132V G6 48S/940 PSU W60L60 OC IP65	-	73512599	RC132V G6 36S/840 PSU W60L60 OC	-
73562099	RC132V G6 48S/940 PSD W60L60 OC IP65	-	73515699	RC132V G6 36S/840 PSD W60L60 OC	-
73522499	RC132V G6 36S/840 PSU W60L60 NOC IP65_20	-	58861500	RC133V G6 36S/840 PSED W62L62 OC	RC132V
31142999	RC132V 60S/840 PSU W60L120 OC	-	75004399	RC133V G6 36S/840 WIA W62L62 OC	-
58873800	RC132V G6 36S/840 PSU W60L60 OC ELB3	RC132V	73510199	RC133V G6 36S/840 PSU W62L62 NOC	-
58874500	RC132V G6 36S/840 PSD W60L60 OC ELB3	RC132V	73513299	RC133V G6 36S/840 PSU W62L62 OC	-
58875200	RC132V G6 36S/840 WIA W60L60 OC ELB3	RC132V	74995599	RC132V G6 31_36_43S/940 PSD W60L60 OC	-
74981899	RC132V G6 36S/UE840 PSU W60L60 NOC	-	83523800	RC132V G6 43S/840 SIA W30L120 OC IA4	RC132V
74982599	RC132V G6 36S/UE840 PSU W60L60 OC	-	74991799	RC133V G6 29_36_43S/830_40 PSU W62L62 OC	-
74983299	RC132V G6 36S/UE840 PSD W60L60 OC	-	74992499	RC133V G6 29_36_43S/830_40 PSD W62L62 OC	-
74984999	RC132V G6 50S/840 PSD W60L60 OC	-	58878300	RC132VG6 29_36_43/830_40 PSU 60x60OC CCE	RC132V
74987099	RC132V G6 36S/840 PSU W60L60 OC BN	-	58880600	RC132VG6 29_36_43/830_40 PSU 60x60OC WA3	RC132V
75015999	RC132V G6 36S/840 PSU W60L60 OC BN6	-	58881300	RC132V G6 43S/830_40 PSD W60L60 OC WA5	RC132V
74999399	RC132V G6 34S/830 WIA W60L60 OC	-	58885100	RC132V G6 40/43S/830_840 WIAW60L60OCCCE	RC132V
75000599	RC132V G6 36S/840 WIA W60L60 OC	-	58886800	RC132V G6 43S/830_40 WIA W60L60 OC WA3	RC132V
75002999	RC132V G6 43S/840 WIA W60L60 OC	-	74990099	RC132V G6 29_36_43S/830_40 PSU W60L60NOC	-
75127999	RC132V G6 43S/840 PSU W60L60 OC BN	-	75131699	RC132V G6 40_43S/830_40 WIA 60x60 OC	-
75128699	RC132V G6 43S/840 PSU W60L60 NOC BN	-	73518799	RC132V G6 29_36_43S/830_40 PSU W60L60 OC	-
75129399	RC132V G6 50S/840 PSU W60L60 OC BN	-	73519499	RC132V G6 29_36_43S/830_40 PSD W60L60 OC	-


Polar Wide Diagrams

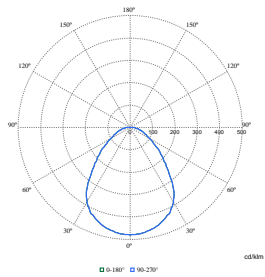


Polar Normal (separate) - RC132VI - 910505102804




Polar Normal (separate) - RC132VI - 910505102803




Polar Normal (separate) - RC132VI - 910505102818



Polar Normal (separate) - RC132VI - 910505102817




Polar Normal (separate) - RC132VI - 910505102829




Polar Normal (separate) - RC132VI - 910505102830


Polar Wide Diagrams




Polar Normal (separate) - RC132VI - 910505102825




Polar Normal (separate) - RC132VI - 910505102821




Polar Normal (separate) - RC132VI - 910505102822




Polar Normal (separate) - RC132VI - 910505102824




Polar Normal (separate) - RC132VI - 910505102819




Polar Normal (separate) - RC132VI - 910505102826



Polar Normal (separate) - RC132VI - 910505102802




Polar Normal (separate) - RC132VI - 910505102816




Polar Normal (separate) - RC132VI - 910505102828


Polar Wide Diagrams




Polar Normal (separate) - RC132VI - 910505102823




Polar Normal (separate) - 911401891085




Polar Normal (separate) - 911401890385




Polar Normal (separate) - 911401890685




Polar Normal (separate) - 911401890485




Polar Normal (separate) - 911401890785




Polar Normal (separate) - 911401890885




Polar Normal (separate) - 911401891285



Polar Normal (separate) - 911401890585




Polar Normal (separate) - 911401891185




Polar Normal (separate) - 911401890285

CoreLine Panel gen6


Polar Wide Diagrams

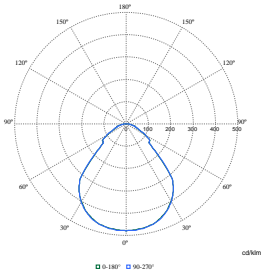


Polar Normal (separate) - 911401891685

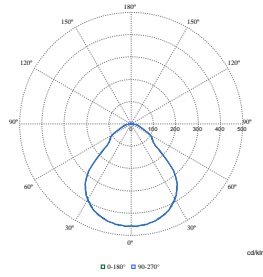


Polar Normal (separate) - 911401891785

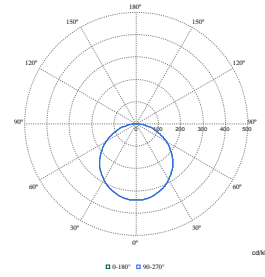


Polar Normal (separate) - 911401891585



Polar Normal (separate) - 911401891885

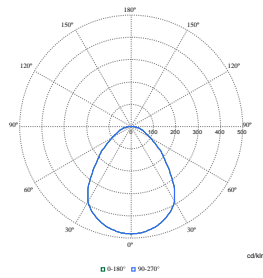

Polar Normal (separate) - 911401888287



Polar Normal (separate) - null - 910505104636

