



Product Description

Range of glow switches for igniting fluorescent lamps with electromagnetic gear. 2-pin ignitor in plastic (flame-retardant polycarbonate) canister and radio-interference suppression capacitor

Benefits

- Premium quality ensures trouble-free operation; extremely low early replacements reduce maintenance costs
- The world's only starters which are radioactive free and lead free, avoiding hazardous substances in manufacturing and recycling. Philips 'Green Flagship Award' for outperforming competitors
- Safe end-of-life behaviour prevents safety issues
- Redesigned canister top with a special notch; easy to install and replace with a screwdriver or with improved grip reducing installation time and cost
- Flame-retardant components for additional security
- Easily distinguished from counterfeit starters by specific shape with narrowed top, embossed range information and indented pins (patent-protected design)
- UV-resistant canister protects against unsafe conditions

Applications

- Fluorescent lamp systems with conventional electromagnetic ballast using TL-D (T8), TL (T12) and PL-L lamps
- S2 starters suitable for:
 - 110/130 V~, 4-22 W single applications
 - 220/240 V~, 4-22 W series applications
 - 220/240 V~, 4-6-8-15-18-22 W single applications
 - 220/240 V~, 18 W single application
- S10 starters suitable for:
 - 220/240 V~, 4-65 W single applications
 - 220/240 V~, 13 W single-application (S10 obligatory)
- Starter replacement recommended when replacing fluorescent lamps

Features


- Premium reliability with less than 100 early failures per million products (<100 ppm)
- Premium reliability with 10000 swiches guaranteed
- No hazardous radioactive isotopes used for activating the glow switch
- Lead-free and compliant with European RoHS legislation (Reduction of Hazardous Substances)
- Secure, safe and fast ignition on both inductive (L) and capacitive (LC) lighting systems acc. to IEC 60155
- Controlled preheating of the lamp filaments and sufficient pulse voltage for longer lamp life (>25% compared with cheap starters)
- Canister shape designed for a better grip while installing and replacing the starter
- Green insulation plate to identify these lead-free and radioactive-free environment-friendly starters
- Different green printing for visual distinction between S2 and S10 (S2 = light green / S10 = dark green)

Versions



LPPR STARTER 0001

Dimensional drawing

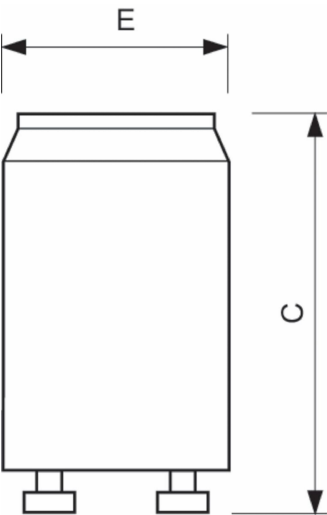

Product	C (max)	E (max)
S10 4-65W SIN 220-240V WH 2PF/10	40.3 mm	21.5 mm

Operating and Electrical

Voltage (Nom)220-240 V

Mechanical and Housing

Housing ColorWhite

Operating and Electrical

Order Code	Full Product Name	Power Consumption
37805600	S10 4-65W SIN 220-240V WH 2PF/10	4 W 65 W

