


SmartBright Pro Downlight DN068B


Mounting Instruction/ Petunjuk Instalasi/ Hướng dẫn lắp đặt/ คำแนะนำการติดตั้ง/ تعليمات التركيب

v1.0




Type / Tipe / Loai / نوع / النوع / رقم النوع	CCT (K)	Power(W) /Daya/ Công suất /حرارى / Watts	Lumen Output (lm) /Lumen keluaran/ Quantité de lumens (lm) /لumen الاصدار	Dimension /Dimensi/Kich thước /جهاز القياس/ الابعاد AxBxH (mm)	Cut-outs/Cut-out/ Dimensi ukuran potong/Cutout/القطع D(mm)	kg	Voltage /Tegangan /Điện áp /جهاز التيار	Frequency /Frekuensi /ردد /جهاز التردد
DN068B G2 LED6/830 PSU L100_I25 SQ	3000/4000/6500K	5.5W	570LM	155x155x35	95x95-130x130	0.086	220-240V~	50/60Hz
DN068B G2 LED6/840 PSU L100_I25 SQ		5.5W	600LM					
DN068B G2 LED6/865 PSU L100_I25 SQ		5.5W	600LM					
DN068B G2 LED9/830 PSU L100_I25 SQ		8W	855LM					
DN068B G2 LED9/840 PSU L100_I25 SQ		8W	900LM					
DN068B G2 LED9/865 PSU L100_I25 SQ		8W	900LM	170x170x35	140x140-150x150	0.133		
DN068B G2 LED11/830 PSU L150 SQ		11W	1140LM					
DN068B G2 LED12/840 PSU L150 SQ		11W	1200LM					
DN068B G2 LED12/865 PSU L150 SQ		11W	1200LM					
DN068B G2 LED15/830 PSU L150 SQ		15W	1520LM					
DN068B G2 LED16/840 PSU L150 SQ		15W	1600LM					
DN068B G2 LED16/865 PSU L150 SQ		15W	1600LM					


Dimension

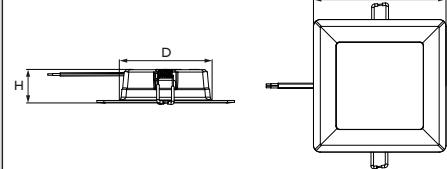



Power Connection

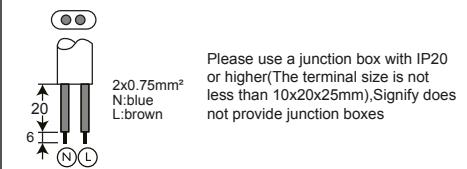

Ceiling requirement

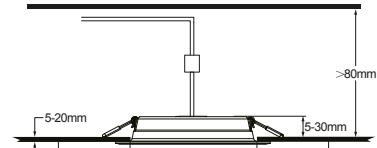

Cut-out

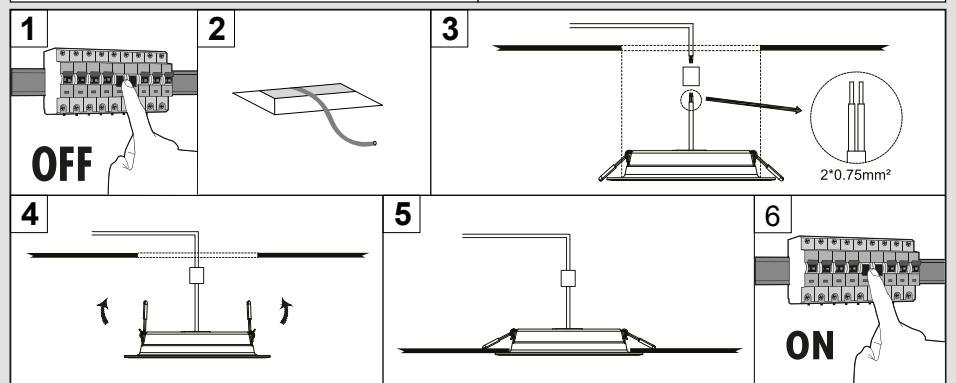

Signify Luminaires (Shanghai) Co., Ltd.

Address: 2F, Building 1


Postal code: 200233

昕诺飞灯具(上海)有限公司
地址: 上海市闵行区合川路2555号1幢二楼

地址：上海市
邮编：200233

邮编：200233

PHILIPS

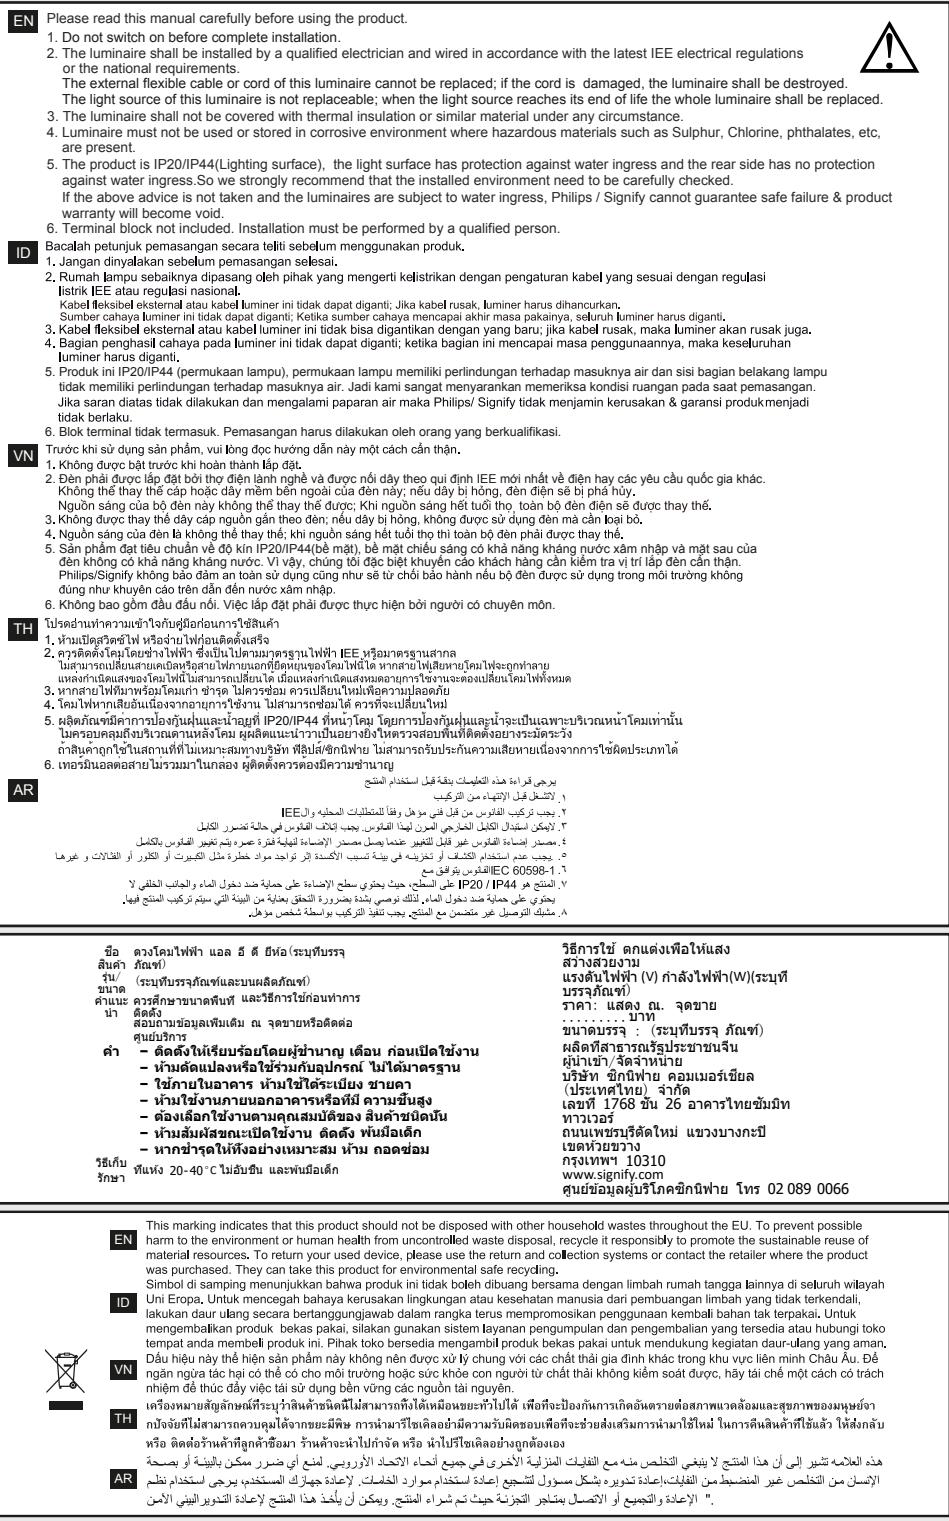

148*210mm/80g双胶纸/正反面黑白印刷