



CoreLine Panel gen6

RC132V G6 50S/840 PSD W60L60 OC

CoreLine Panel gen6, 38 W, 600x600 mm, VPC, 5000 lm, 4000 K, DALI, UGR19

600x600 mm, Visible profile ceiling version, Steel, White, Signal white (RAL9003), Power supply unit with DALI interface, 5000 lm, 38 W, 130 lm/W, 4000 K, (0.38, 0.38) SDCM ≤ 3 , UGR19, Beam angle 90°, Microprismatic lens, Polystyrene, IP20/44 | Finger-protected; wire-protected, splash-proof, IK02 | 0.2 J standard, Safety class II, Push-in connector 4-pole, SC | Safety cable

Product data

General Information	
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Value ladder	Performance
Warranty period	5 years
Light Technical	
Luminous Flux	5,000 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	130 lm/W
Color rendering index (CRI)	>80
Beam angle of light source	90 degree(s)
Light source color	840 neutral white
Optic type	Beam angle 90°
Luminaire light beam spread	90°
Unified glare rating CEN	19

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Inrush current	26.8 A
Inrush time	0.264 ms
Power Consumption	38 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 4-pole
Cable	-
Number of products on MCB of 16 A type B	15
Suitable for random switching	Not applicable
Protection class IEC	Safety class II
Total harmonic distortion	20 %
Controls and Dimming	
Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI

CoreLine Panel gen6

Constant light output	No
DALI Standard	DALI-2™
Maximum dim level	1%

Mechanical and Housing

Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover material	Polystyrene
Fixation material	-
Housing Color	White
Optical cover finish	Microprismatic lens
Overall length	595 mm
Overall width	595 mm
Overall height	63 mm
Dimensions (Height x Width x Depth)	63 x 595 x 595 mm
Compatible ceiling or ceiling installation accessory type	Visible profile ceiling version
Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK02 [0.2 J standard]
Safety device	SC [Safety cable]
Net Weight (Piece)	2.180 kg

Emergency Operation

Central Emergency	No
-------------------	----

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-10 to +35 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%
Initial chromaticity	(0.38, 0.38) SDCM ≤3
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L85
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L75

Sustainability Data


Sustainability rating	Unclassified
Repair class	Repair Class D, this product is not designed to be repaired.
Embedded carbon (A1-A3)	24.6 kg CO ₂ e
Product non-virgin material ratio	10.1 %
Recyclable content ratio of the finished product	47.9 %
GWP total B6 (kg CO ₂ eq) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO ₂ eq / kwh)
GWP total B6 (kg CO ₂ eq) Functional Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * 1000 (lm) / lumen output (lm) Declared Unit * 35000 (hrs) * Energy mix (kg CO ₂ eq / kwh)

Product Data


Order product name	RC132V G6 50S/840 PSD W60L60 OC
Full product name	RC132V G6 50S/840 PSD W60L60 OC
Full product code	872016974984999
Order code	74984999
Material Nr. (12NC)	911401800387
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169749849
Numerator - Packs per outer box	4
EAN/UPC - Case	8720169750104

CoreLine Panel gen6

Dimensional drawing

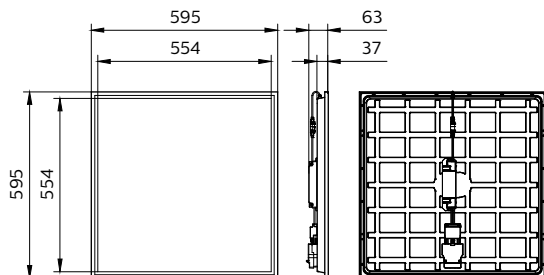

Photometric data

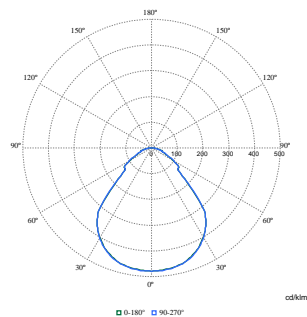

Polar Normal (separate) - 911401800387

