



GreenSpace

DN470B LED20S/830 PSU-E C ELP3 WH P

GreenSpace, downlight, 13.3 W, D200 mm, 1900 lm, 3000 K, High-gloss reflector, IP20, ELP3h

downlight, D200 mm, Polycarbonate, White, Signal white (RAL9003), Recessed, Power supply unit external (On/Off), 1900 lm, 13.3 W, 143 lm/W, 3000 K, (0.43, 0.40) SDCM<3, High-gloss reflector, IP20 | Finger-protected, IK02 | 0.2 J standard, Safety class II, Emergency lighting 3 hours duration Pro version

Product data

General Information	
Lamp family code	LED20S [LED Module, system flux 2000 lm]
Light source replaceable	No
Number of gear units	1 unit
Gear	-
Driver included	Yes
Service tag	Yes
Lighting Technology	LED
Mounting	Recessed
Value ladder	Specification
Warranty period	5 years
Light Technical	
Luminous Flux	1,900 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	143 lm/W
Color rendering index (CRI)	>80
Number of light sources	1

Beam angle of light source	- degree(s)
Light source color	830 warm white
Optic type	-
Luminaire light beam spread	120°
Unified glare rating CEN	22
Operating and Electrical	
Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Initial CLO power consumption	- W W
Average CLO power consumption	- W W
Inrush current	14 A
Inrush time	0.130 ms
Power Consumption	13.3 W
Power Factor (Fraction)	0.9
Connection	-
Cable	-
Number of products on MCB of 16 A type B	65
Suitable for random switching	Yes

Protection class IEC	Safety class II
Total harmonic distortion	20 %

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit external (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable

Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover material	-
Fixation material	-
Housing Color	White
Optical cover finish	-
Reflector Finish	High-gloss reflector
Overall height	94 mm
Overall diameter	216 mm
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Mounting	Recessed
Net Weight (Piece)	1.000 kg

Emergency Operation

Rated duration of the emergency lighting (when fully charged)	3 hour(s)
Additional max. power consumption when emergency battery is charging	4.5 W
Central Emergency	No
Emergency lighting	Emergency lighting 3 hours duration Pro version
Emergency function testing method	Automatic pre-programmed self testing
Emergency lighting operation mode	Maintained

Approval and Application

Glow-wire test	Temperature 750 °C, duration 30 s
Flammability mark	-
CE mark	Yes
ENEC mark	ENEC mark
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.

Ambient temperature range	+10 to +40 °C
---------------------------	---------------

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM<3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	1 %
Control gear failure rate at median useful life 50000 h	10 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L90
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	-

Sustainability Data


Sustainability rating	Unclassified
Repair class	Repair Class C, the driver of this luminaire can be replaced by a service technician. Special care is required during disassembly and reassembly, and specific tools may be required. Parts and documentation are available for a period of time.
Embedded carbon (A1-A3)	10.9 kg CO ₂ e
Product non-virgin material ratio	13.1 %
Recyclable content ratio of the finished product	47 %
GWP total B6 (kg CO ₂ eq) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO ₂ eq / kwh)
GWP total B6 (kg CO ₂ eq) Functional Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * 1000 (lm) /lumen output (lm) Declared Unit * 35000 (hrs) * Energy mix (kg CO ₂ eq / kwh)

Product Data


Order product name	DN470B LED20S/830 PSU-E C ELP3 WH P
Full product name	DN470B LED20S/830 PSU-E C ELP3 WH P
Full product code	871869979351700
Order code	79351700
Material Nr. (12NC)	912500100546
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699793517
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699793517

Product family code DN470B [200mm]

Dimensional drawing

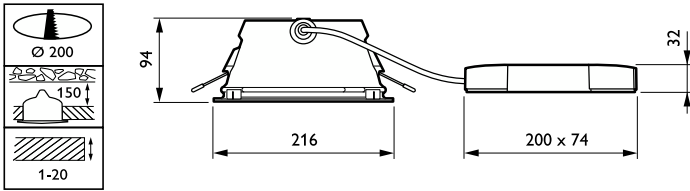

Photometric data



Polar Normal (separate) - DN460BN - 912500100546

