



GreenSpace

DN471B LED30S/840 PSU-E C ELP3 WH P

GreenSpace, downlight, 20.9 W, D200 mm, 2800 lm, 4000 K, UGR19, High-gloss reflector, IP20, ELP3h

downlight, D200 mm, Polycarbonate, White, Signal white (RAL9003), Recessed, Power supply unit external (On/Off), 2800 lm, 20.9 W, 135 lm/W, 4000 K, (0.38, 0.38) SDCM<3, UGR19, High-gloss reflector, IP20 | Finger-protected, IK02 | 0.2 J standard, Safety class II, Emergency lighting 3 hours duration Pro version

Product data

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Lighting Technology	LED
Mounting	Recessed
Value ladder	Specification
Warranty period	5 years
Light Technical	
Luminous Flux	2,800 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	135 lm/W
Color rendering index (CRI)	>80
Beam angle of light source	- degree(s)
Light source color	840 neutral white
Optic type	-
Luminaire light beam spread	120°

Unified glare rating CEN	19
Operating and Electrical	
Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Initial CLO power consumption	- W W
Average CLO power consumption	- W W
Inrush current	14.5 A
Inrush time	0.150 ms
Power Consumption	20.9 W
Power Factor (Fraction)	0.9
Connection	-
Cable	-
Number of products on MCB of 16 A type B	54
Suitable for random switching	Yes
Protection class IEC	Safety class II
Total harmonic distortion	20 %

Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit external (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable

Mechanical and Housing	
Housing Material	Polycarbonate
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover material	-
Fixation material	-
Housing Color	White
Optical cover finish	-
Reflector Finish	High-gloss reflector
Overall height	94 mm
Overall diameter	216 mm
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Mounting	Recessed
Net Weight (Piece)	1.000 kg

Emergency Operation	
Rated duration of the emergency lighting (when fully charged)	3 hour(s)
Additional max. power consumption when emergency battery is charging	4.5 W
Central Emergency	No
Emergency lighting	Emergency lighting 3 hours duration Pro version
Emergency function testing method	Automatic pre-programmed self testing
Emergency lighting operation mode	Maintained

Approval and Application	
Glow-wire test	Temperature 750 °C, duration 30 s
Flammability mark	-
CE mark	Yes
ENEC mark	-
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Ambient temperature range	+10 to +40 °C


Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM<3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

Over Time Performance (IEC Compliant)	
Driver failure rate at 5000 h	1 %
Control gear failure rate at median useful life 50000 h	10 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L90
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	-


Sustainability Data	
Sustainability rating	Unclassified
Repair class	Repair Class C, the driver of this luminaire can be replaced by a service technician. Special care is required during disassembly and reassembly, and specific tools may be required. Parts and documentation are available for a period of time.
Embedded carbon (A1-A3)	10.9 kg CO _{2e}
Product non-virgin material ratio	13.1 %
Recyclable content ratio of the finished product	47 %
GWP total B6 (kg CO _{2eq}) Declared Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * Service life (hrs) Declared Unit * Energy mix (kg CO _{2eq} / kWh)
GWP total B6 (kg CO _{2eq}) Functional Unit	Please calculate using your local energy mix value: Power Declared Unit (kW) * 1000 (lm) /lumen output (lm) Declared Unit * 35000 (hrs) * Energy mix (kg CO ₂ eq / kWh)

Product Data	
Order product name	DN471B LED30S/840 PSU-E C ELP3 WH P
Full product name	DN471B LED30S/840 PSU-E C ELP3 WH P
Full product code	871869994596100
Order code	94596100
Material Nr. (12NC)	912500101327
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699945961
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699945961
Product family code	DN471B [200mm + anti-glare ring]

Dimensional drawing

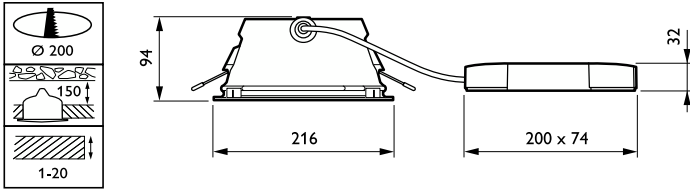

Photometric data



Polar Normal (separate) - DN460BN - 912500101327

